

REV.	ECH. NO.	APPD.
A	/	LXQ

备注:

电气性能:

- 接触阻抗: 50 毫欧 (最大)
- 绝缘阻抗: 100 兆欧 (最小)
- 耐高压: 100V AC 一分钟

材料:

- 胶芯: LCP/PBT
- 端子: 磷铜C5191
- 外壳: SPCC/C2680






电镀:

端子:

接触区域镀金
焊接区域镀亮锡40u"min

外壳:

全区域镀镍40u"min

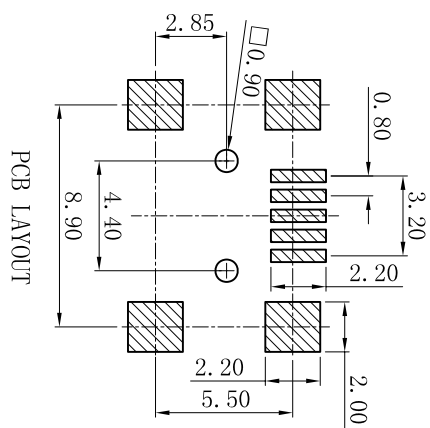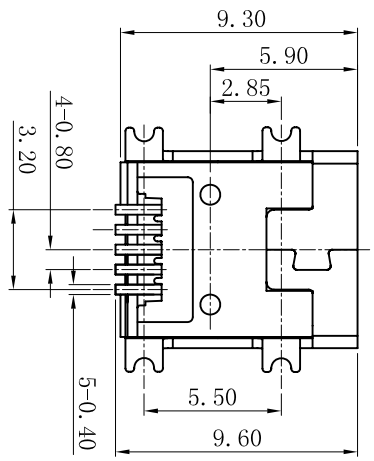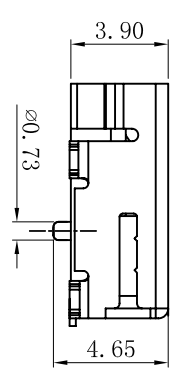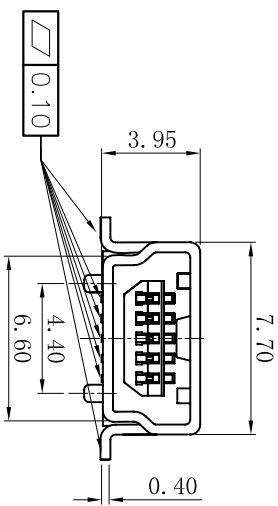

- U144-015X-XXXX1
- 1: 铁壳镀镍
 - 5: 铜壳镀镍
 - H: C5191 半金1u"亮锡
 - J: C5191 半金3u"亮锡
 - K: C5191 半金5u"亮锡
 - M: C5191 半金10u"亮锡
 - 1: PA66
 - 2: PBT
 - 6: LCP
 - 1: 吸塑盒
 - 2: 吸塑管
 - 3: 裁带
 - 6: 裁带+贴麦拉
 - 1: 黑色
 - 2: 白色
 - 3: 米黄色

深圳市顺宏康科技有限公司

MINI SP/包/SMT

TOLERANCE UNLESS OTHERWISE SPECIFIED	XXX ±0.10	X' ±3
	XX ±0.20	.XX ±2
	X ±0.30	.X ±2
APPROVED		
CHECKED		
DRAWN	leixiangqiang	
DATE	2014.08.12	
PART NAME:		
PART No:		
PROJECTION:		
UNIT:	mm	
SCALE	1:1	
SHEET	10F-1	
REV.		A

