

规格说明: Specification:

电气特性: Electrical:

- 1 额定电流: Current Rating: 5A / 额定电压: Voltage Rating: 30V DC
- 2 接触电阻: Contact Resistance: 30 milliohms MAX
- 3 耐压: Dielectric Withstanding Voltage: 500 V AC AT Sea Level
- 4 绝缘电阻: Insulation Resistance: 1000 MEGA OHMS MIN

物理性能: Mechanical:







- 1 插拔力: Contact Mating Force: 3 ~ 57kgf (MAX)
- 2 端子保持力: Terminal Retention Force: 1 ~ 2kgf (MIN)

原材料: Material:

- 1 塑胶: Housing: High Temperature Thermoplastics, UL 94V0 PBT White/Black
- 2 端子: Contact: Copper Alloy C2680
- 3 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 1 端子: Contact: Plated Gold Finger Area; Thickness: 10um
- 2 外壳: Shell: Nickel Plating

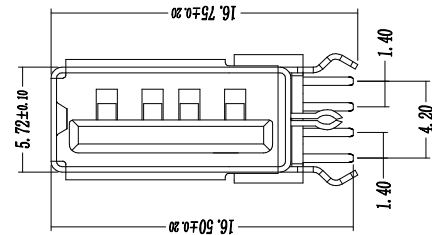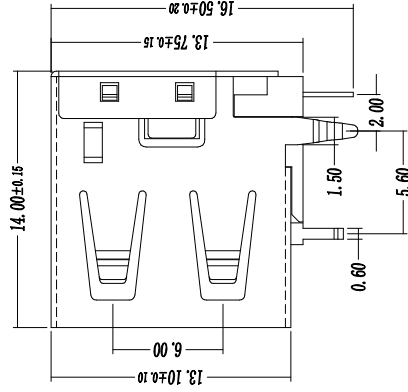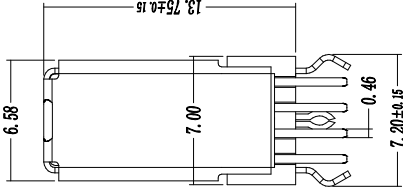

SECTION A-A

PCB LAYER: UT (BOTTOM VIEW)

深圳市顺宏康科技有限公司



品名 (ITEM NO)

料号 (PART NO)

模号 (MODEL NO)

SHK-20083

A008-11

图号 (DWG NO)

版本 (REV)

日期 (DATE)

设计 (DESIGN)

审核 (CHECKED)

核准 (APPROVED)

A/0

单位 (UNIT): MM

比例 (SCALE) 1:1



未注公差

TOLERANCE UNSPECIFIED

- X.X ±0.30
- X.XX ±0.20
- X.XXX ±0.10
- X.X° ±5°
- X.X° ±2°