


Max	Modification	Date	Draw	Approve
?	?	?	?	?
?	?	?	?	?
?	?	?	?	?

规格说明: Specifications:

电气特性: Electrical:

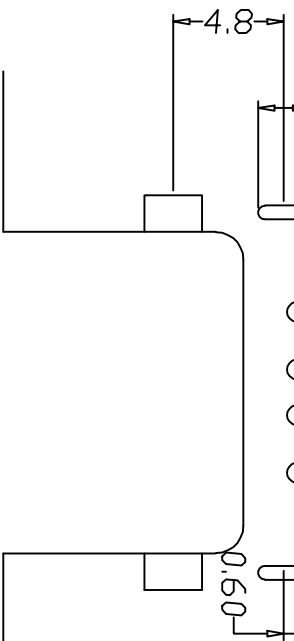

- 1. 额定电流: Current Rating  
1.5A/contact terminal
- 2. 额定电压: Voltage Rating  
30V DC
- 3. 接触阻抗: Contact Resistance  
30 milliohms MAX
- 4. 额定电压: Dielectric Withstanding Voltage:  
500 V AC AT Sea Level
- 5. 绝缘阻抗: Insulation Resistance:  
1000MEGA ohms MIN

物理性能: Mechanical:

- 1. 插拔力: Connector Mate and Unmate Force  
Mate force: 3.57kgf(MAX)  
Unmate force: 1.02kgf(MIN)
- 2. 端子保持力: Terminal Retention  
1.0kgf(MIN)


原材料: Material:

- 1. 塑胶: Housing:  
Hing Temperature Ternmaplastics,
- 2. 端子: Contact: Copper Alloy C2680
- 3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 1. 端子: Contact: Plated Gold in Mating Area;  
Tin On Solder Tails
- 2. 外壳: Shell:  
铜壳四周镀80U”(MIN)镍  
镀金区域镀100-200U”镀金1U”

Nickel Plating

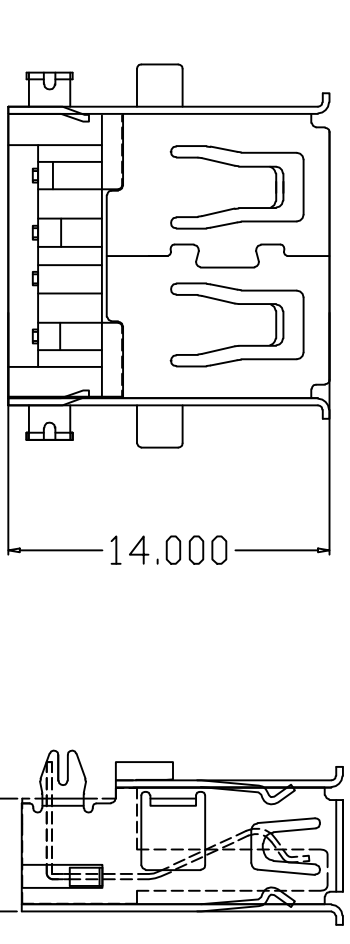

深圳市顺宏康科技有限公司

DRAWING NO. DWGNO. 版本 VER SHEET

MANUFACTURE DWG	公差 一级表	日期 DATE	检查 CHECKED	批准 APPROVE	设计 DESIGN	版本 VER	页 SHEET
TOLERANCE UNLESS OTHERWISE	XX±0.15	X±5°	X±2°	XXX±0.02	XX±1°		
DATE	UNIT	比例 SCALE	APPROVAL	NEW	SIK-20100		
	MM	1:1					