

规格说明: Specifications:

电气特性: Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf<MAX>
Unmate force: 1.02kgf<MIN>
2. 端子保持力: Terminal Retention
1.2kgf<MIN>

原材料: Material:

1. 塑胶: Housing:





Hing Temperature Thermoplastics,
PBT White/Black

2. 端子: Contact: Copper Alloy C2680

3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin In Solder Tails
2. 外壳: Shell: Nickel Plating

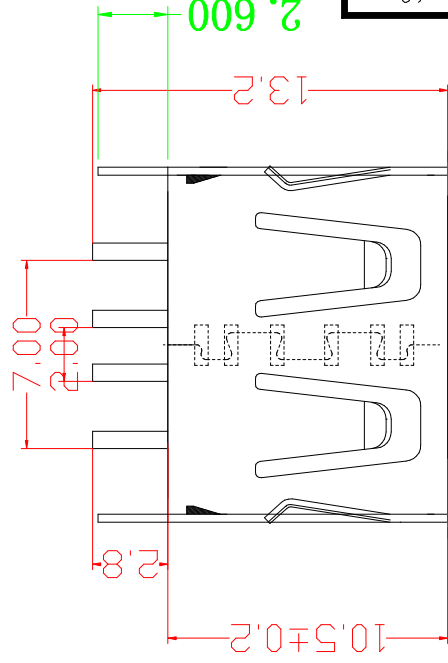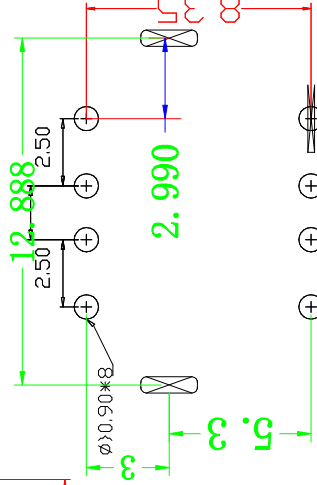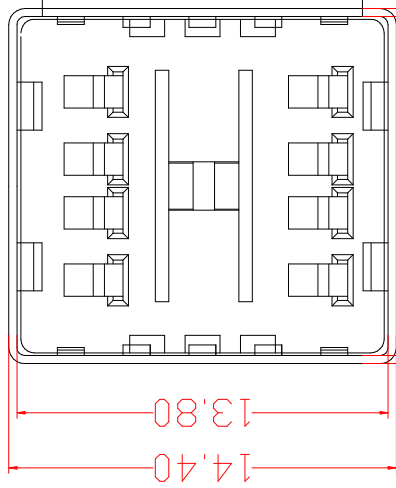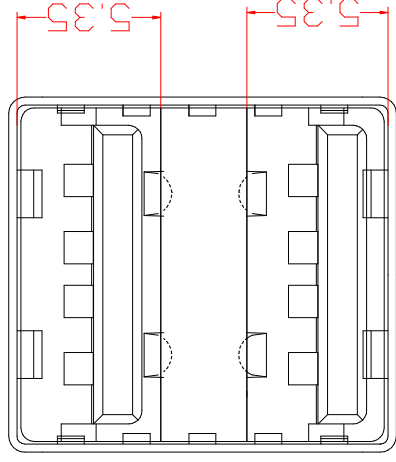

RECOMMENDED P. C. B. PATTERN LAY OUT

UNLESS OTHERWISE SPECIFIED TOLERANCE

- .X ±0.20
- .XX ±0.15
- .XXX ±0.10
- ANG. ±2°

RECOMMENDED P. C. B. PATTERN LAY OUT

DRAWN H.Q.huocuy

APPROVED

DATE

UNIT MM

SCALE 3/1

SIZE A4

TITLE USB AF 双层直插10.5MM直边鱼叉脚

PART NO. SHK-20128

DOC. NO. A

REV.

A

深圳市顺宏康科技有限公司

