
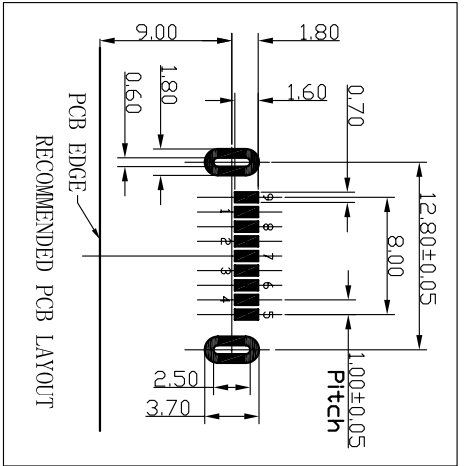
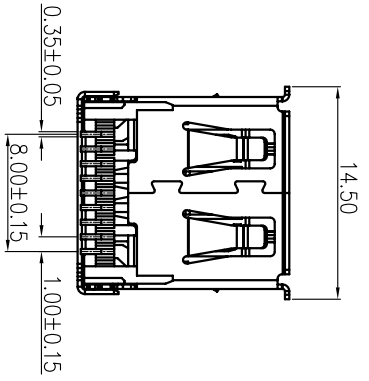
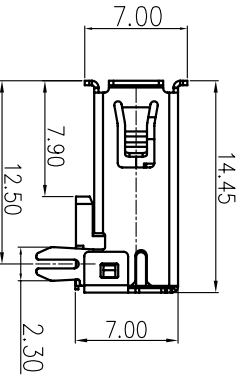
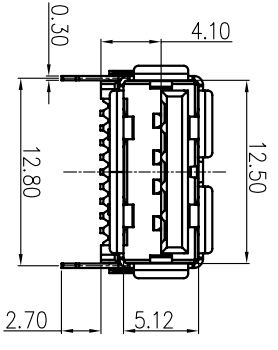




| REV. | ECN NO. | APPD. |
|------|---------|-------|
| A | / | LXQ |



NOTE:

- MATERIAL:
 - INSULATOR: LCP+30%GF UL 94V-0 BLUE 300C
 - CONTACT: C2680R-H
 - SHELL: BRASS
- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 30mΩ MAXIMUM
 - CONTACT CURRENT RATING: 1.5A
 - DIELECTRIC WITHSTANDING VOLTAGE: 100 V AC R.M.S.
 - INSULATION RESISTANCE 100 MEGOHMS MIN
 - OPERATING TEMPERATURE: -55° C ~ 85° C
- MECHANICAL CHARACTERISTICS:
 - MATING FORCE: 3.57kgf MAX
 - UNMATED FORCE: 0.82kgf MIN AFTER TEST
 - DURABILITY MANDATORY: 5,000 CYCLES
- PLATING
 - TERMINAL:
 - 40u" MIN NICKEL ALL OVER
 - 40u" MIN Tin ON SOLDER AREA
 - 1u" Au ON CONTACT AREA
 - SHELL: 40u" MIN NICKEL ALL OVER

- U322-013X-XXXXX1
- 1: Iron alloy
 - Ni plating
 - 5: Copper alloy
 - Ni plating
 - 1: Au 1u"
 - 3: Au 3u"
 - 5: Au 5u"
 - 7: Au 10u"
 - 8: Au 15u"
 - A: Au 30u"
 - 1: PA66
 - 2: PBT
 - 6: LCP
 - 1: troy
 - 2: Tube
 - 8: Tape&Reel
 - 9: Tape&Reel+Mylar
 - 1: Black
 - 7: Blue 300C
 - 8: Blue 300C-1
 - C: Blue 300C-2
 - E: Blue 300C-3
 - 9: Carbon black425C

深圳市顺宏康科技有限公司

| TOLERANCE UNLESS OTHERWISE SPECIFIED | OTHERWISE SPECIFIED |
|--------------------------------------|---------------------|
| XXX ±0.10 | XX ±0.20 |
| .X | ±0.30 |
| .X | XX ±Z |

PART NAME: USB 3.0 AP SMT 插脚

| | | | | | | | |
|----------|-----------|-------------|-----------|-------|-------|-------|------|
| APPROVED | | PART No: | SHK-30136 | UNIT: | SCALE | SHEET | REV. |
| CHECKED | | PROJECTION: | | mm | 1:1 | 10F1 | A |
| DRAWN | 雷先强 | | | | | | |
| DATE | 2014.12.6 | | | | | | |

| | | | | | |
|------|-----------|-------|-------|-------|------|
| DATE | 2014.12.6 | UNIT: | SCALE | SHEET | REV. |
| | | mm | 1:1 | 10F1 | A |