




9	8	7	6	5	4	3	2	1	
ECN NO.		ECN DESCRIPTION		REV.	DATE	APPD.			
/		/		A	2014.09.27	pcy			

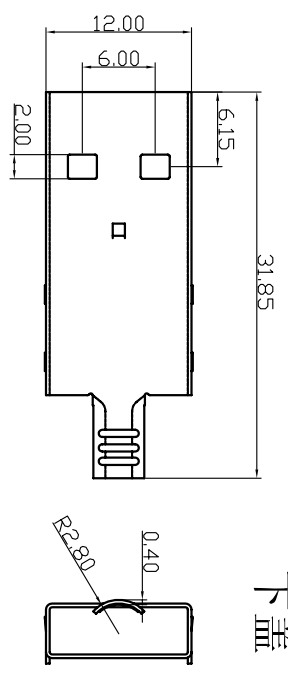




下盖

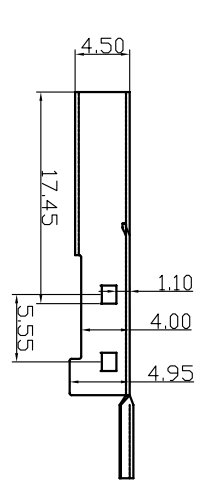

半成品

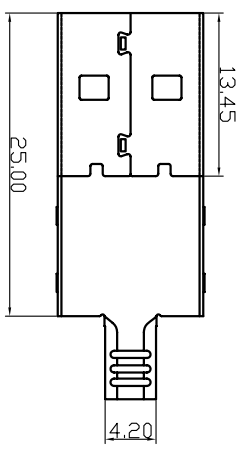

上盖

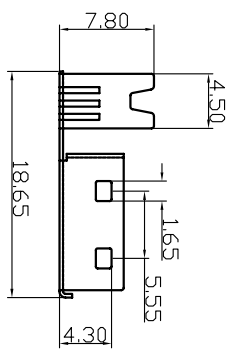

- U315-014X-XXXXXR
- 1:Iron alloy
 - Ni plating
 - 5:Copper alloy
 - Ni plating
 - 1:Au 1u"
 - 3:Au 3u"
 - 5:Au 5u"
 - 7:Au 10u"
 - 8:Au 15u"
 - A:Au 30u"

- 1:tray
- 2:Tube
- 7:PE Bag
- 1:Black
- 7:Blue 300C
- 8:Blue 300C-1
- C:Blue 300C-2
- E:Blue 300C-3
- 9:Carbon black425C
- 1:PA66
- 2:PBT
- 6:LCP

- Remark:
- 1.MATERIAL:
 - 1.1 Housing:thermoplastic plastics.
 - 1.2 terminals:Copper Alloy
 - 1.3 Front Shell:Copper Alloy/SPCC.
 - 2.Characteristics:
 - 2.1 Rating Voltage : 30V AC.
 - 2.2 Rating Current:PIN1&PIN4(Vbus&Corresponding ground PIN)
 - 2.3 Contact Resistance:PIN1&PIN4:30 mΩ MAX. Other PINS: 50 mΩ
 - 2.4 Insulation Resistance:100 MΩ MIN.
 - 2.5 Withstanding Voltage:AC 100V between adjacent contacts
 - 2.6 Mating force: 3.57Kgf MAX(35N MAX)
 - 2.7 Extraction force:1Kg Min(9.8N Min)
 - 2.8 Life Test:1500Cycles MIN.
 - 2.9 Temperature Range: -30C~+80C.

深圳市顺宏康科技有限公司

PART NAME: USB 3.0 MM三件式

PART No: SHK-30139

DATE	2014.09.27	PROJECTION:	UNIT:	SCALE	SHEET	REV.
CHECKED	pengchaoyong		mm	1:1	10F1	A
DRAWN						
APPROVED						

9 8 7 6 5 4 3 2 1