


RoHS
Compliant

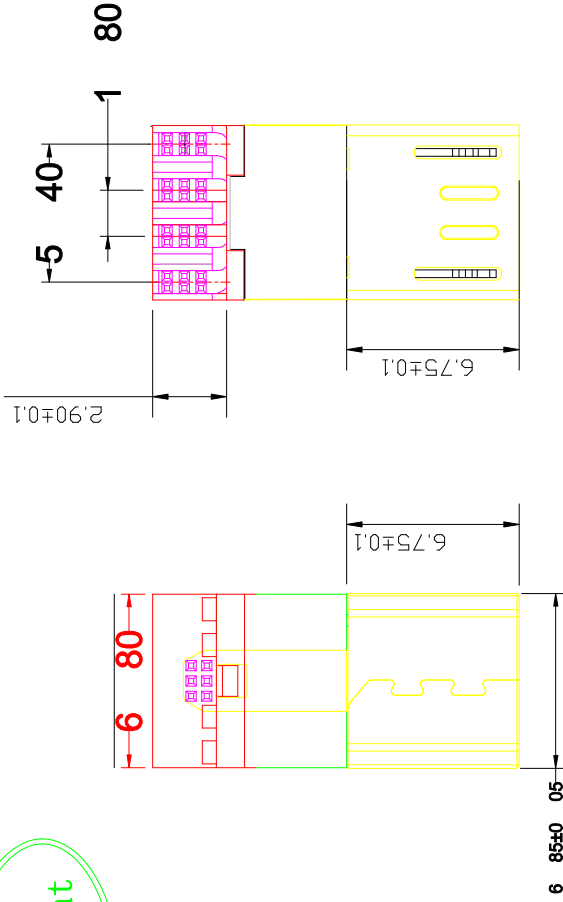

MICRO-USB-5PIN SOLDER TAIL
焊线式

特性: Specifications
电器 Electrical:

接触阻抗: Contact Resistance
30milliohms MAX

耐电压: Dielectric Withstanding Voltage
50V AC AT sea Level

绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

材料: Matorial:

塑胶: Housing:Hing Temperature Thermoplastics,
UL 94V-0LCP料耐高温塑胶

端子: Contact:C5191

外壳: copper: 不锈钢 SUS201

电镀: Finish:

端子: Contact: Plated Gold in Mating Area;
Tin/Lead On Solder Tails
接触点镀金lu, 脚镀锡铅

外壳: Shell:



Tin/Lead Piating 镀镍

Ordering Informating

X-5-XX X

contact plating
01-Gold Flash

Plastic Color
A=Black

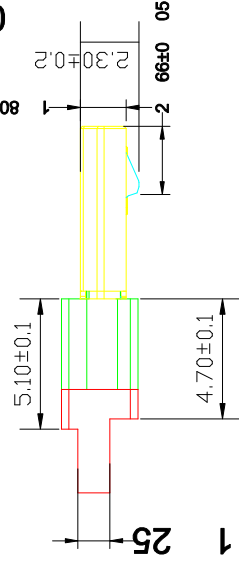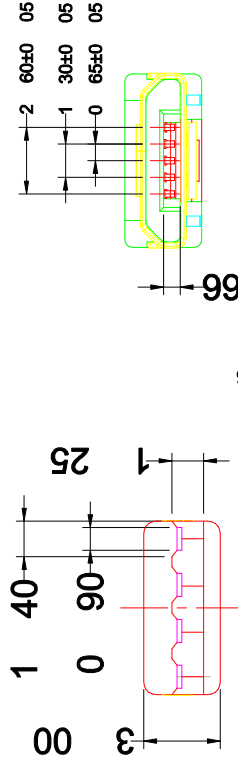

深圳市顺宏康科技有限公司

品名 (ITEM NO)	MICRO USB-超薄3.0迈克5P短款
料号 (PART NO)	SHK-20241
模号 (MODEL NO)	SEW-003

图号 (DWG NO)	SEW-MINI-013	单位 (UNIT): MM
版本 (REV)	A/0	比例 (SCALE) 1:1
日期 (DATE)	2011/11/11	未注公差 TOLERANCE UNSPECIFIED
设计 (DESIGN)	胡庆	X.X ±0.15
审核 (CHECKED)	/	X.XX ±0.10
核准 (APPROVED)	陈勇	X.XXX ±0.05
		X.X* ±5°
		X.X* ±2°

ECN NO.	DESCRPTION	REVISER	DATE
3			
2			
1			