



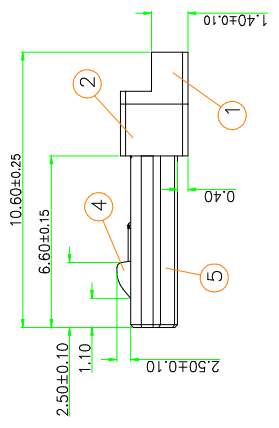


版本	变更内容	日期	ECN NO.	修改人
A/0				



Specification

- Electrical Characteristics:  
 Contact Current Rating:1.0A  
 Dielectric Withstanding Voltage:AC 100V R.M.S.  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:30mΩ Max.
- Environmental:  
 Operating Temperature: -30°C~+85°C.
- Mechanical Characteristics:  
 Matching Cycles:10000 Cycles.  
 Contact Insertion Force:35N Max.  
 Contact Separation Force:8-25N Min.

5	Outer Shell	SUS	t:0.20	1	PLATED NI
4	LATCH	SUS	t:0.40	2	NO PLATED
3	Brass Contact Terminal	C2680RH	t:0.20	5	Gold Plating AND TIN
2	Plastic Housing	LCP		1	Black G30-94V0
1	Plastic Housing	LCP		1	Black G30-94V0
NO.	NAME	MATERIAL	QTY.	REMARK	

# 深圳市顺宏康科技有限公司

X. ±0.35	X. ±4'	UNIT:	mm	DR:		TITLE:	MICRO USB 5P B公超导体线式前5后5(L=10.75)
.X ±0.25	.X ±2'	3RD:	⊕	DE:		SHEET:	1/1
.XX ±0.15	.XX	SCALE:	1:1	CHKD:		D/N:	CCM-01
.XXX ±0.05	.XXX	REV:	A/0	APPD:		P/N:	SHK-20244
CUSTOMER DRAWING							