
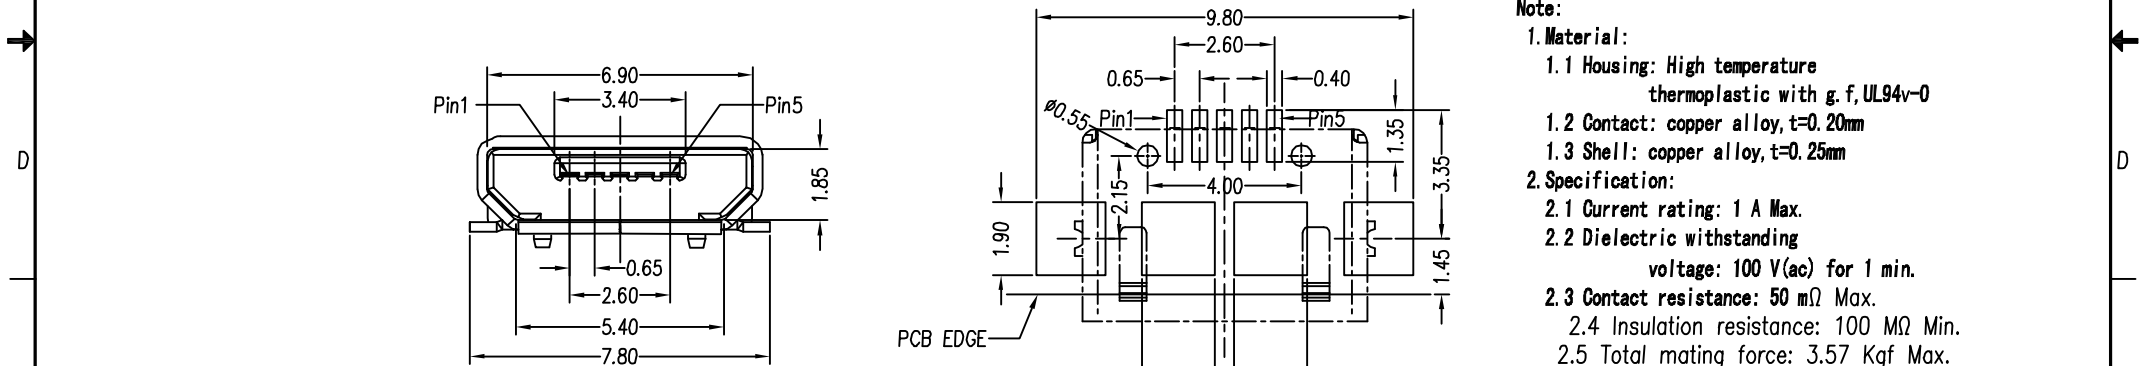


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVSER	APPD

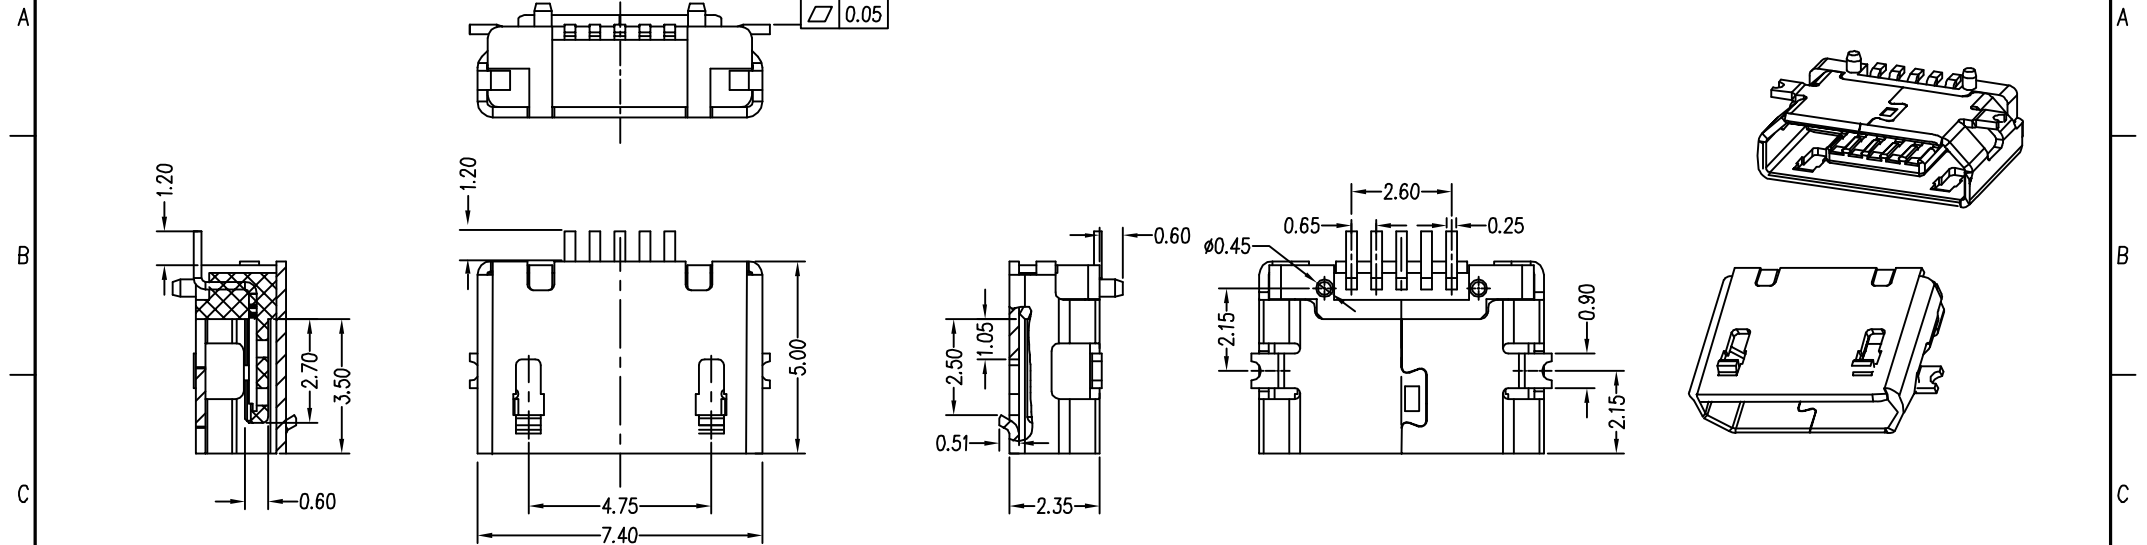

- Note:**
- Material:**
 - Housing: High temperature thermoplastic with g.f, UL94v-0
 - Contact: copper alloy, t=0.20mm
 - Shell: copper alloy, t=0.25mm
 - Specification:**
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 50 mΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min. 0.81~2.05 Kgf Min. after 10000 insertion/extraction cycles
 - Temperature range: -30°C~80°C

Order Information:
1-MD05SMXXX-01
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- | | | | |
|----------------|-----------|-------------------|------------------|
| 1: Assy. | 5: Style | 7: Cotact plating | 8: Shell plating |
| 2: Series No. | M: Smt | 1: 1u" | T: Tin |
| 3: Contact No. | 6: Color | 2: 3u" | N: Nickel |
| 05: 5 pos. | B: Black | 3: 5u" | A: Au plated all |
| 4: P: Plug | W: White | 4: 15u" | B: None |
| S: Socket | N: Nature | 5: 30u" | ... |

No.	Name	Q'ty	Finish
3	Shell	1	N/A
2	Contact	5	N/A
1	Housing	1	N/A

PART NO: 1-MD05SMXXX-01		MATERIAL: SEE NOTE
MODEL NO:		FINSH: SEE NOTE
UNIT: mm	SIZE: A4	COLOR: SEE NOTE
TOLERANCE UNSPECIFIED		DR: ???
.x	±0.38	CHK:
.xx	±0.25	APP:
.xxx	±0.13	
ANG.	±2°	

深圳市顺宏康科技有限公司

TITLE: Micro usb 5s B Type Smt有脚柱
 CUSTOMER DRAWING 焊脚加长1.2 无导位

DWG NO: A055	SHK-20039	REV: A
SCALE: 1:1	SHEET: 2008/05/22	

