
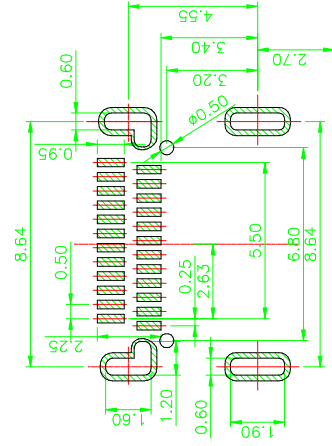
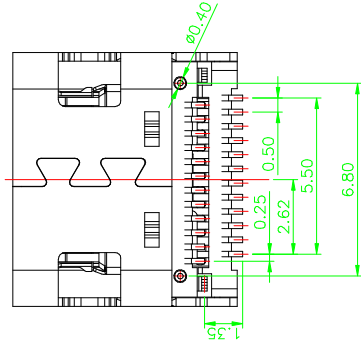
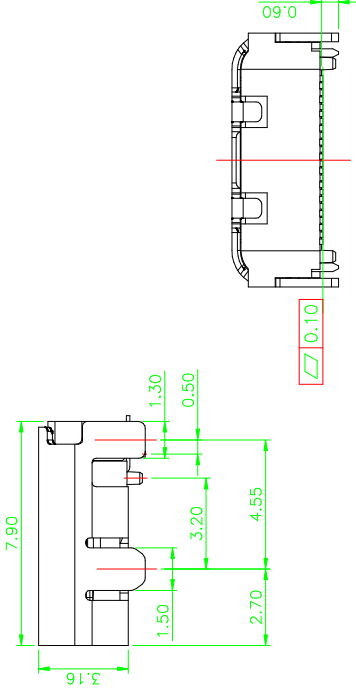
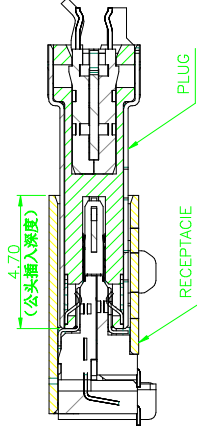

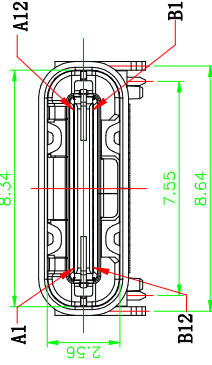


客户图



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

| REV | LTR | DESCRIPTION | DATE | APPROVED |
|-----|-----|-------------|----------|----------|
| A0 | | | 20141125 | LTY |

备注:

1. 材质:
 - 1.1 胶芯: LCP+30%G.F UL94V-0 黑胶
 - 1.2 端子: C5210, 镍底, 镀金
 - 1.3 外壳: 不锈钢, 表面镀镍
 - 1.4 卡钩: 不锈钢, 表面镀镍
 - 1.5 弹片: 不锈钢,
2. 主要特性:
 - 2.1 额定电流: 5A
 - 2.2 接触阻抗: 30mΩ MAX
 - 2.3 绝缘阻抗: 100MΩ MIN 250V DC
 - 2.4 耐压测试: 250V AC
 - 2.5 沾锡性: 温度250±5°C, 时间5±0.5s
 - 2.6 整体插入力: 3.57kgf MAX
整体拔出力: 1.02kgf MIN
耐久: 10000次



| | |
|--|-----------------------------------|
| TOLERANCES .X ±0.15 .XX ±0.10 .XXX ±0.05 ANGLES ±2.00° | TITLE: USB 3.1 Type-C母座插板双SMT 24P |
| APPD.: | PART NO.: SHK-31263 |
| CHECK: | DRAWING NO.: |
| DRAWN: LTY | REV.: A/0 |
| UNIT: M M | SCALE: 1 : 1 |
| SIZE: A4 | SHEET: 1 / 1 |

深圳市顺宏科技有限公司