
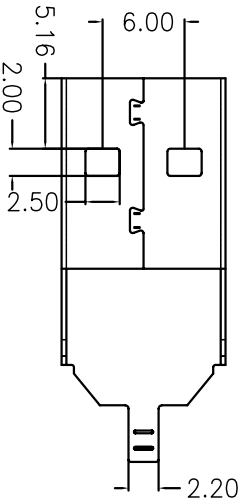
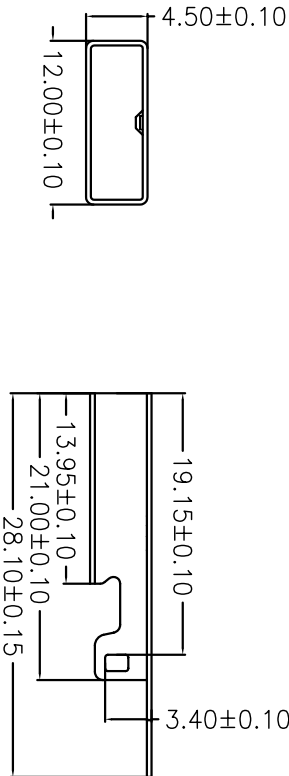

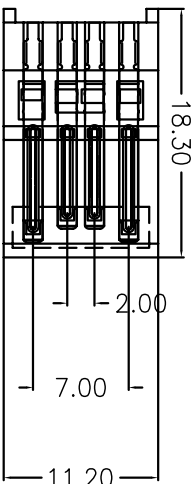



目錄 MAPX	變更內容 MODIFICATION	日期 DATE
A0	NEW	09-10-20

NOTES:
Housing: Thermoplastics, UL94V-0
Contact: Copper Alloy
Shell: Copper Alloy/Steel
Voltage Current Rating:1.5 AMP, 30V AC
Insulation Resistance:1000MΩ Min.
Contact Resistance:30 MΩ Max.
Dielectric Withstanding Voltage:500V AC
Temperature Range:-55° C to +85° C
Insulator color: Black/White
Plastic material: PBT/LCP
Shell finish: Nickel plated/Tin-Lead plated
Contact finish:
01: Selective Gold Flash
02: Selective Gold 3U"
03: Selective Gold 5U"
04: Selective Gold 15U"
05: Selective Gold 30U"

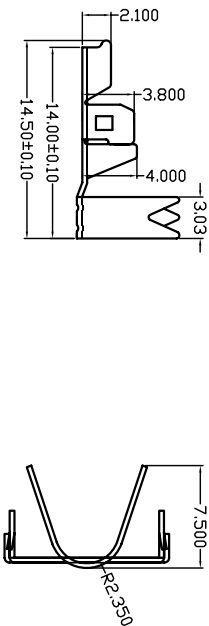

產品圖 PRODUCT CHART DWG				深圳市順宏康科技有限公司			
公差一覽表 TOLERANCE UNLESS OTHERWISE				單位 UNITS	制圖 DRAWING	審核 CHECK	產品料單 PRODUCT PART NO.
X	±0.15	X'	±5°	MM	黃陳平	雷永健	SHK-20292
.X	±0.10	.X'	±2°	比例 SCALE	1:1	雷永健	產品名稱 PRODUCT NO.
.XX	±0.05	.XX'	±1°	日期 DATE	2009/10/20	雷永健	USB AM短体28MM三件套0D5.0
.XXX	±0.03	.XXX'	±0.5°	核准 APPRO			角法 VIEW
							版本 VER
							A0