


- NOTES:
- ELECTRICAL CHARACTERISTICS:
    - 1-1 CURRENT RATING: 1 Amp/PIN. MAX.
    - 1-2 VOLTAGE: 30V DC. MAX.
    - 1-3 LOW LEVEL CONTACT RESISTANCE: 30 mohms MAX. INITIALLY.
    - 1-4 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
    - 1-5 INSULATION RESISTANCE: 100Mohms MIN. (DC 500V FOR 1 MINUTE)
  - MECHANICAL CHARACTERISTICS:
    - 2-1 DURABILITY: 1500 CYCLES
    - 2-2 OPERATING FORCE (INSERTING & WITHDRAWAL): 1N-10N.
  - ENVIRONMENTAL CHARACTERISTICS:
    - 3-1 OPERATING TEMP. RANGE: -25°C TO 85°C.
    - 3-2 STORAGE TEMP.: -40°C TO 85°C.
  - QUANTITY OF PRODUCTS: 1000PCS/REEL MIN.
  - PLEASE CONTACT SALES TO VERIFY PRODUCT DETAILS.
  - PART No.:

S 1 SP - 13 00 06 - 18 G


SIM SERIES:   
 1=WITH POST   
 PIN PUSH Type:   
 13:HEIGHT 1.35mm   
 00=NORMAL TYPE

G=gold flash   
 18=Product Order Pin No. 06=6Pin   
 00=NORMAL TYPE

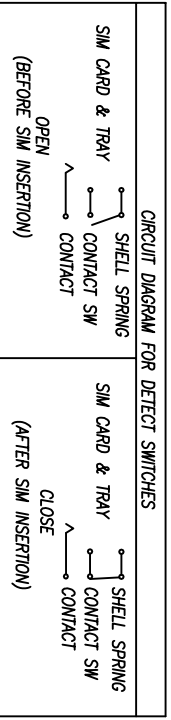

SW	DETECT SWITCH
C7	I/O
C6	Vpp
C5	GND
C3	CLK
C2	RST
C1	Vcc
	PIN DEFINE

Recommended PCB Layout  
 (General tolerance: ±0.05)



NO.	DESCRIPTION	QTY	MATERIAL	NOTE
⑤	LEVER	1	STAINLESS STEEL	NO PLATING
④	CAM	1	STAINLESS STEEL	NO PLATING
③	TERMINAL	6	COPPER ALLOY	CONTACT 150" Au OVER ALL.
②	SHELL	1	STAINLESS STEEL	N/Au PLATING
①	BODY HOUSING	1	THERMOPLASTIC	UL 94V-0

深圳市顺宏康科技有限公司

TITLE	Micro SIM Card(pin push) 6pin 1.5H CONN. (SMT)
DWV	JOHNSLE PART NO. SHK-10364
CHKD	KENJUD SCALE:1:1 UNIT: mm
APVD	SIMONJM SIZE: A4 SHEET:10F 1 REV: A

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
△A	PROPOSE ONLY	SIMON	2015.04.09

CUSTOMER COPY