


NOTE:

- MATERIAL:  
HOUSING: THERMOPLASTIC, BLACK, UL 94V-0  
CONTACT: COPPER ALLOY.  
SHELL: STAINLESS STEEL.
- FINISH:  
CONTACT: GOLD PLATING 1u"Min., SOLDER AREA 100u" TIN PLATED OVER NICKEL
- SPECIFICATION:  
CONTACT RESISTANCE: 80mΩ MAX.  
INSULATION RESISTANCE: 1000MΩ MIN.  
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN FOR 1 MINUTE.  
DURABILITY: 5000 CYCLES.
- PART No.:

SIM CON. | S | 0 DL - 28 | 00 12- 10 G

G=gold flash  
0=WITHOUT POST  
DL=DUAL TYPE.  
28:HEIGHT 2.8mm


10=Product Order Pin NO. 12=12Pin  
00=ON PCB

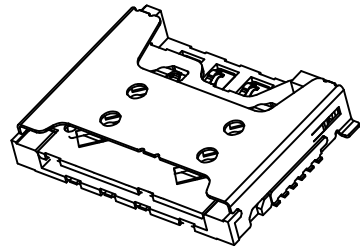

SIM CARD PIN NO.	PIN NO.
P1-A/B	VCC
P2-A/B	RST
P3-A/B	CLK
P5-A/B	GND
P6-A/B	VPP
P7-A/B	I/O

REV.	ECN NO OR DESCRIPTION	REVISED	DATE
▽	PROPOSE ONLY	ALLEN	2015.03.28

PATTERN PROHIBITION AREA

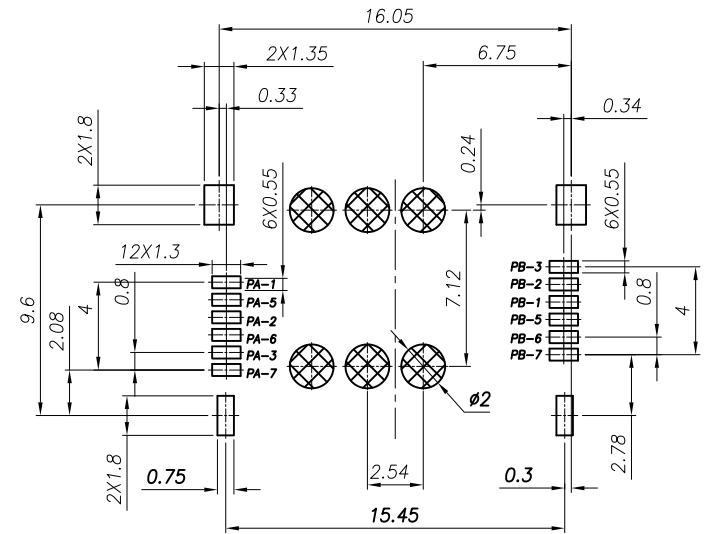

RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES: ±0.05



③	TERMINAL	12	C5210-EH, T=0.12	Au 5u" PLATING
②	BASE INSULATOR	1	LCP+GF30%	BLACK
①	SHELL	1	SUS304-H, T=0.15	AU/Ni PLATING
NO.	PART NAME	Q'TY	DESCRIPTION	NOTE

UNLESS OTHERWISE SPECIFIED TOLERANCES		深圳市顺宏康科技有限公司			
DECIMALS:	ANGLES:	TITLE	DUAL Micro SIM 2 in 1 Card Conn.		
x :±0.5	X :±2°	DWN	ALLEN	PART NO.	SHK-10391
X.X :±0.20	X.X :±1°	CHKD	KEVIN	SCALE:1:1	UNIT: mm
X.XX :±0.10		APVD	ERIC.W	SIZE: A3	SHEET:10F 1
		REV: A			
CUSTOMER COPY					