
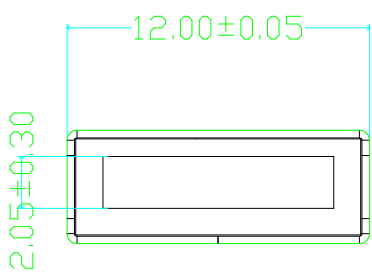
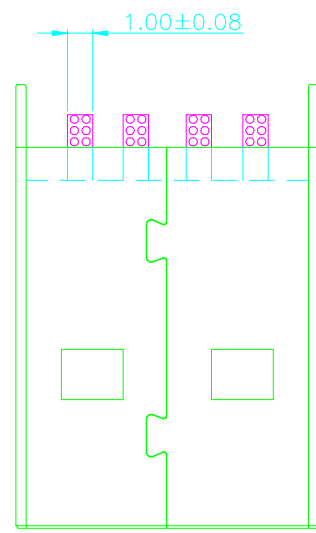
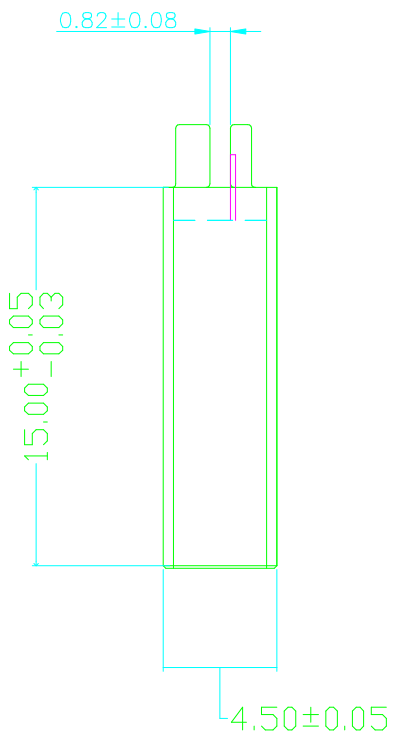


REV	LTR	DESCRIPTION	DATE	REVISER	APPD

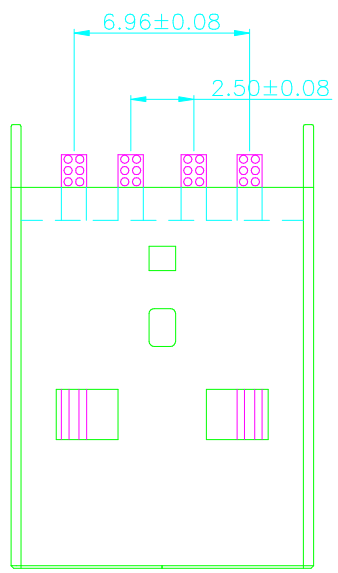

特性: Specificationg:
电器: Electrical:
 接触阻抗: Contact Resistance:
 30 milliohms MAX
 耐电压: Dielectric Withstanding Voltage:
 100V AC AT Sea Level
 绝缘阻抗: Insulation Resistance:
 110 MEGA ohms MIN

材料: Matorial:
 塑胶: Housing Hing Temperature Thermoplastics
 PBT UL 94V-0塑胶
 端子: Contact: C2680 (H65) 黄铜 T=0.2mm
 外铁壳: Shell:SPCC 铁 T=0.3mm
 端子: Contact:Plated Gold in Mating Area,
 Tin On solder Talls
 接触点镀金1U", 焊锡脚镀锡100-120U".
 盐雾测试过24小时.

X.	±0.15	X.	±0.5°	
.X	±0.10	.X	±0.5°	
.XX	±0.03	.XX	±0.5°	
.XXX	±0.01	.XXX	±0.5°	
THESE DRAWINGS AND SPECIFICATION ARE THE PROPERTY OF SKY HAWK COMPUTER GROUP. AND SHALL NOT BE COPYIED OR USED IN ANY MANNER WITHOUT THE PRIOR CONSENT.				厚度: 数量:



深圳市顺宏康科技有限公司

产品名称: SHK-20399		USB A2.0公短体夹板式	
核准:	日期: 2015.11.1	图号	
审核:	日期:	版次 A	
绘图:	日期:	比例 1/1	张数: 1