

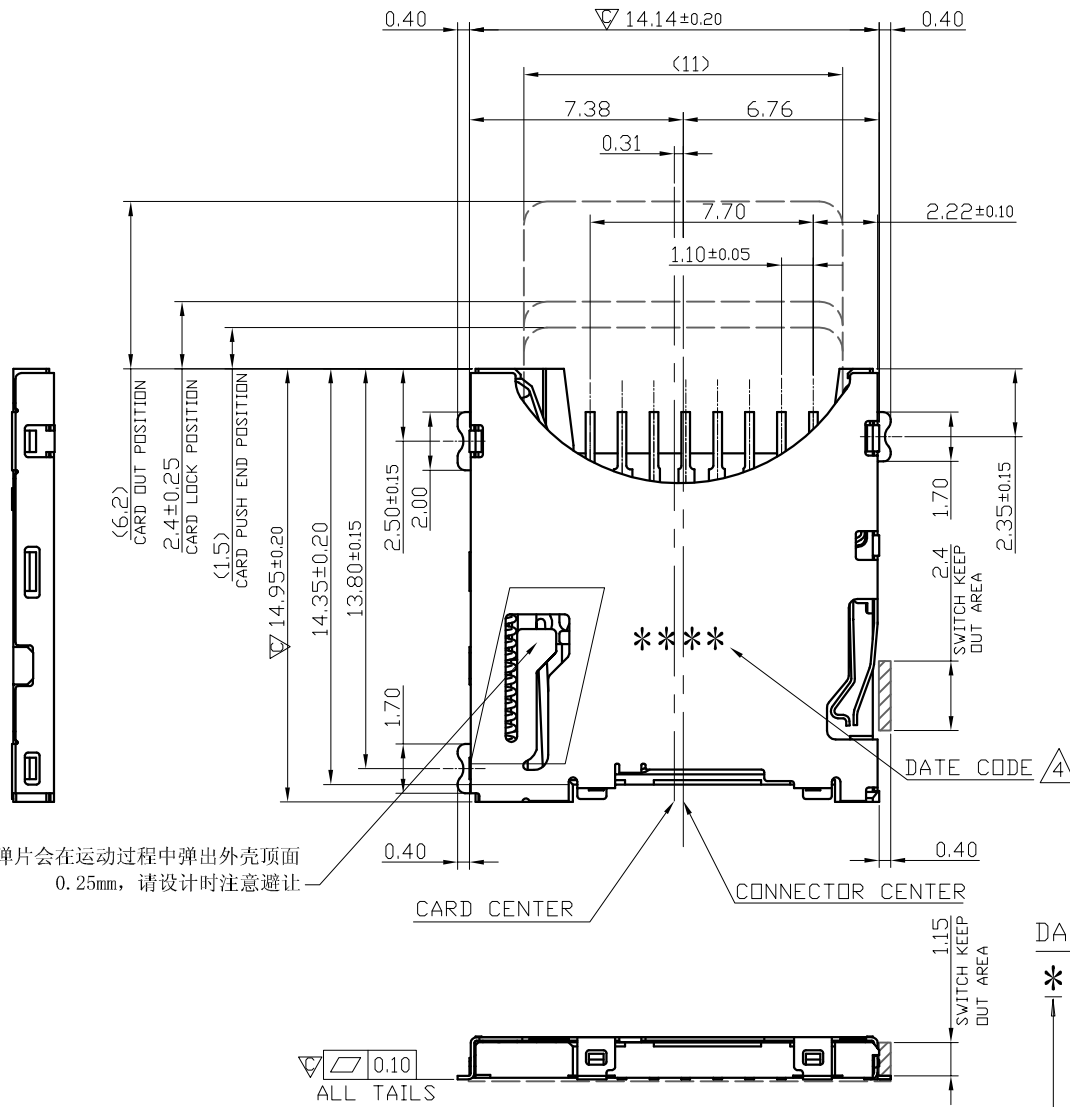


REV.	ECN NO OR DESCRIPTION	REVISED	DATE
▽	PROPOSE ONLY	ALLEN	2010.11.08

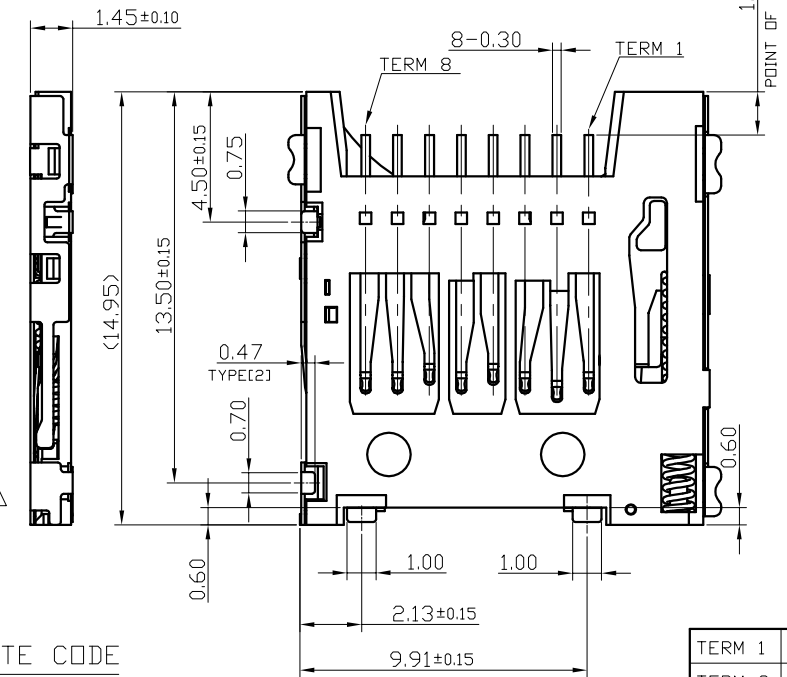


此弹片会在运动过程中弹出外壳顶面 0.25mm, 请设计时注意避让



DATE CODE

 PRODUCT LINE TYPE (EX. A/a,B/b...)
 DAY (EX. A,B...)
 MONTH (EX. A,B...)
 YEAR (EX. A,B...)

TERM 1	DATA 2
TERM 2	CD/DATA 3
TERM 3	CMD
TERM 4	VDD
TERM 5	CLK
TERM 6	VSS
TERM 7	DATA 0
TERM 8	DATA 1

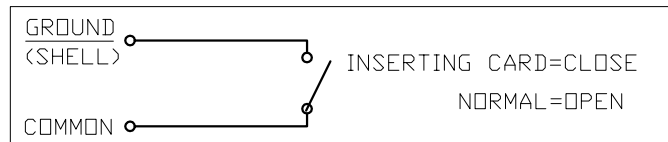


UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X ±0.5	X ±2°
X.X ±0.20	X.X ±1°
X.XX ±0.10	

深圳市顺宏康科技有限公司

TITLE	1.45mm Push Push Micro SD CARD CONN.		
DWN	ALLEN	PART NO. TOPP-150108-04G	
CHKD	KEVIN	SCALE:1:1	UNIT: mm
APVD	ERIC.W	SIZE: A3	SHEET:1OF 1
REV: A1			

CUSTOMER COPY

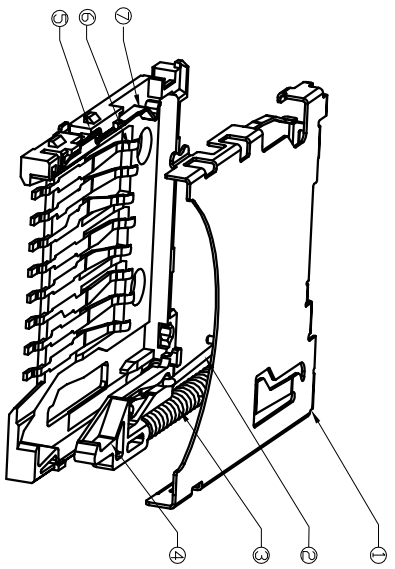

PROHIBITED AREA
 PATTERN PROHIBITED AREA
 SOLDERPROHIBITED AREA

- NOTES:
1. COPPLANARTY SPEC. FOR ALL SOLDER TAILS AND SOLDER PADS IS 0.1mm MAX.
 2. ELECTRICAL CHARACTERISTICS:
 - 2-1. CURRENT RATING: 0.5 Amp. MAX.
 - 2-2. VOLTAGE: 100V DC. MAX.
 - 2-3. LDW LEVEL CONTACT RESISTANCE: 100 mOhms MAX. INITIALLY.
 - 2-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
 - 2-5. INSULATION RESISTANCE: (INITIAL) 1000MOhms MIN., (FINAL) 100MOhms MIN.


BY APPLYING 500V DC ON MATED AND UNMATED CONNECTORS THROUGH MIL-STD-202, METHOD 302.

3. MECHANICAL CHARACTERISTICS:
 - 3-1. DURABILITY: 5000 CYCLES.
 - 3-2. OPERATING TEMP. RANGE: -25°C TO 85°C. [INCLUDING TERMINAL TEMP. RISE]
 - 3-3. STORAGE TEMP.: -40°C TO 85°C.

4. DATE CODE TO BE PRINTED ON SHELL.
5. DIMENSIONS MARKED ∇ ARE MAJOR CHECKED DIMENSIONS.
6. HARMFUL MATERIAL CONTROL PLEASE FOLLOW DDC. NO. "EPI12".
7. QUANTITY OF PRODUCTS: 1400PCS/REEL
8. PART No.:

T 0 PP - 15 01 08 - 04 G

T-FLASH
 0=WITHOUT POST
 PP= PUSH Type
 15=HEIGHT 145mm
 G=gold flash
 04=Product Order
 Pin NO. 8=8Pin
 01=NORMAL TYPE.

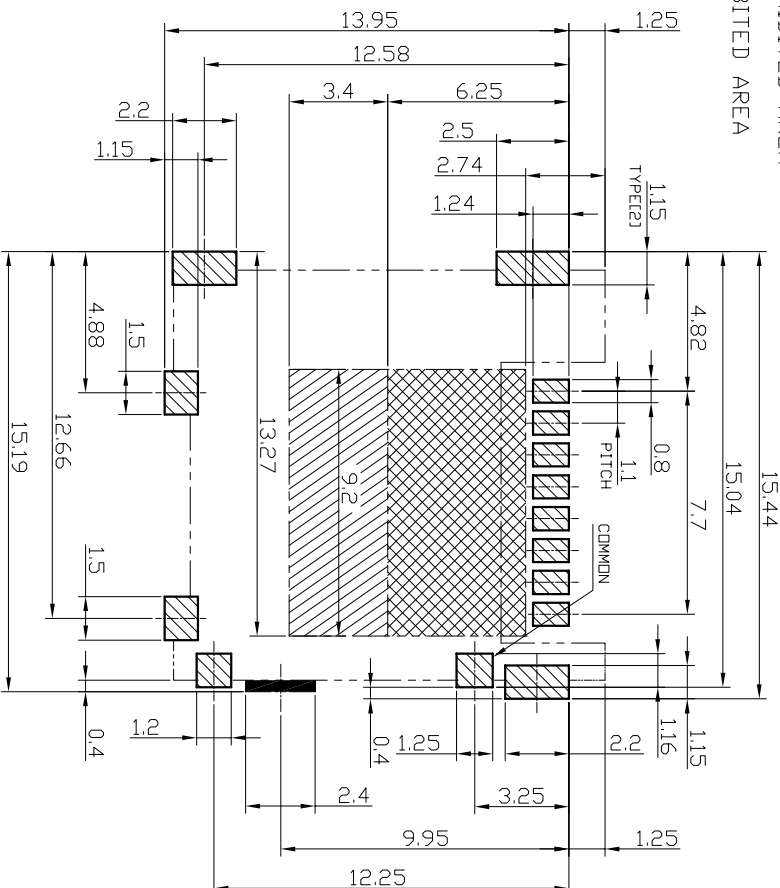

NO.	PART NAME	QTY	DESCRIPTION
1	SHELL	1	Ni PLATING
2	CAM FOLLOWER	1	SUS
3	SPRING	1	SUS
4	SLIDER	1	THERMAL PLASTIC
5	HOUSING	1	THERMAL PLASTIC
6	TERMINAL	1	COPPER ALLOY GOLD PLATING
7	COMMON	1	COPPER ALLOY GOLD PLATING

DECIMALS:	ANGLES:	TITLE	SCALE:1:1	UNIT: mm	REV: A1
X ±0.5	X ±2°	145mm Push Micro SD CARD CONN.	PART NO. TOPP-150108-04G		
X.X ±0.20	X.X ±1°				
X.XX ±0.10					

深圳市顺宏康科技有限公司



CUSTOMER COPY