
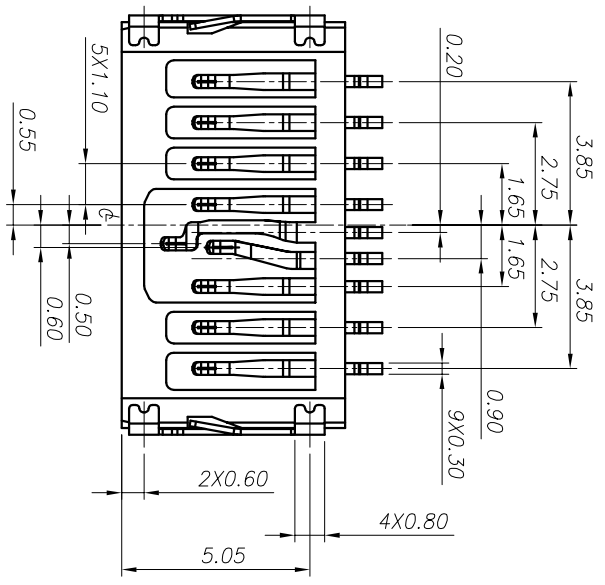
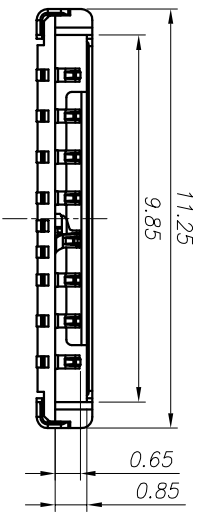


REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
1	PROPOSE ONLY	ALLEN	2014.09.18



- NOTES:
1. COPPLANARY SPEC. FOR ALL SOLDER TAILS AND SOLDER PADS IS 0.1mm MAX.
  2. ELECTRICAL CHARACTERISTICS:
    - 2-1. CURRENT RATING: 0.5 Amp. MAX.
    - 2-2. VOLTAGE: 100V DC. MAX.
    - 2-3. LOW LEVEL CONTACT RESISTANCE: 100 mOhms MAX. INITIALLY.
    - 2-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
  3. MECHANICAL CHARACTERISTICS:
    - 3-1. DURABILITY: 3000 CYCLES.
    - 3-2. OPERATING TEMP. RANGE: -25°C TO 85°C. [INCLUDING TERMINAL TEMP. RISE]
    - 3-3. STORAGE TEMP.: -40°C TO 85°C.

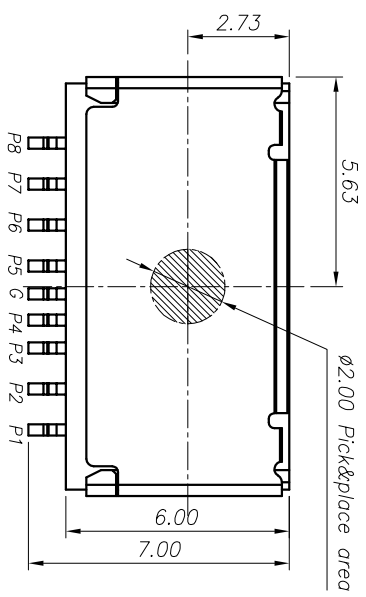

PART No.:

T 0 SP - 13 01 08- 02 G

- T-Flash CON.
- 0=WITHOUT POST
- SP=SIMPLE TYPE.
- 13=HEIGHT 1.3mm
- G=Gold Flash
- 02=Product Order Pin NO. 8=8Pin
- 01=NORMAL TYPE.(ON PCB)

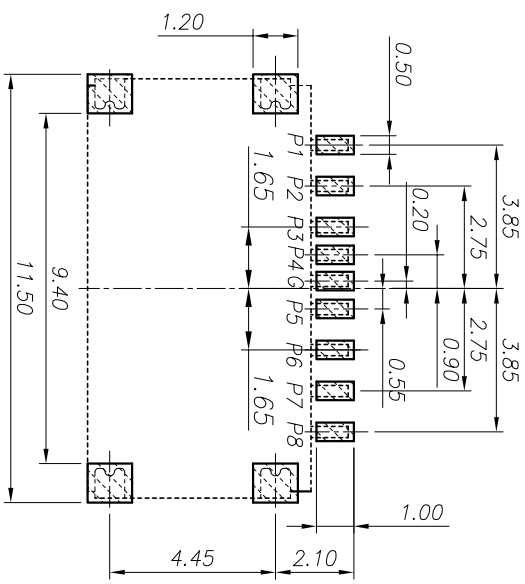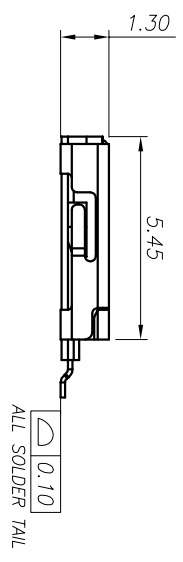



RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05

PIN ASSIGNMENT

PIN NUMBER	PIN NAME
6	SWTCH
PIN 8	DAT1
PIN 7	DAT0
PIN 6	VSS
PIN 5	CLK
PIN 4	VDD
PIN 3	CMD
PIN 2	CD/DAT3
PIN 1	DAT2

-0.02 (USL)  
-0.10 (LSL)  
SMT SIDE

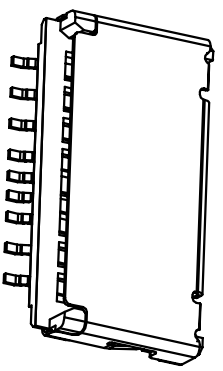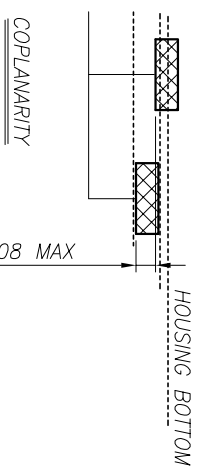

NO.	DESCRIPTION	QTY	MATERIAL
3	TERMINAL	8	COPPER ALLOY
2	SHELL	1	STAINLESS STEEL
1	HOUSING	1	THERMOPLASTIC

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X :±0.5 X :±2°

X.X :±0.20 X.X :±1'

X.XX :±0.10

深圳市顺宏康科技有限公司

1.3H T-FLASH CARD CONN (HEAD0F)

TITLE	1.3H T-FLASH CARD CONN (HEAD0F)
DMW	ALLEN
CHKD	KEVIN
APVD	ERIC.W
PART. NO.	TOSP-130108-02G
SCALE:1:1	UNIT: mm
SIZE: A3	SHEET:1 OF 1
REV: A1	

CUSTOMER COPY