
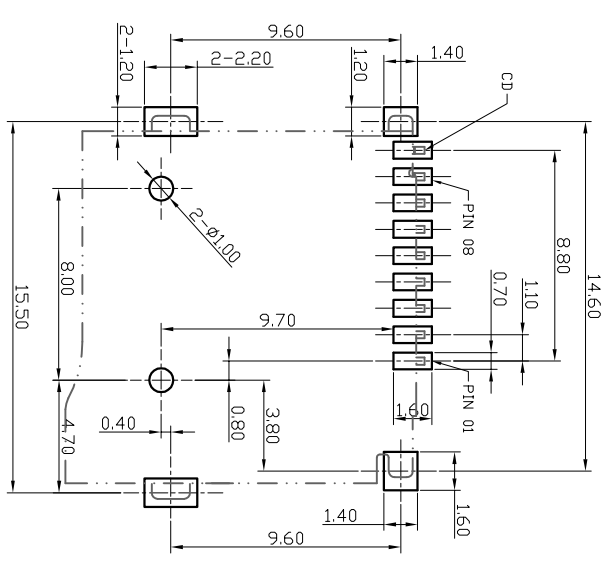
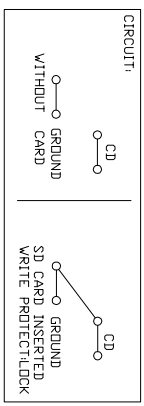
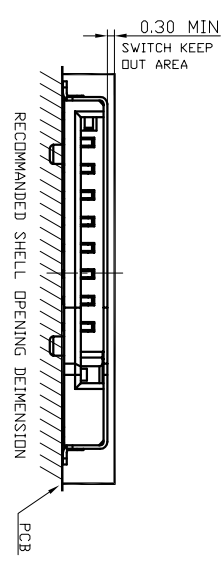


TERM 1	DATA 2
TERM 2	CD/DATA 3
TERM 3	CMD
TERM 4	VDD
TERM 5	CLK
TERM 6	VSS
TERM 7	DATA 0
TERM 8	DATA 1

- NOTES:
1. COPPLANARY SPEC. FOR ALL SOLDER TAILS AND SOLDER PADS IS 0.1mm MAX.
 2. ELECTRICAL CHARACTERISTICS:
 - 2-1. CURRENT RATING: 0.5 Amp. MAX.
 - 2-2. VOLTAGE: 100V DC. MAX.
 - 2-3. LOW LEVEL CONTACT RESISTANCE: 100 mOhms MAX. INITIALLY.
 - 2-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
 - 2-5. INSULATION RESISTANCE: (INITIAL) 1000MOhms MIN. (FINAL) 100MOhms MIN.
 3. MECHANICAL CHARACTERISTICS:
 - 3-1. DURABILITY: 5000 CYCLES.
 - 3-2. OPERATING TEMP. RANGE: -25°C TO 85°C. (INCLUDING TERMINAL TEMP. RISE)
 - 3-3. STORAGE TEMP.: -40°C TO 85°C.
 4. DIMENSIONS MARKED ∇ ARE MAJOR CHECKED DIMENSIONS.
 5. HARMFUL MATERIAL CONTROL PLEASE FOLLOW DDC. NO. *EP112*.
 6. QUANTITY OF PRODUCTS: 1400PCS/REEL
 7. PART No:
 - T-1 PB - 19 01 08 - 05 G
 - T-FLASH
 - I=WITH POST
 - P=WITH POST
 - 05=Product Droker
 - Pin No. 8-8Pin
 - 01=NORMAL TYPE
 - 19=HEIGHT 1.90mm

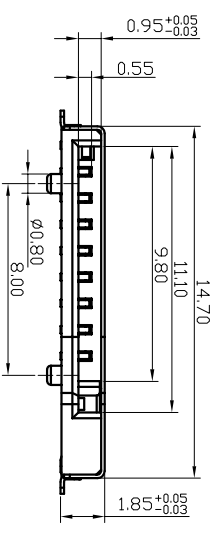

7	SWITCH PIN	1	COPPER ALLOY	GOLD PLATING
6	TERMINAL	8	COPPER ALLOY	GOLD PLATING
5	HOUSING	1	THERMAL PLASTIC	
4	SLIDER	1	THERMAL PLASTIC	
3	SPRING	1	SUS	
2	CAM FOLLOWER	1	SUS	
1	SHELL	1	SUS	
NO.	PART NAME	Q'TY	DESCRIPTION	

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X ±0.5	X ±2°
X.X ±0.20	X.X ±1°
X.XX ±0.10	

TITLE: 190mm Push Micro SD CARD CONN
 DWG: ALLEN
 PART NO.: T1PP-190108-05G
 CHKD: KEVIN
 SCALE: 1:1
 UNIT: mm
 APVD: ERIC.W
 SIZE: A3
 SHEET: 1 OF 1
 REV: A2

ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

ALL DIMENSIONS IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

深圳市顺宏康科技有限公司