
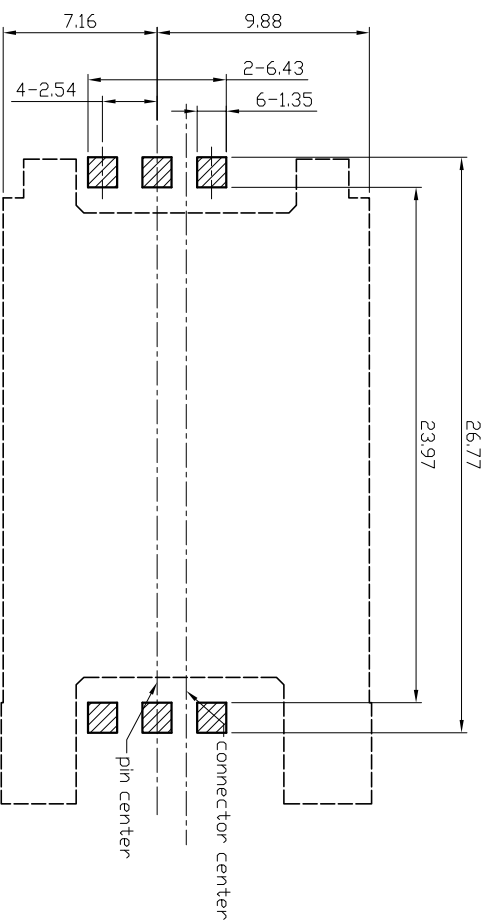



REV:	ECN NO OR DESCRIPTION	REVISED	DATE
PROPOSE ONLY		SIMDN	07-03-12

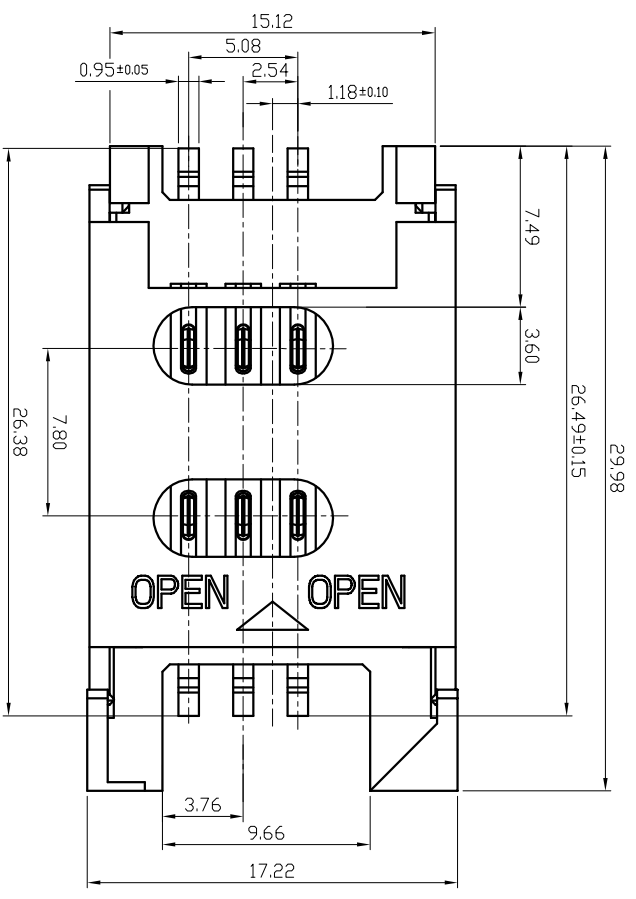

RECOMMENDED PC BOARD LAYOUT  
TOLERANCE: ±0.05(TOP VIEW)

3	TERMINAL	6	COPPER ALLOY	SEE NOTE
2	Cover	1	THERMOPLASTIC	UL 94V-0
1	HOUSING	1	THERMOPLASTIC	UL 94V-0
ND.	DESCRIPTION	QTY	MATERIAL	NOTE

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:

X	±0.5	X	±2°
X.X	±0.20	X.X	±1°
X.XX	±0.10		

TITLE: 6PIN 2SH HINGE SIM CARD CHAIN ASSEM.


DRAWN: JQH/LE PART NO: S00G-2500068-01G

CHKD: KEV/JND SCALE: 1:1 UNIT: mm

APVD: SIMDNM SIZE: A4 SHEET: 1 OF 1 REV: A2

深圳市顺宏康科技有限公司

CUSTOMER COPY



- NOTE:
- Material:
    - Housing: High Temperature Thermoplastic, Color: Black UL 94V-0
    - Contacts: Phosphor Bronze, Contact Area: Au15'', Solder Tail Plating: Sn
    - Cover: High Temperature Thermoplastic, Color: Black UL 94V-0
  - Specification:
    - 2-1 Current Rating: 0.5mA max.
    - 2-2 Contact Resistance: 30mΩ max
    - 2-3 Insulation Resistance: 1000MΩ min./500VDC
    - 2-4 Dielectric Withstanding Voltage: 500VAC/1minute
    - 2-5 Operating Temperature: -25°C to +85°C
    - 2-6 Mating Cycles: 3,000
  - Product Compliant to RoHS Directive 2002/95/EC and ELV 2000/53/EC

\* PART No.:

S 0 HG - 25 00 06 - 01 G

- SIM SERIES: 0=WITHOUT POST, 01=Product Order, 00=NORMAL TYPE.
- HINGE TYPE: 25=HEIGHT 2.5mm
- G=gold flash, Pin No. 06=6Pin