



CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 8P8C DIP型反口沉板H=4.10 带灯	MJ88H1-BX11-HLRVLX1-X


REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	————	New Release	YST	2025.10.24



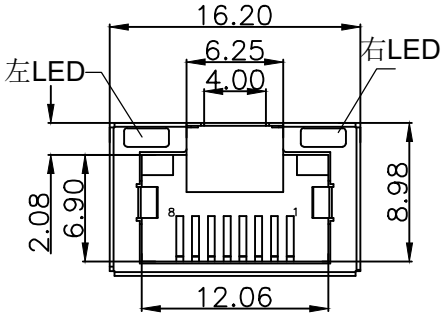


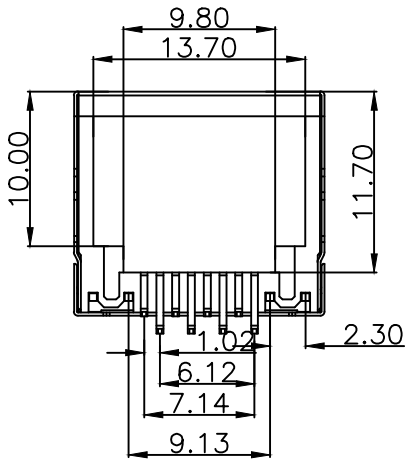

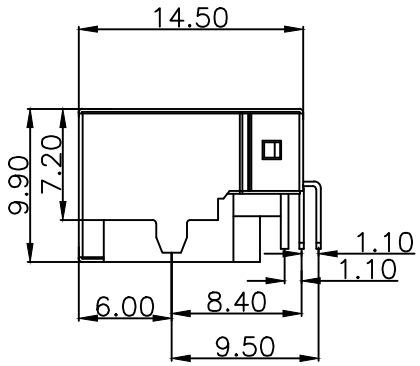



SPECIFICATION
1.CURRENT RATING: 1.5AMPS
2.VOLTAGE RATING: 125V AC
3.INSULATION RESISTANCE: 500MΩ MIN.
4.WITHSTAND VOLTAGE:
AC1000V RMS 50Hz or 60Hz MIN.
5.CONTACT RESISTANCE:30mΩ MAX.
6.DURABILITY: 750 MATING CYCLES
7.OPERATING TEMPERATURE:
−25℃～+80℃

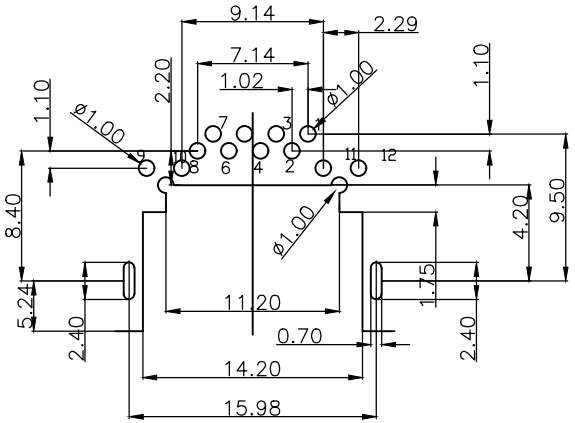

Recommend PCB Layout
Jack Top View
Tolerance: ±0.05mm

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
e	LED-R	1	SEE TABLE	Tin PLATING	
d	LED-L	1	SEE TABLE	Tin PLATING	
c	SHELL	1	SUS304	Ni PLATING	
b	TERMINAL	8	PHOSPHOR BRONZE	Au/Tin PLATING	
a	HOUSING	1	LCP+30%G.F UL94V-0	BLACK	

深圳市虹康科技有限公司
Shenzhen Hongkang Technology Co., Ltd

UNLESS OTHERWISE SPECIFED TOLERANCES	SCALE:1/1	UNIT: mm	RG45 H=9.9MM 沉板7.2MM
	SIZE: A3	PAGE:1 OF 1	REV:A01
DECIMALS: ANGLES: X.X :±0.30 X :±2° X.XX :±0.20 X.X :±1° X.XXX :±0.10	APPROVED BY	CHECKED BY	PREPARED BY
	DICK	XSY	YST
	CUSTOMER COPY	FILE NO.	0961.RJ45.Z9.HK