
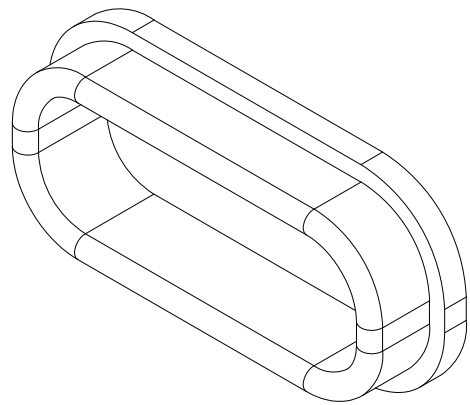
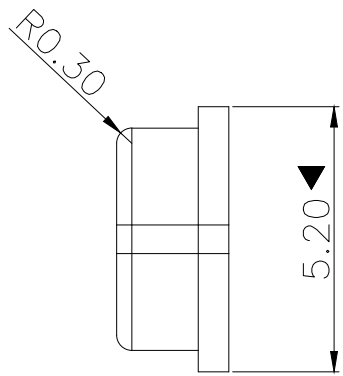
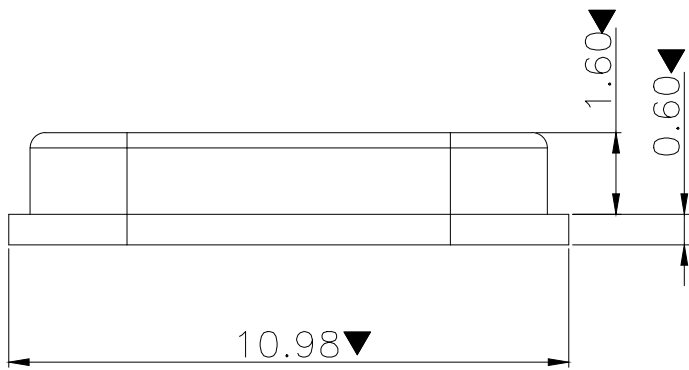
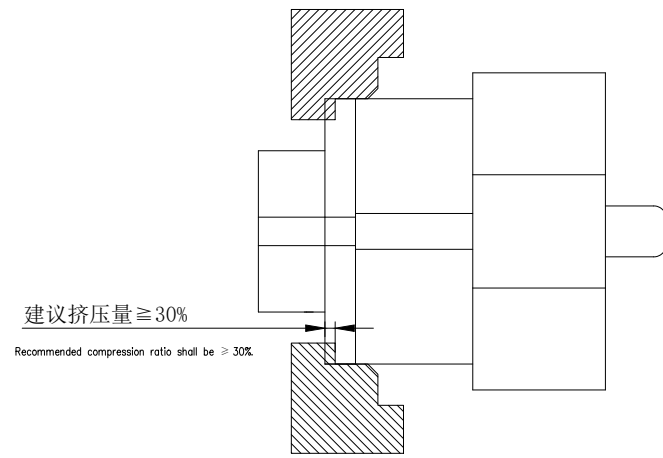
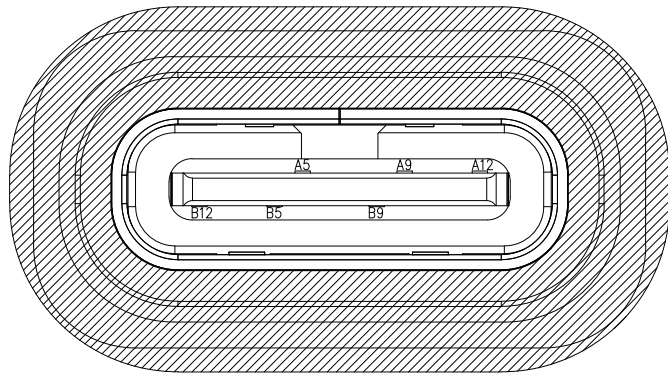


RoHS Compliant

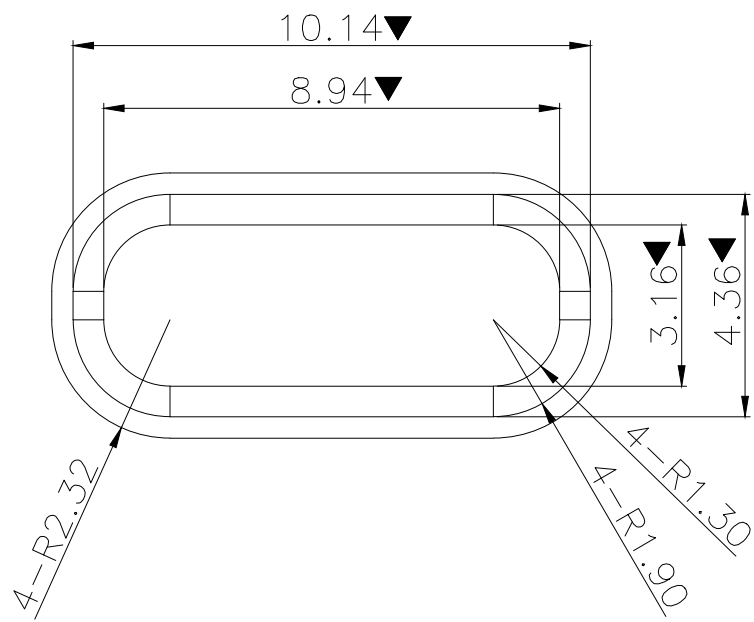


RECOMMENDED SCHEMATIC DRAWING OF CONNECTOR MATCH CHASSIS

备注 (NOTE)

1. 材质: 硅橡胶 SI 60A, 黑色无卤, 材料要求耐高温 270°
Material: Silicone SI 60A, Black Halogen-Free, Material heat resistance: 270°
2. 品质要求事项: Quality Requirements:
 - 2-1. 不可缺胶, 变形, 毛边, 脏污.
No short shot, deformation, flash or contamination allowed.
 - 2-2. 产品表面不能刮伤, 划伤压痕.
No scratch, scuff or indentation on product surface.

MEASURE POINT: QUADRANT POINT (Q) TANGENCY POINT (T) INTERSECTION POINT (I)		鸿康科技（东莞）有限公司 Hongkang Technology (Dongguan) Co., Ltd				
UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.15 X.x ±0.10 X.xx ±0.05 X.xxx ±0.03 ANGLES ±2°		DESIGN: Gu Yi Fei		DATE: 2023.09.18		TITLE: TYPE-C 6PIN立插防水
		APPRO:		DATE:		
		REV.: X1	SCALE: 1:1	UNIT: mm		
		SIZE: A4	SHEET: 1/1			PART NO.: 0515.WPCF.Y2.HK
This document is exclusively owned by Hongkang Electronic Technology Company and shall not be used, in whole or in part, without prior written permission. Email:hkconn@163.com						

RoHS Compliant

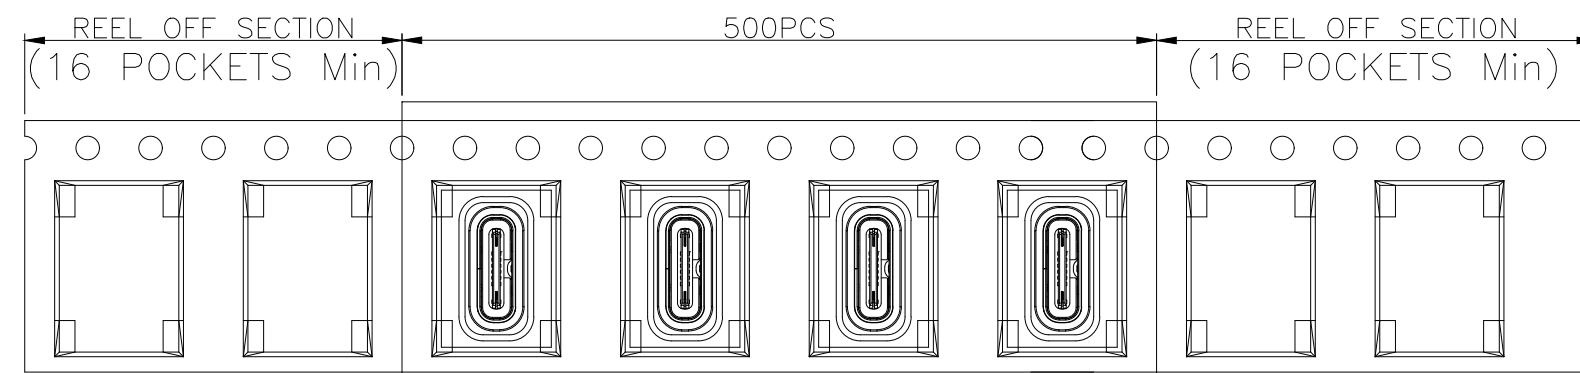


SEE DETAIL

PEELING
DIRECTION

165°~180°
PEELING
ANGLE

PULL OUT DIRECTION

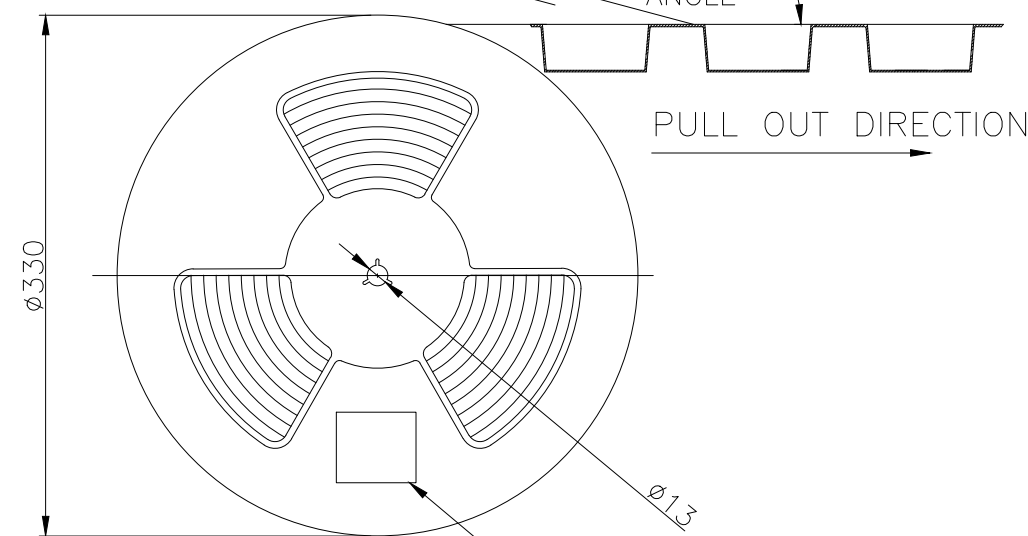



_____ LABEL


2.00
4.00
Ø 1.50

REEL OFF
DIRECTION

12.00

PULL OUT
DIRECTION

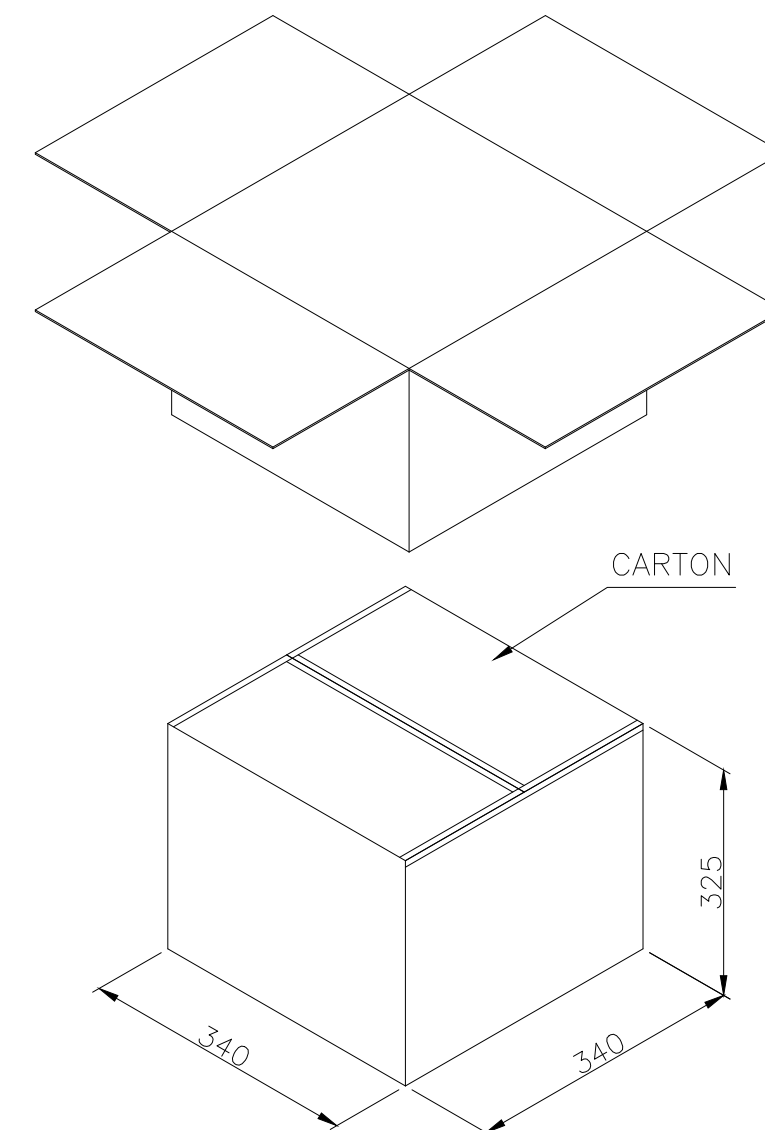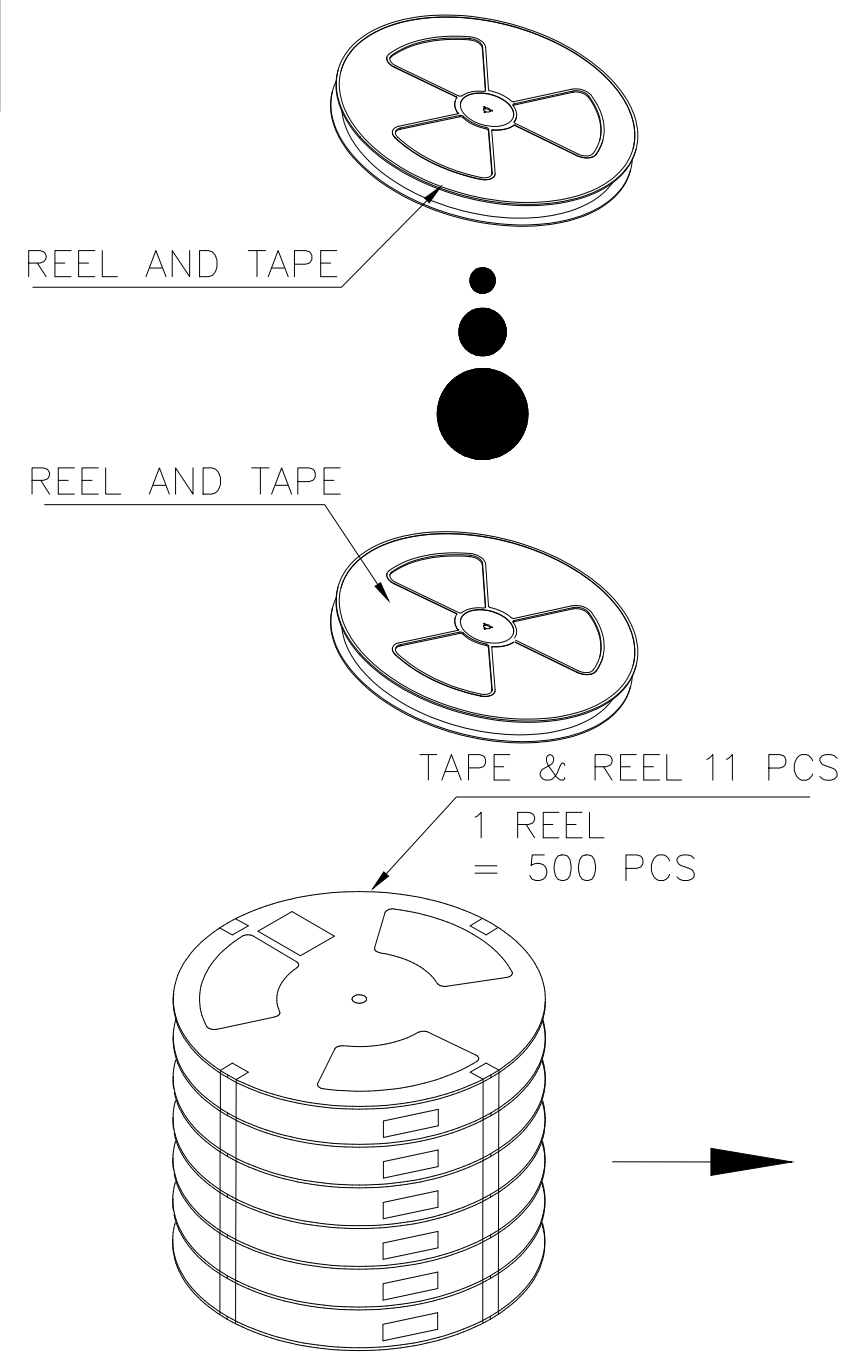

MEASURE POINT: QUADRANT POINT (QP) TANGENCY POINT (TP) INTERSECTION POINT (IP)	鸿康科技（东莞）有限公司 Hongkang Technology (Dongguan) Co., Ltd				
UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.15 X.x ±0.10 X.xx ±0.05 X.xxx ±0.03 ANGLES ±2°	DESIGN: Gu Yi Fei		DATE: 2023.09.18		TITLE:
	APPRO:		DATE:		TYPE-C 6PIN立插防水
	REV.: X1	SCALE: 1:1	UNIT: mm		
	SIZE: A4	SHEET: 1/1		PART NO.: 0515.WPCF.Y2.HK	
	This document is exclusively owned by Hongkang Electronic Technology Company and shall not be used, in whole or in part, without prior written permission. Email:hkconn@163.com				