




REV.	DESCRIPTION	DRAWN/DATE	APPROVED/DATE

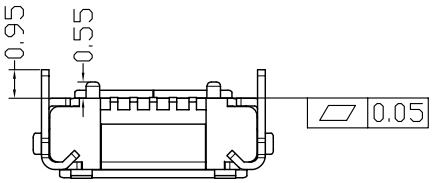






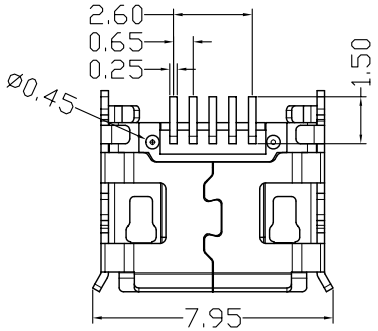

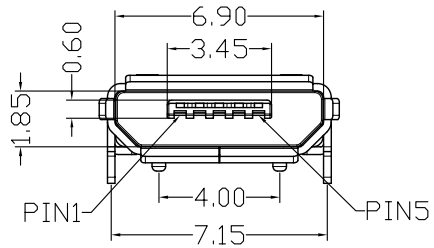

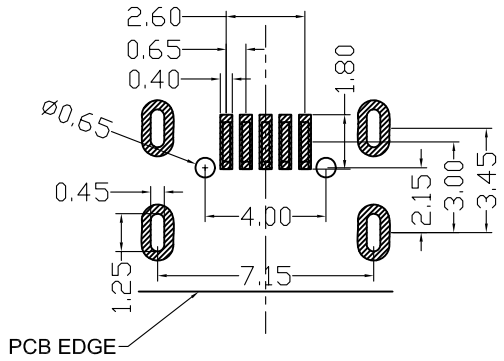

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

NOTES:

1. MATERIAL:
   - 1.1 HOUSING:THERMOPLASTIC FLAMMABILITY RATING UL94-O
   - 1.2 CONTACT:COPPERY ALLOY T=0.15MM
   - 1.3 SHELL: COPPERY ALLOY T=0.25MM
2. FINISH:
   - 2.1 CONTACT:
     1U"MIN,PLATED ON CONTACT AREA
     G/F PLATING ON SOLDER TAIL AREA
     50~80U" NICKEL UNDERPLATING OVERALL
   - 2.2 SHELL:
     80~120U" MATTER TIN PLAING ALL
     50~80U" NICKEL UNDERPLATING OVERALL
3. SPECIFICATION:
   - 3.3 CURRENT RATING:0.5A(2.3.4CONTACT)/1.8A (1.5CONTACT)MAX.
   - 3.2 VOLTAGE:30 VAC
   - 3.3 TEMPERATURE RANGE:-30°C~85°C
   - 3.4 CONTACT RESISTANCE:30 MILLIONHM MAX.
   - 3.5 DIELECTRIC WITHSTANDING VOLTAGE;250VAC R.M.S
   - 3.6 INSULATION RESISTNACE:100 MEGOHMS MIN

GENERAL TOLERANCE		ANGLE TOLERANCE		DESIGN	DATE
X.	±0.35	X°.	±2.0°	ZQL	2016/04/15
.X	±0.25	.X°	±1.0°	CHECK	DATE
.XX	±0.15	.XX°	±0.5°		
.XXX	±0.10				
UNIT:mm		SCALE	1:1	APPRO.	DATE
A4		SHEET: 1 of 1			

深圳市虹康科技有限公司

FILE NAME (品名)	MICRO 5P 四脚插卷边
PART NO (料号)	0812.M2F.BS.S9
DRAWING NO.(图号)	REV. A0