REV	DESCRIPTION	DATE	CHECK	APPROVAL
A0	NEW RELEASE	2024/01/19	MA	PENG


Specification:


1.Electrical Characteristics:
- Current rating: 1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- Dielectric withstanding voltage: 100 V(ac) for 1 min.
- Insulation Resistance: 100 MΩ Minimum.
- Contact Resistance: 30 mΩ Maximum.


2.Environmental:
- Operating Temperature:-30°C~+80°C.


3.Mechanical Characteristics:
- Total mating force: 3.57 Kgf Max.
- Total unmating force: 1.0 Kgf Min.


4.Material:
- Insulator: HI-Temp Plastic UL 94V-O Rated.
- Cantact: Copper Alloy(t=0.15mm).
- Shell: Copper Alloy(t=0.20mm)/spcc双光(t=0.25mm).

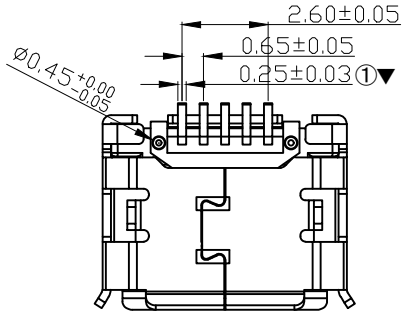


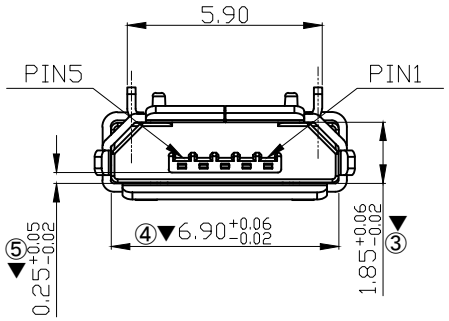


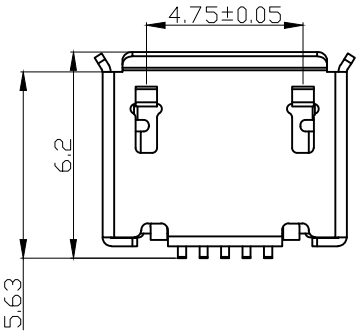

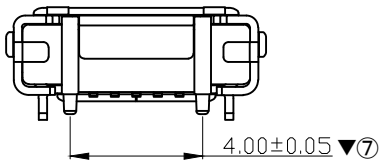

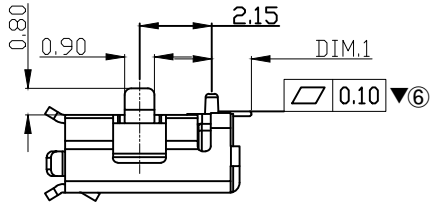



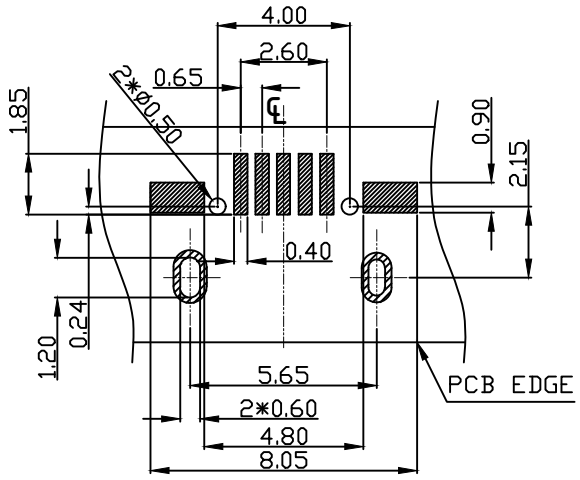

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

DIM.1		
	A	1.20
	B	1.00
	C	0.80

RoHS Compliant 2002/95/EC

GENERAL TOLERANCE
.X 0.30
.XX 0.20
.XXX 0.10

PROJECT

鸿康科技（东莞）有限公司
Hongkang Technology (Dongguan) Co., Ltd

APPROVAL	CHECK	DRAWN	DATE
PENG	MA	ZHANG	2024/01/19

PART NO.

TITLE.
MICRO USB 5P 5.9前插后贴脚5.9卷边有柱

UNIT	SCALE	NUMBER	REV
MM	1 : 1	A- 00	A0