
RoHS Compliant

MINI5P直脚

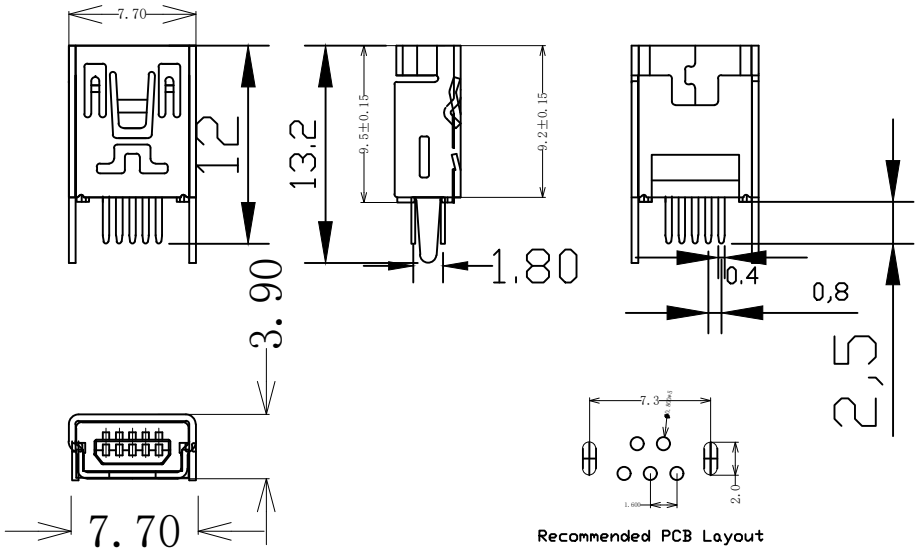

Recommended PCB Layout

特性：Specifications:
电器：Electrical:
接触阻抗：Contact Resistance
30 milliohms Max
耐电压：Dielectric Withstanding Voltage:
500V AC Sea Levol
绝缘阻抗：Insulation Resistance:
100 MEGA ohms MIN
材料：Matorial:
塑胶Housing:Hing Temperature Thermplastics.
LCP耐高温塑胶
端子：Contact: Copper Alloy铜合金
铜壳Shell:Copper Alloy 铜合金
电镀Finish:
端子Contact:Piated Gold In Mating Area:
Tin On Slder Talls
接触点镀金，脚镀锡
铜壳：Shell:
Nickel/Plating 镀镍

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:

X.	±0.15
X.x	±0.10
X.xx	±0.05
X.xxx	±0.03
ANGLES	±2°

鸿康科技（东莞）有限公司
Hongkang Technology (Dongguan) Co., Ltd

DESIGN: Gu Yi Fei	DATE: 2023.09.18	TITLE:	
APPRO:	DATE:	MINI USB5P180度直插直脚3.0端子	
REV.: X1	SCALE: 1:1	UNIT: mm	
SIZE: A4	SHEET: 1/1	PART NO.:	

This document is exclusively owned by Hongkang Electronic Technology Company and shall not be used, in whole or in part, without prior written permission. Email:hkconn@163.com