




RoHS Compliant



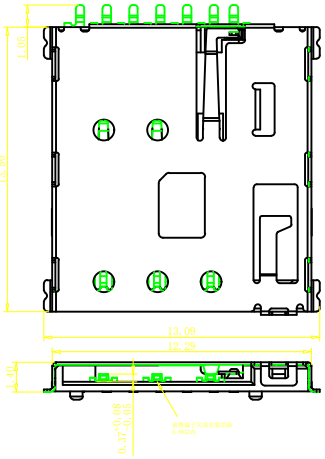





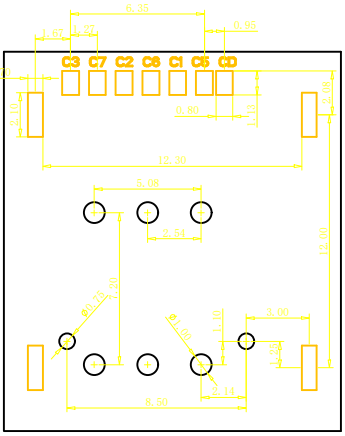


1)MATERIAL:
HOUSING:LCP S475 UL 94V-0
CONTACT:C5210R-H
SHELL:SUS304-H
2)FINISH:
CONTACT:GOLD FLASH PLATED ON CONTACT AREA;
GOLD FLASH PLATED ON SOLDER TAILS.
3)ELECTRICAL CHARACTERISTICS
RATING CURRENT : 0.5A MAX.
CONTACT RESISTANCE :50 mΩ MAX
DIELECTRIC WITHSTANDING : 500V AC MIN.
INSULATION RESISTANCE: 1000 MΩ MIN.
4)MECHANICAL CHARACTERISTICS
MATING CYCLE :3000 CYCLES

NOS11-S1F1-2000-A

1 有柱
2 无柱

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O



MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:

X.	±0.15
X.x	±0.10
X.xx	±0.05
X.xxx	±0.03
ANGLES	±2°

鸿康科技（东莞）有限公司
Hongkang Technology (Dongguan) Co., Ltd

DESIGN: Gu Yi Fei	DATE: 2023.09.18	TITLE: NANO SIM PUSN 卡座	
APPRO:	DATE:		
REV.: X1	SCALE: 1:1	UNIT: mm	
SIZE: A4	SHEET: 1/1	PART NO.:	JSX-TC24FA-2003

This document is exclusively owned by Hongkang Electronic Technology Company and shall not be used, in whole or in part, without prior written permission. Email:hkconn@163.com