
RoHS Compliant

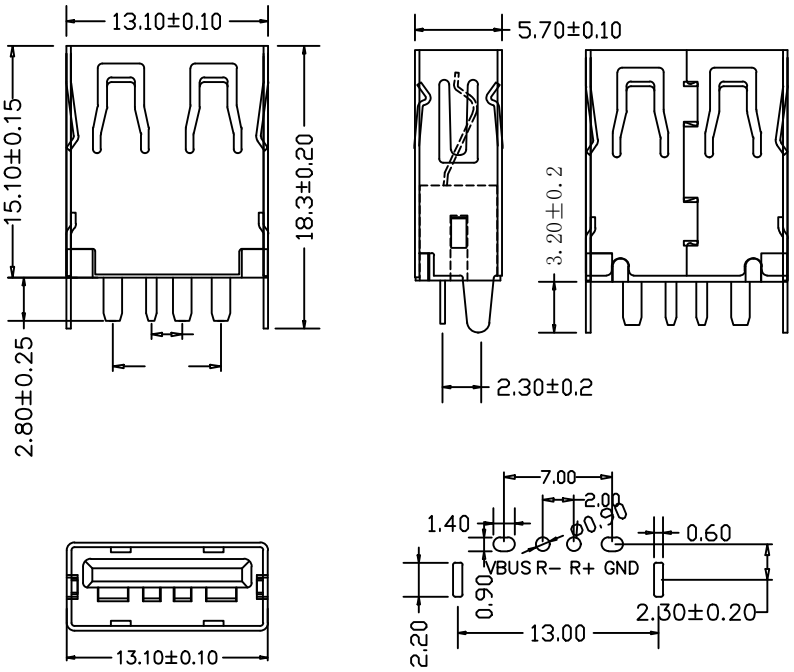

规格说明:Specifications:

电气特性:Electrical:

1.额定电流: Current Rating
3A/contact terminal

2.额定电压: Voltage Rating
30V DC

3.接触阻抗:Contact Resistance
30 milliohms MAX

4.耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Levol

5.绝缘阻抗:Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1.插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)

原材料:Matorial:

1.塑胶:Housing:
Hing Temperature Tnermaplastics,

2.端子:Contact:Copper Alloy C2680

3.外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1.端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls

端子四周镀30-50U"(MIN)镍,镀金区域镀金1U"

2.外壳:Shell:
铜一铁壳四周镀(MIN)镍50-80U"
Nickel Plating

MEASURE POINT: QUADRANT POINT QP, TANGENCY POINT TP, INTERSECTION POINT IP	鸿康科技（东莞）有限公司 Hongkang Technology (Dongguan) Co., Ltd			
UNLESS OTHERWISE SPECIFIED, TOLERANCE: X. ±0.15, X.x ±0.10, X.xx ±0.05, X.xxx ±0.03, ANGLES ±2°	DESIGN: Gu Yi Fei	DATE: 2023.09.18	TITLE: 15.0直边直脚	
	APPRO:	DATE:		
	REV.: X1	SCALE: 1:1	UNIT: mm	
	SIZE: A4	SHEET: 1/1		PART NO.:

This document is exclusively owned by Hongkang Electronic Technology Company and shall not be used, in whole or in part, without prior written permission. Email:hkconn@163.com