



RoHS Compliant

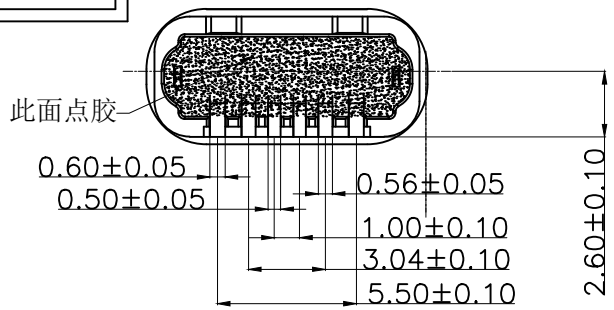





NOTES:
1. CURRENT RATING:
   3.0A MAX.
2. DIELECTRIC WITHSTAND VOLTAGE:
   100VAC.
3. TEMPERATURE RANGE:
   −30 °C ~ 85 °C.
4. CONTACT RESISTANCE:
   40 MILLIONHM MAX.
5. INSULATION RESISTANCE:
   100 MEGOHMS MIN.
6. INSERTION FORCE :
   5N~20N.
7. UNMATING FORCE:
   8N~20N.
8. DURABILITY:
   10,000 CYCLES.
9. WATERPROOF RATING: IPX7.
10. ALL PRODUCTS COMPLY WITH RoHS ENVIRONMENTAL REQUIREMENTS.

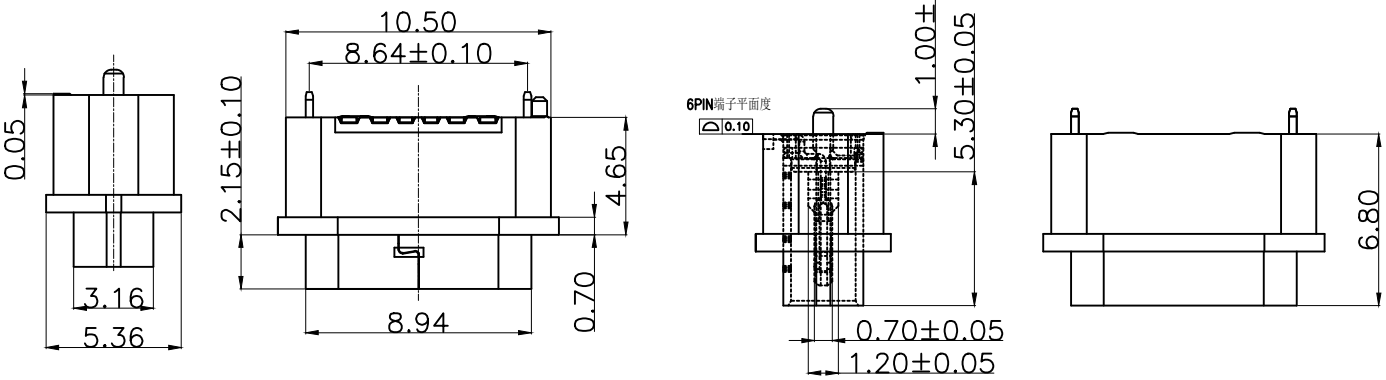

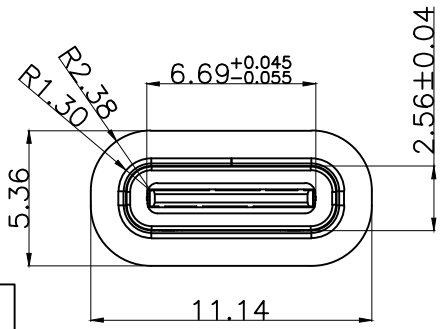

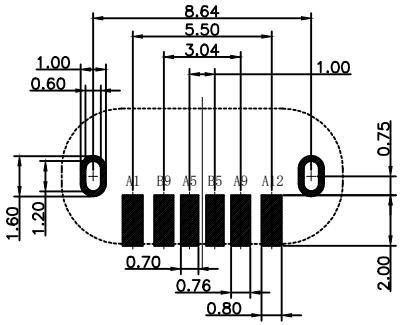


RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

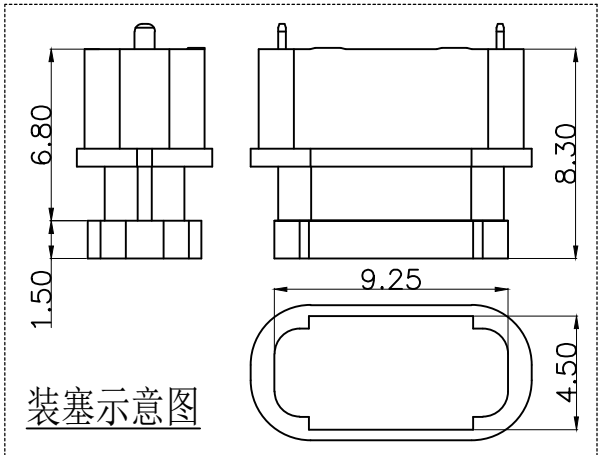


装塞示意图

防水圈: 建议防水圈尺寸

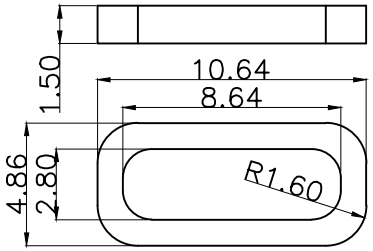

下压至0.80~1.00mm防水性能最佳



A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

MEASURE POINT:
QUADRANT POINT (QP)
TANGENCY POINT (TP)
INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.15
X.x ±0.10
X.xx ±0.05
X.xxx ±0.03
ANGLES ±2°

鸿康科技（东莞）有限公司
Hongkang Technology (Dongguan) Co., Ltd

DESIGN: Gu Yi Fei	DATE: 2023.09.18	TITLE:	
APPRO:	DATE:	TYPE C 6PIN 立贴 H=6.80 防水 外露2.15mm	
REV.: X1	SCALE: 1:1	UNIT: mm	
SIZE: A4	SHEET: 1/1	PART NO.:	

This document is exclusively owned by Hongkang Electronic Technology Company and shall not be used, in whole or in part, without prior written permission. Email:hkconn@163.com