


RoHS Compliant

REV	DESCRIPTION	DATE	CHECK	APPROVAL
A0	NEW RELEASE	2024/01/19	MA	PENG





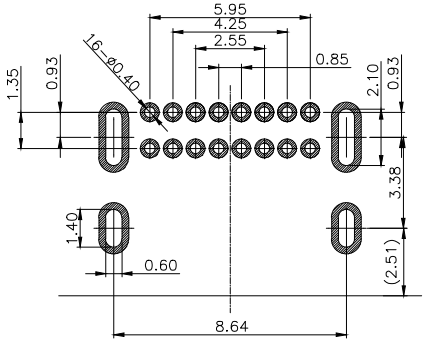



RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)


TOLERANCE FOR PCB LAYOUT IS ± 0.05

KEEP OUT AREA


NOTES:
1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT:COPPER ALLOY.
PLATED GOLD ON CANTACT AREA,
G/F GOLD ON SOLDER AREA,
50u" NICKEL PLATING OVER ALL.
SHELL: SUS304-H,T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
MIDDLE SHILD:SUS304-H,T=0.20±0.03mm
2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES
3.ELECTRICAL:
CURRENT: 5A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
4.ENVIRONMENTAL
TEMPERATURE RANGE -35°C ~ +85°C



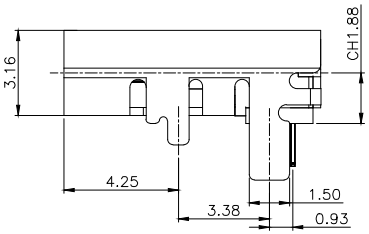

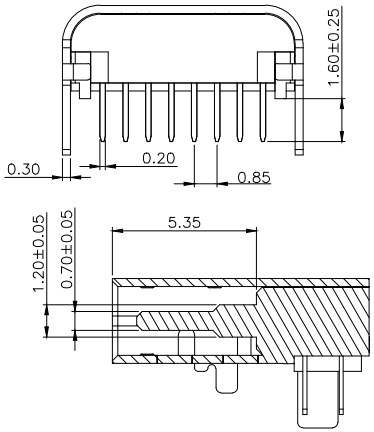

SECTION A-A

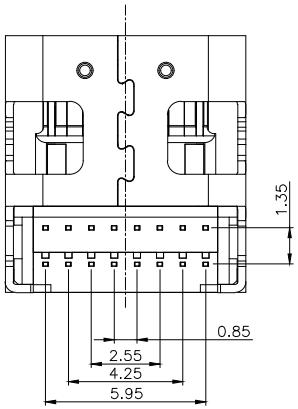

RoHS Compliant 2002/95/EC

This document is the exclusive property of Hongkang Electronic Technology Co., Ltd. and shall not be used, in whole or in part, without prior written permission.

GENERAL TOLERANCE	
.X	0.30
.XX	0.20
.XXX	0.10

PROJECT

鸿康科技（东莞）有限公司
Hongkang Technology (Dongguan) Co., Ltd

APPROVAL	CHECK	DRAWN	DATE
PENG	MA	ZHANG	2024/01/19

PART NO. UB177A-LBB10-RHA

TITLE. USB TYPE C 16PIN 双排DIP FEMALE TOP 9.60L CONNECTOR 脚长1.60

UNIT	SCALE	NUMBER	REV
MM	1 : 1	A-00	A0