


RoHS Compliant

REV	MODIFICATION	DRW	DATE
A	NEW	H.Q.Y	2015.06.01
B	图面整体	XDJ	2017.05.31
C	图面整理	HARRY	2018.11.06

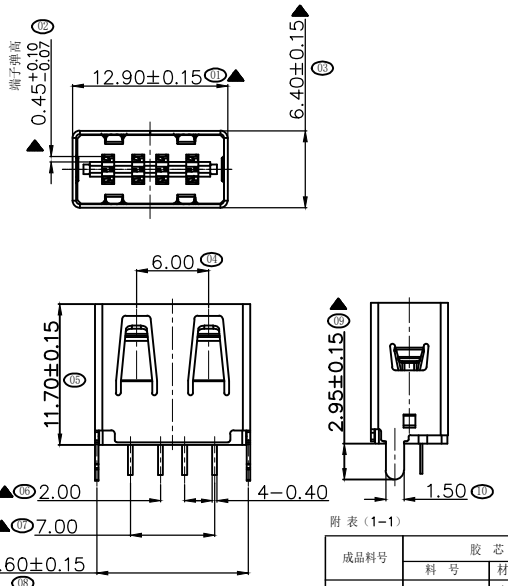

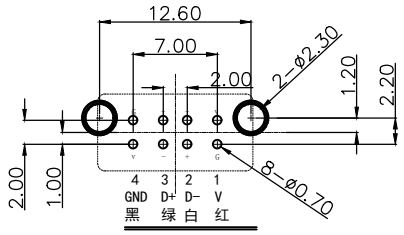



备注：

1.电气特性：

1-1额定电流：**1.5A/pin**

1-2接触阻抗：**30mΩ MAX.**

1-3耐电压：**500 V AC MIN.**

1-4绝缘阻抗：**1000 MΩ MIN.**

2.机械特性：

2-1 插入力：35 N(MAX.)

2-2 拔出力：5 N(min.)

3.寿命测试:1500次

5.″▲″表示重点尺寸

FAI全尺寸标示：″⑪″

6.所用材质需符合RoHS要求

附表（1-1）

成品料号	胶芯			端子			外壳		
	料号	材质	颜色	料号	材质	电镀	料号	材质	电镀
UB.2.F.001	03.01.06.019	LCP	白色	02.01.08.011	C5191	半金锡10″	02.02.04.014	SPCC	镀镍
UB.2.F.002	03.01.06.020	LCP	黑色	02.01.08.011	C5191	半金锡10″	02.02.04.014	SPCC	镀镍
UB.2.F.003	03.01.06.021	PBT	红色	02.01.08.011	C5191	半金锡10″	02.02.04.014	SPCC	镀镍
UB.2.F.004	03.01.06.022	PBT	绿色	02.01.08.011	C5191	半金锡10″	02.02.04.014	SPCC	镀镍

MEASURE POINT: QUADRANT POINT (QP) TANGENCY POINT (TP) INTERSECTION POINT (IP)

UNLESS OTHERWISE SPECIFIED, TOLERANCE:
X. ±0.15
X.x ±0.10
X.xx ±0.05
X.xxx ±0.03
ANGLES ±2°

鸿康科技（东莞）有限公司
Hongkang Technology (Dongguan) Co., Ltd

DESIGN: Gu Yi Fei	DATE: 2023.09.18	TITLE: USB 2.0 A 母 双面DIP180度成品图	
APPRO:	DATE:		
REV.: X1	SCALE: 1:1	UNIT: mm	
SIZE: A4	SHEET: 1/1		PART NO.: JSX-TC24FA-2006

This document is exclusively owned by Hongkang Electronic Technology Company and shall not be used, in whole or in part, without prior written permission. Email:hkconn@163.com