


RoHS 2.0


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
A0.	/.	正式版发行		
A1.	/.	HD	2026/04/09	LJY
A2.	/.	修改折弯角位置	2026/05/15	LJY

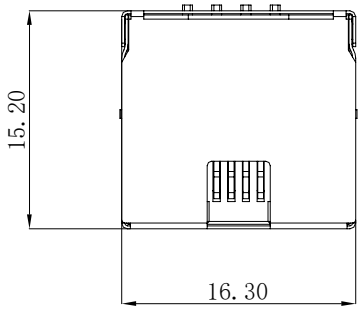





3D VIEW



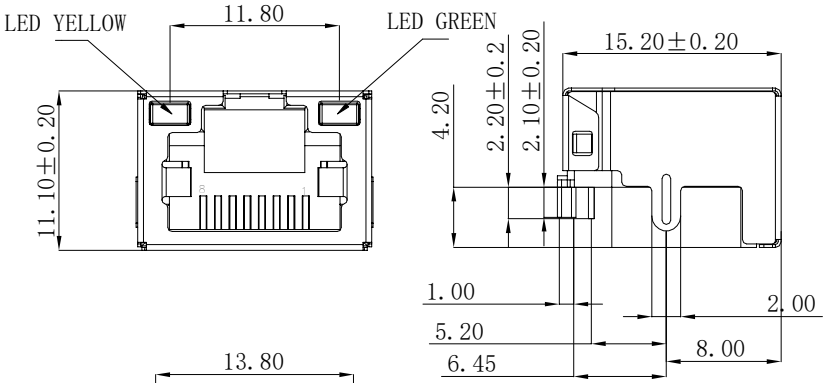

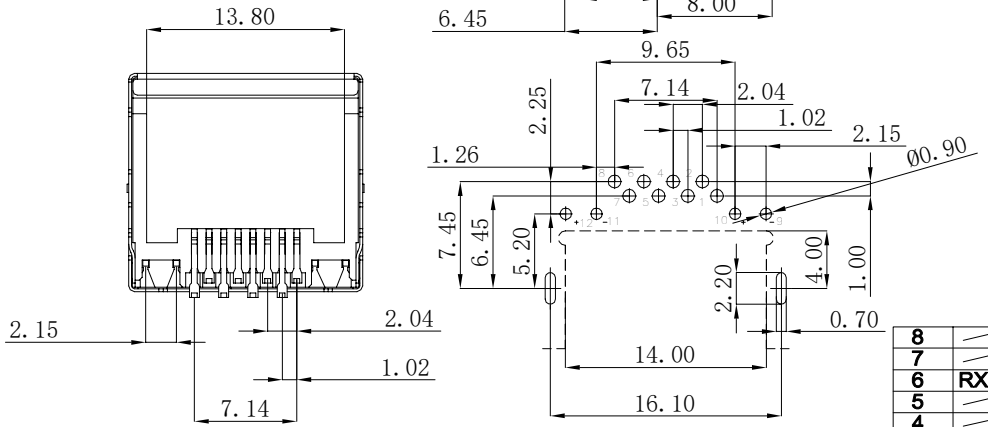

PCB参考图



PIN序	说明
8	
7	
6	RX-
5	
4	
3	RX+
2	TX-
1	TX+

NOTES:

1. MATERIAL:
   1.1. HOUSING: LCP ,COLOR IS BLACK;
   1.2. CONTACT: COPPER ;
2. FINISH: GOLD PLATED G/Fu";
4. ELECTRICAL:
   4.1. VOLTAGE RATING: 125 VAC RMS;
   4.2. CURRENT RATING: 1.5 AMP;
   4.3. CONTACT RESISTANCE: 35MILLIOHMS MAX.;
   4.4. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz,1MIN.;
   4.5. INSULATION RESISTANCE: 500MEGOHMS MIN @500V DC.;
5. MECHANICAL:
   5.1. MATING/UNMATING FORCE: 22N MAX.;
   5.2. RETENTIION STRENGTH: 50N MIN.;
   5.3. OPERATING LIFE: 750 CYCLES MIN.;
6. ENVIRONMENTAL:
   6.1. STORAGE TEMPERATURE RANGE: -40° C~+85° C;
   6.2. OPERATION TEMPERATURE RANGE: -25° C~+70° C;
7. SALT SPRAY TEST:8H(EXCLUDING RIVETED BENDS)

深圳市虹康科技有限公司
Shenzhen Hongkang Technology Co., Ltd

UNLESS OTHERWISE, GENERAL TOLERANCE:
X.xxx ±0.10
X.xx ±0.20
X.x ±0.30

ANGULAR:
X.xx° ±1°
X.x° ±3°
X.° ±5°

NAME: RJ沉板4.2带灯带B壳

P/N:

DWG NO:

THIRD ANGLE PROJECTION

UNIT:	SCALE	SIZE:	SHEET:	REV.
MM	1:1	A4	1/1	A2

DRAWN: CHECKED: APPROVED: