
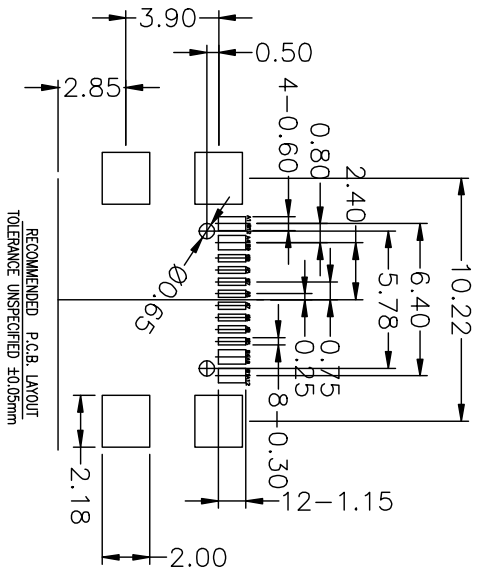

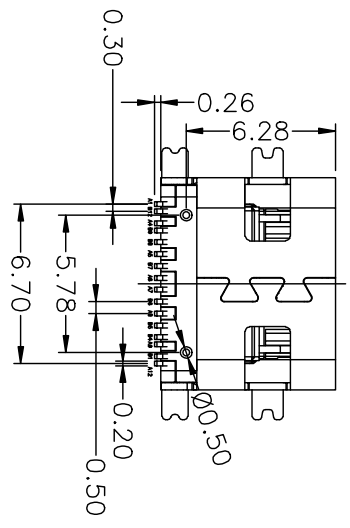
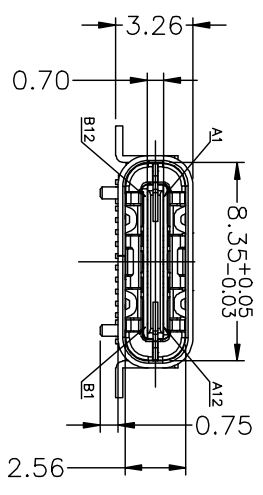


# 客户图

REV	LTR	DESCRIPTION	DATE	APPROVED
A0			20160406	LTY

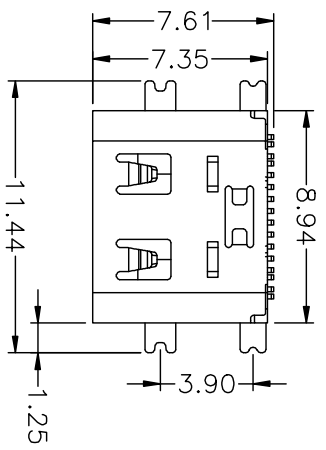


- 备注:**
- 1.1 胶芯: LCP+30%G.F UL94V-0
  - 1.2 端子: 磷铜, T=0.12mm; 镍底, 镀金 $\times\mu$ "
  - 1.3 外壳: 不锈钢, T=0.30mm; 表面镀镍 $100\mu$ " 或亮锡 $100\mu$ "

- 2. 主要特性:**
- 2.1 额定电流: 0.5A
  - 2.2 接触阻抗: 30mΩ MAX
  - 2.3 绝缘阻抗: 100MΩ MIN 250V DC
  - 2.4 耐压测试: 250V AC
  - 2.5 沾锡性: 温度 $250\pm 5^{\circ}\text{C}$ , 时间 $5\pm 0.5\text{s}$
  - 2.6 整体插入力: 3.57kgf MAX  
整体拔出力: 1.02kgf MIN
  - 2.7 使用寿命: 10000次
  - 2.8 工作温度:  $-30^{\circ}\text{C}\sim +80^{\circ}\text{C}$

TOLERANCES	
.X	$\pm 0.30$
.XX	$\pm 0.20$
.XXX	$\pm 0.10$
ANGLES	$\pm 1.00^{\circ}$

APRD.: TITLE: 深圳市顺宏康科技有限公司  
PART NO.: SHK-31011  
DRAWING NO.: 036-016  
TITILE: USB Type-C/F 短体7.6 SMT青蛙脚 16PIN母座



CHECK:	DRAWN:	REV.:	SIZE:	UNIT:	SCALE:	SHEET:
	LTY	A/0	A4	M M	1 : 1	1 / 1