
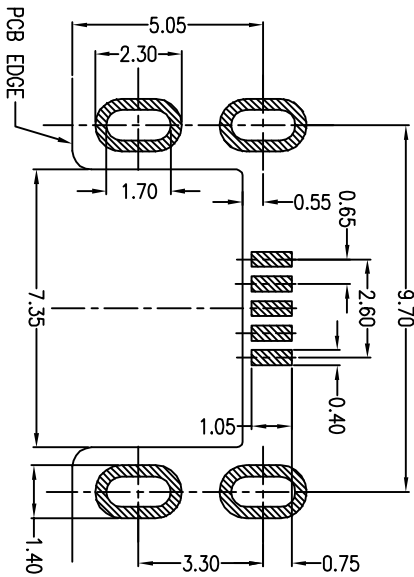
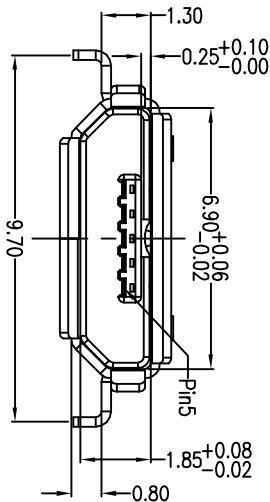
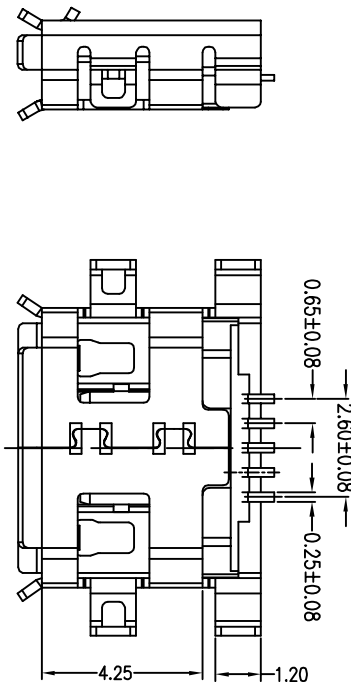
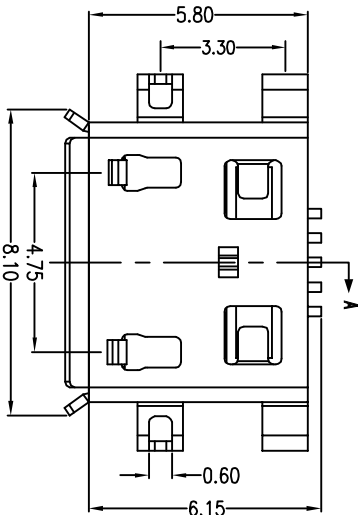
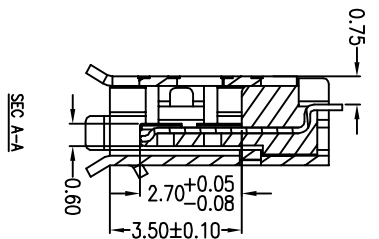


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

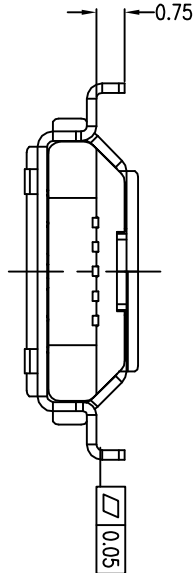

RECOMMENDED PCB LAYOUT

- Note:
- 1.Material:
- 1.1 Housing: High temperature thermoplastic with g.f.i,UL94v-0
- 1.2 Contact: copper alloy,t=0.15mm
- 1.3 Shell: copper alloy,t=0.25mm
- 2.Specification:
- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 MΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: -30°C~80°C

A 01 S B 1 4 1 B 3-379

- ① 产品代号 A: 成品
- ② 产品系列 01: micro usb spin
- ③ 产品类别 S: 插座
- ④ 产品类型 B: B TYPE
- ⑤ 外壳材质 1: C288R-1/2H
- ⑥ 端子材质 4: C5191R-EH
- ⑦ 主体材质 1: L0P
- ⑧ 主体颜色 B: 黑色
- ⑨ 下板类型 3: 沉板式
- ⑩ 细节序号 379: micro usb to B Type 沉板式30 插脚全插有导位板机

PART NO:	A01SB141B3-379		MATERIAL:	SEE NOTE	
MODEL NO:	XX		FINISH:	SEE NOTE	
UNIT:	MM	SIZE:	A4	COLOR:	SEE NOTE
TOLERANCE UNSPECIFIED		DR:	xiayouhong		
.x	0.15	CHK:			
.xx	0.10	APP:			
.xxx	0.05	SCALE:	5:1	DATE:	2014.03.01
Ang	1°	DWG NO:	SHK-20045	REV:	A

深圳市顺宏康科技有限公司