
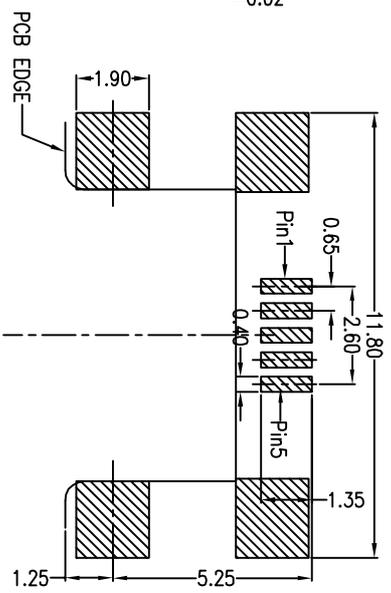
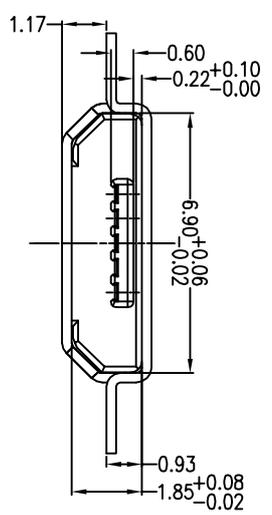
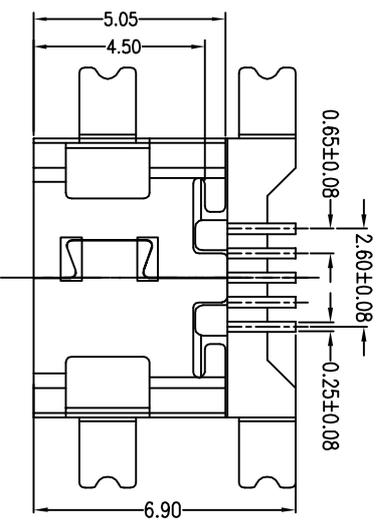

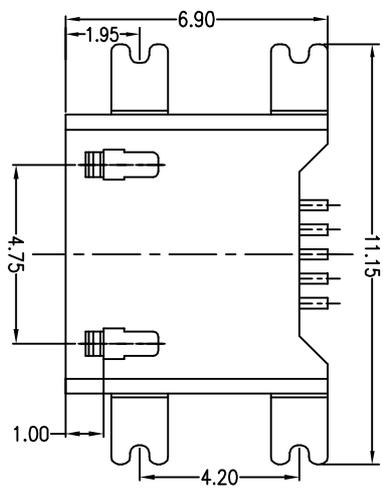
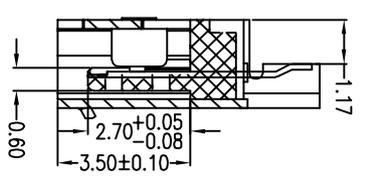


REV.	ECH NO	LOCATIONS	DESCRIPTION	DATE

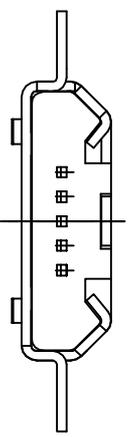

RECOMMANDED PCB LAYOUT

- Note:
- Material:
 - Housing: High temperature thermoplastic with g.f.U.L94V-0
 - Contact: copper alloy,t=0.15mm
 - Shell: copper alloy,t=0.25mm
 - Specification:
 - Current rating: 1 A Max.
 - Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - Contact resistance: 30 MΩ Max.
 - Insulation resistance: 100 MΩ Min.
 - Total mating force: 3.57 Kgf Max.
 - Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.
 - Temperature range: -30°C~80°C

A 01 S B 1 4 1 B 4-250

- 产品代号 A: 规格
- 产品系列 01: micro usb 5pin
- 产品类别 S: 母座
- 产品类型 B: B TYPE
- 外壳材质 1: C2680R-H
- 端子材质 4: (S191R-BI)
- 主体材质 1: LP
- 主体颜色 B: 黑色
- 下板类型 4: 波板式
- 细节流水 200: micro usb 5 B Type (波板式); 170: micro usb 5 B Type (波板式)

PART NO: A01SB141B4-250	MATERIAL: SEE NOTE	深圳市顺宏康科技有限公司 深圳 宝安区 西乡街道 铁岗社区 铁岗工业区 17号 1楼	
MODEL NO: XX	FINSH: SEE NOTE		
UNIT: MM	SIZE: A4	TITLE: Micro usb 5s B Type (波板式 1.17) 四脚全插无导位	DWG NO: SHK-20046
TOLERANCE UNSPECIFIED	DR: xiaoyulong	SCALE: 5:1	REV: A
.x 0.15	CHK:	DATE: 2012.05.22	
.xxx 0.10	APP:		
.xxx 0.05			
Ang.			