
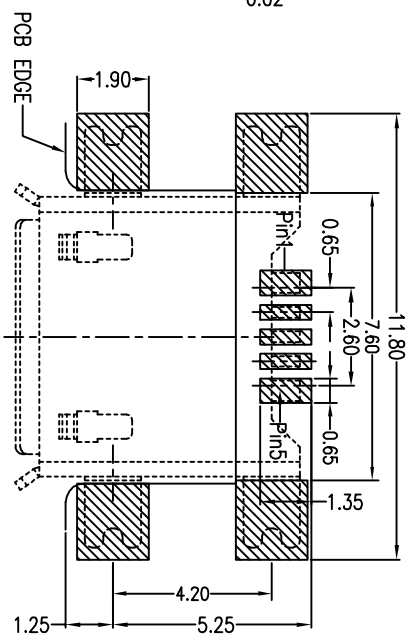
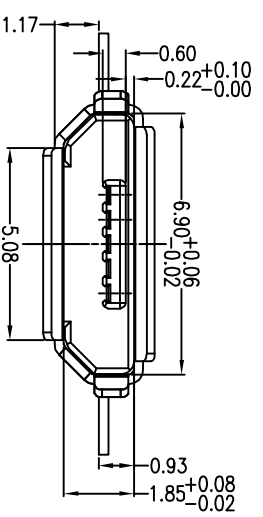
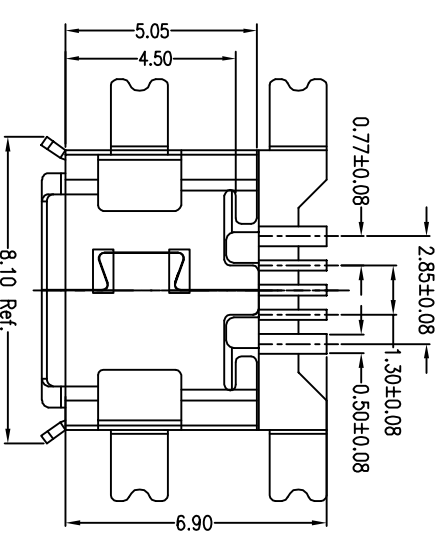

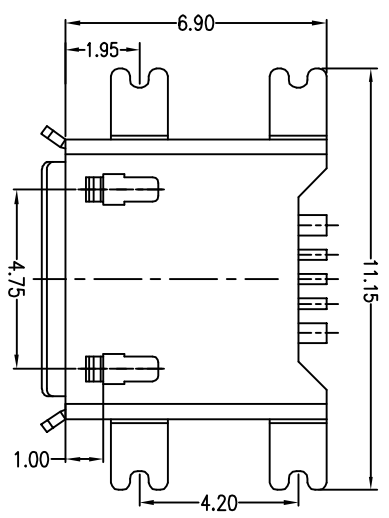
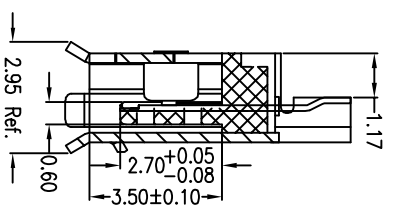


REV.	ECH NO	LOCATIONS	DESCRIPTION	DATE

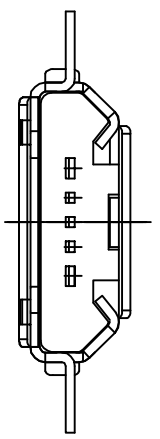

RECOMMENDED PCB LAYOUT  
PCB圖仅供参考

- Note:
- Material:
    - Housing: High temperature thermoplastic with g.f.U.L94V-0
    - Contact: copper alloy,t=0.15mm
    - Shell: copper alloy,t=0.25mm
  - Specification:
    - Current rating: 3A Max. voltage: 100 V(ac) for 1 min.
    - Dielectric withstanding
    - Contact resistance: 30 MΩ Max.
    - Insulation resistance: 100 MΩ Min.
    - Total mating force: 3.57 Kgf Max.
    - Total unmating force: 1.0 Kgf Min.
    - Temperature range: -30°C~80°C

A 01 S B 1 4 1 B 4-394  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- 产品代号 A: 样品
- 产品系列 01: micro usb Spn
- 产品类别 S: 母座
- 产品类型 B: B TYPE
- 外壳材质 1: 02680R-H
- 端子材质 4: 05191R-BH
- 主体材质 1: 10P
- 主体颜色 B: 黑色
- 下板类型 4: 液板式
- 细节序号 04: micro usb Spn B Type (液板式) 17: 半圆脚全脚; Spn: 通宽

PART NO:	A01SB141B4-394	MATERIAL:	SEE NOTE
MODEL NO:	XX	FINISH:	SEE NOTE
UNIT:	MM	SIZE:	A4
TOLERANCE UNSPECIFIED		DR:	zhiyoutong
.x	0.15	CHK:	
.xx	0.10	APP:	
.xxx	0.05	SCALE:	5:1
Ang.	1°	DATE:	2014.04.10

深圳市顺宏康科技有限公司

Micro usb Ss B Type 液板式; 17: Smt 四脚全脚; Spn: 加宽

DWG NO: SHK-20046  
REV: A

