

REV.	ECN.NO.	APPD.
A	/	LXQ

备注:

电气性能:

接触阻抗: 50 毫欧 (最大)

绝缘阻抗: 100 兆欧 (最小)

耐高压: 100V AC 一分钟

材料:

胶芯: LCP

端子: 磷铜C5191

外壳: C2680/SPCC

电镀:







端子:

接触区域镀金

焊接区域镀亮锡40u"min

外壳:

全区域镀镍40u"min

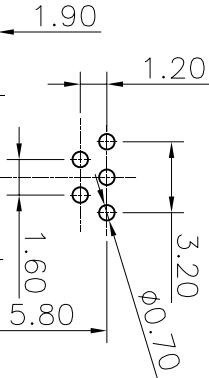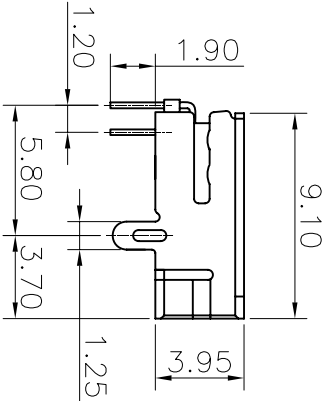

- U141-011X-XXXX1
- 1: 铁壳镀镍
 - 5: 铜壳镀镍
 - H: C5191 半金1u"亮锡
 - J: C5191 半金3u"亮锡
 - K: C5191 半金5u"亮锡
 - M: C5191 半金10u"亮锡
 - 1: PA66
 - 2: PBT
 - 6: LCP
 - 1: 吸塑盒
 - 2: 吸塑管
 - 3: 载带
 - 6: 载带+贴麦拉
 - 1: 黑色
 - 2: 白色
 - 3: 米黄色

PCB.LAYOUT

TOL: ±0.05

TOLERANCE UNLESS OTHERWISE SPECIFIED		OTHERWISE SPECIFIED	
XXX	±0.10	X'	±3
XX	±0.20	X'	±2
X	±0.30	X'	±2
APPROVED		PART NAME:	
CHECKED		PART No:	
DRAWED		PROJECTION:	
DATE		UNIT:	
2014.08.09		mm	
		SCALE	
		SHEET	
		REV.	
		A	