
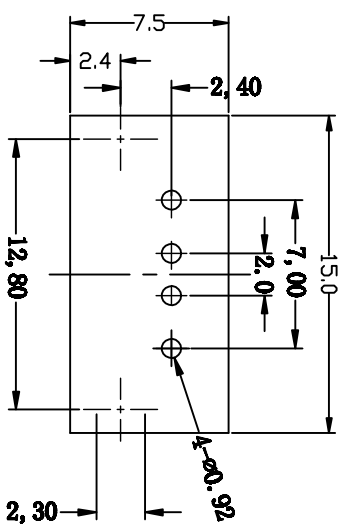
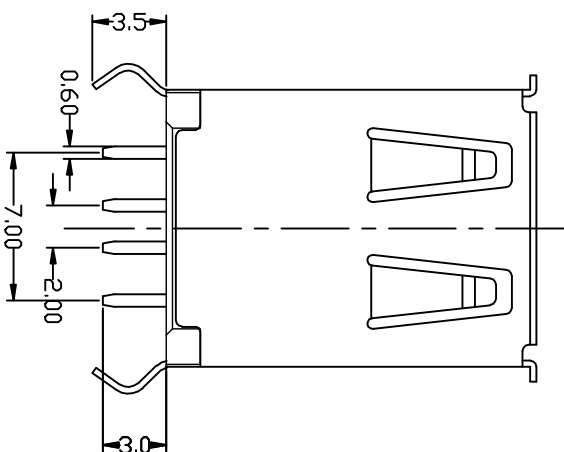
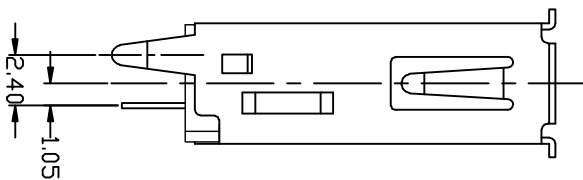
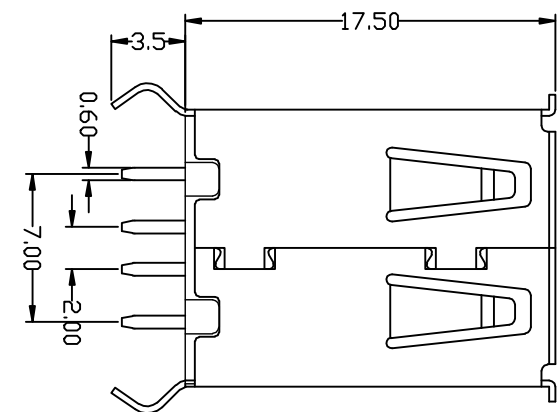


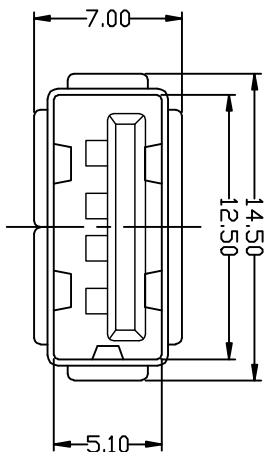

Recommended P.C.B. Layout
Thickness: 1.6 MIN

NOTES:

- 1.1 HOUSING: PBT BK;
- 1.2 CONTACTS: COPPER ALLOY ;
- 1.3 SHELL: STEEL ALLOY .

2. FINISHED:

SHELL: 50u" MIN NI UNDER PLATED OVER ALL;
CONTACTS: GOLD FLASH ON CONTACT AREA
Tin 80u" MIN ON SOLDER AREA.

SPECIFICATIONS:

Contact current Rating: 1ampere.
DIELECTRIC Withstanding Voltage: AC 500V.
Insulation resistance: 1000M Ω Minimum.
Contact Resistance: 30m Ω Maximum.
Operating Temperature: -30°C to +85°C.

一、般、公、差		制、图	Y X
GENERAL TOL.		DRAWN	
X $\pm$ 0.3		审、核	
XX $\pm$ 0.2		CHECKED	
Y $\pm$ 0.0		技、准	
XX $\pm$ 0.0		APPROVAL	
		角、法	
		TRAIL	

图、面、发、行	交、通、通、明	签、名	时、间	审、核	时、间
REV	NOTIFICATION	SIGN	DATE	CHECKED	DATE
1	2	3	4	5	6

深、圳、市、顺、宏、康、科、技、有、限、公、司	产、品、名、称	产、品、编、号	图、号	张、数
SHUN HONG KONG TECHNOLOGY CO., LTD.	USB-A 插板 长 17.5 弯角	SHK-20075	DWG NO	SHEET
	单、位	比、例		UNIT
	mm	SCALE		