

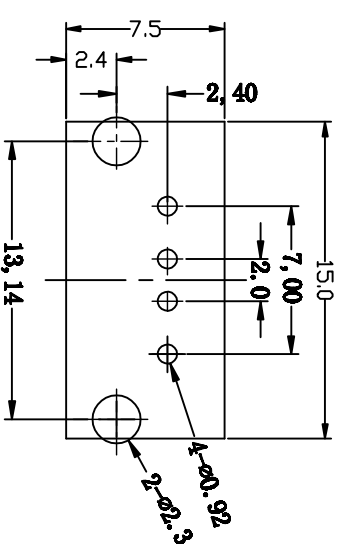
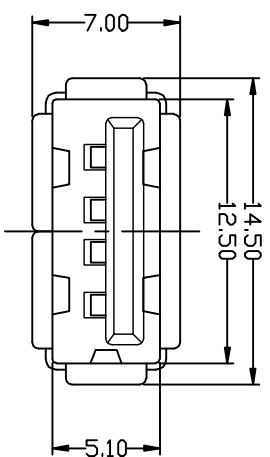
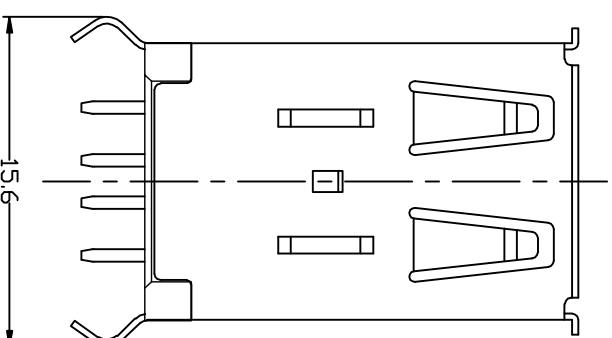


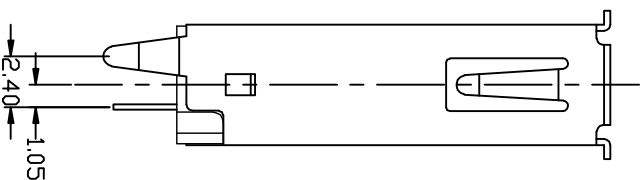

**Recommended P. C. B. Layout
Thickness: 1.6 MIN**

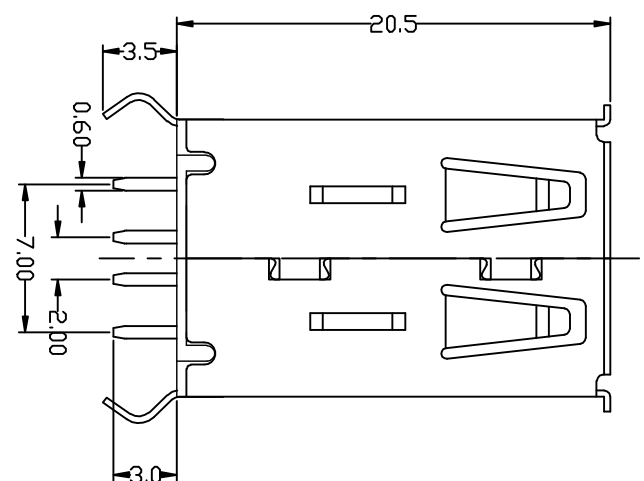

NOTES:
1. MATERIAL:

2. FINISHED:
SHELL: 50u" MIN N1 UNDER PLATED OVER ALL;
CONTACTS: GOLD FLASH ON CONTACT AREA
Tin 80u" MIN ON SOLDER AREA.

SPECIFICATIONS:

Contact current Rating: 1ampers.
 DIELECTRIC Withstanding Voltage: AC 500V.
 Insulation resistance: 1000M Ω Minimum.
 Contact Resistance: 30m Ω Maximum.
 operating Temperature: -30 $^{\circ}$ C to +85 $^{\circ}$ C.

										张数		02	
										SHEET			
										单位		MM	
										比例		SCALE	
深圳市顺宏康科技有限公司										产品名称		USB-AF插板长体20.5寸脚	
产品型号										PRODUCT NAME			
SJK-20076										图号		DWG NO	
图法										PART NO			
角法										角法			
Y I										制图		Y I	
审核										审核			
X ± 0.03										X ± 0.03			
X ± 0.2										X ± 0.2			
一般公差										GENERAL TOL			
										时间		DATE	
										审核		CHECKED	
										时间		DATE	
										签名		SIGN	
										2015.9.23			
										变更说明		MODIFICATION	
										版本		REV	
										图面发行			
										A			