

规格说明:Specification:

电气特性:Electrical:

- 1 额定电流:Current Rating
- 1 5A/Contact terminal
- 2 额定电压:Voltage Rating
- 30V DC
- 3 接触阻抗:Contact Resistance
- 30 milliohms MAX
- 4 耐电压:Dielectric Withstanding Voltage:
- 500 V AC AT Sea Level
- 5 绝缘阻抗:Insulation Resistance:
- 1000MEGA ohms MIN



物理性能:Mechanical:

- 1 插拔力:Contact Force
- Mate Force: 3 ~ 57kgf(MAX)
- Ummate Force: 1 ~ 02kgf(MIN)
- 2 端子保持力:Terminal Retention
- 1 ~ 2kgf(MIN)


原材料:Material:

- 1 塑胶:Temperature Thermoplastics,
- UI 94V 0 PBT White/Black
- 2 端子:Contact Copper Alloy C2680
- 3 外壳:Shell: Copper Alloy C2680/SPCC
- 电镀:Finish:

- 1 端子:Contact: Plated Gold Plating Area;
- Thickness: 10 ~ 15 Microns
- 2 外壳:Shell:
- Nickel Plating

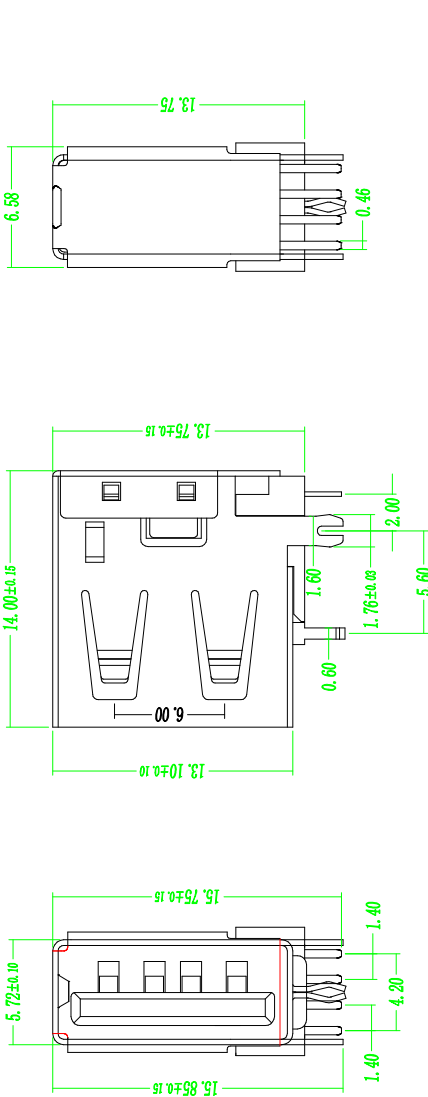

SECTION A-A

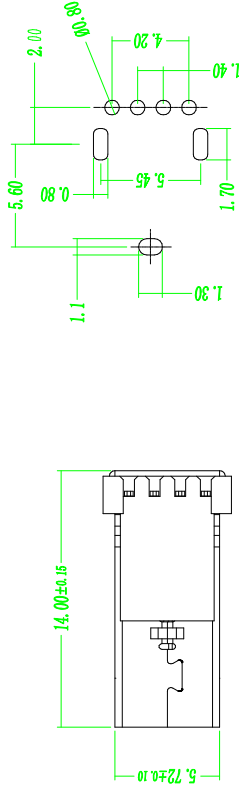

PCB LAY-OUT
(BOTTOM VIEW)

深圳市顺宏康科技有限公司

品名 (ITEM NO)

料号 (PART NO)

模号 (MODEL NO)

图号 (DWG NO)

版本 (REV)

日期 (DATE)

设计 (DESIGN)

审核 (CHECKED)

核准 (APPROVED)

A/0

SHK-20084

A008-11

单位 (UNIT): MM

比例 (SCALE) 1:1

公差

未注公差

TOLERANCE UNSPECIFIED

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

X.X° ±5°