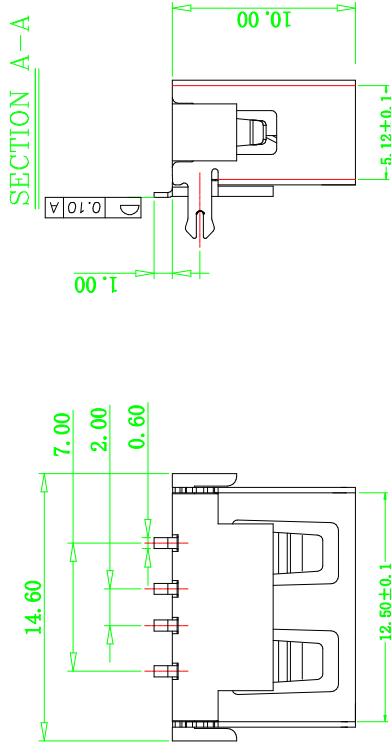




规格说明:Specifications:

电气特性:Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触阻抗: Contact Resistance
30 milliohms MAX
- 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
- 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

- 塑胶: Housing:
Hing Temperature Thermoplastics,
U1 94V-0 PBT White/Black
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C2680/SPCC
电镀: Finish:
1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell: Nickel Plating

RECOMMENDED PCB LAYOUT
THICKNESS=1.0mm (TOLERANCE: ±0.05)

深圳市顺宏康科技有限公司

品名 (ITEM NO) A/F 短体10.0 SW铜壳 (后两脚无卷边H=6.3)

料号 (PART NO) SHK-20095

模号 (MODEL NO) A008-1N-7

图号 (DWG NO)		单位 (UNIT): MM
版本 (REV)	A/0	比例 (SCALE) 1:1
日期 (DATE)		
设计 (DESIGN)		未注公差
审核 (CHECKED)		TOLERANCE UNSPECIFIED
核准 (APPROVED)		X.X ±0.30 X.XY ±0.20 X.XXX ±0.10 X.X° ±5° X.X° ±2°