
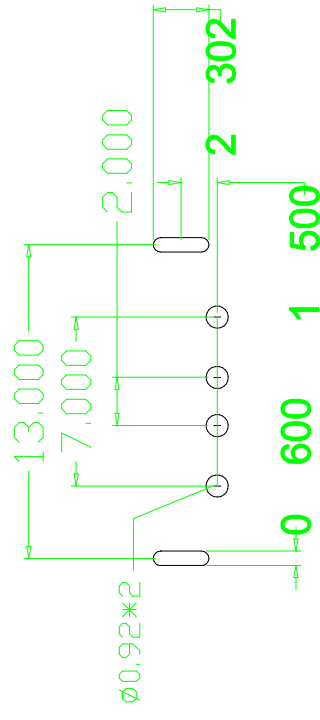
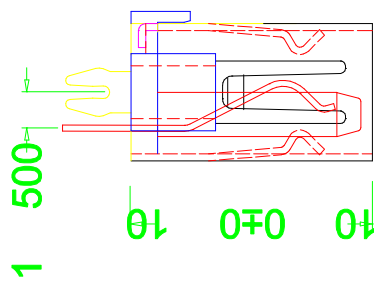


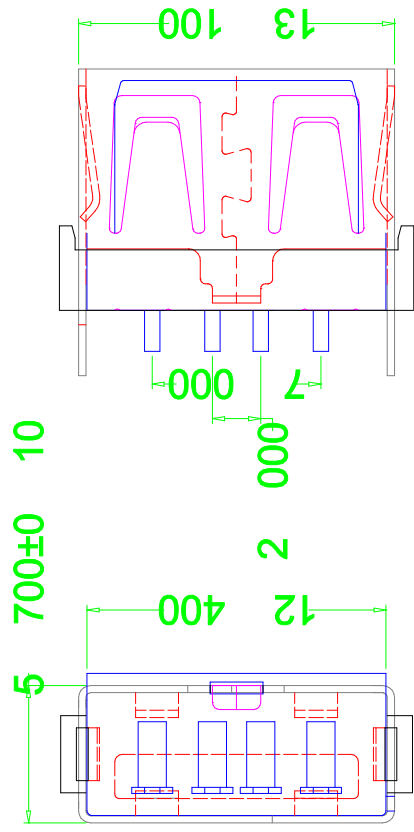

规格说明: Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MΩ ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Umate Force
Mate force: 3.57kgf (MAX)
Umate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1. 0kgf (MIN)

原材料:Material:

- ## 1. 塑胶:Housing:

2. 端子: Contact: Copper Alloy C2680

电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Tails
端子四周镀50U"(MIN) 锡, 镀金区域镀100-200U"镀金1U"

2. 外壳:Shell:
Nickel Plating
铜壳四周镀80U"(MIN)锡

成品图	MANUFACTURE DWG
公差一览表	
TOLERANCE UNLESS OTHERWISE	
.X $\pm$ 0.15	X. $\pm$ 5°
.XX $\pm$ 0.05	X. $\pm$ 2°
.XXX $\pm$ 0.02	.XX $\pm$ 1°

深圳市顺宏康科技有限公司

日期 DATE	单位 UNIT	制图 DRAWING	图号 DWG NO.	SHK-20105
审核 CHECKED	比例 SCALE	设计 DESIGN	品名 ITEM	10.0A母外壳
核准 APPROVE	角法 VIEW	版本 VER	页码 PAGE	PG1