
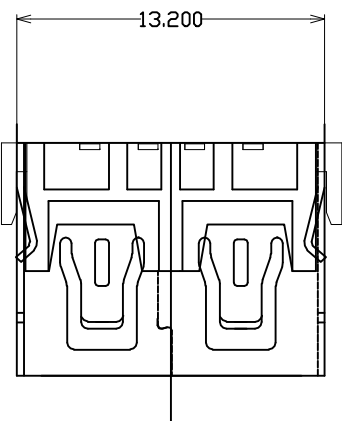


1				2				3				4				5				6				7				8			
NO.		PART NO.		NAME		MATERIAL		COLOR		QTY		REV		DATE		DESCRIPTION		REVISIONS		DATE		DESCRIPTION		DATE		DESCRIPTION		DATE		DESCRIPTION	
1		A02-240X2000				Copper Alloy/SPCC				1PCS						试版本				2011.08.26											
2		A02-1000X110				PBT				1PCS																					
3		A02-320X1000				Copper Alloy				4PCS						重新修订图面				2011.09.09											

NOTES:

1. MATERIAL SPECIFICATION
- 1) INSULATION MATERIAL: THERMOPLASTIC.
- 2) SHELL: COPPER ALLOY/SPCC, T: 0.30mm
- PLATING: NICKEL
- 3) TERMINAL: COPPER ALLOY, T: 0.25mm
- PLATING: GOLD/TIN PLATED.
2. ELECTRICAL CHARACTERISTICS:
- 1) INSULATION RESISTANCE: 100MΩ MIN.
- 2) CONTACT RESISTANCE: 30mΩ MAX.
- 3) WITHSTANDING VOLTAGE: 500V AC.
3. MECHANICAL CHARACTERISTICS:
- 1) INSERTION FORCE: 3.57kgf MAX.
- 2) EXTRACTION FORCE: 1.02kgf MIN.

ORDERING INFORMATION

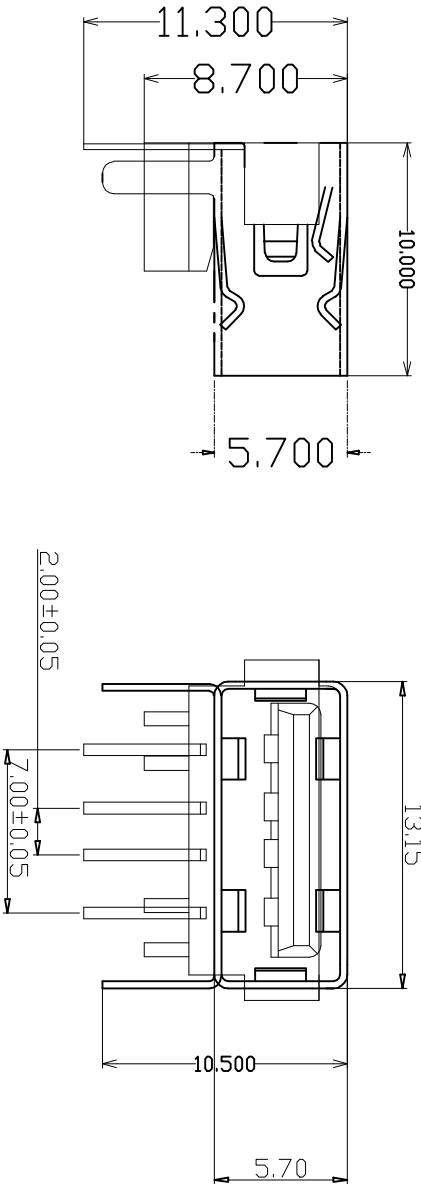

RECOMMENDED P.C.B LAYOUT

深圳市顺宏康科技有限公司



TOLERANCES					MATERIAL: SHK-20106		UNIT: M/M		THIRD ANGLE		DRAWING BY SU		Brand/Model: USB A/P 接口 10.0	
I.	II.	III.	IV.	V.	SUPERFICIERS:		SCALE: 1:1		CHECK BY QING		APPROVED LEE		PART NAME:	
A	±0.20	±0.10	±0.05	±0.03	±1°									
B	±0.50	±0.20	±0.10	±0.05	±2°									
C	±0.80	±0.30	±0.15	±0.08	±3°									