


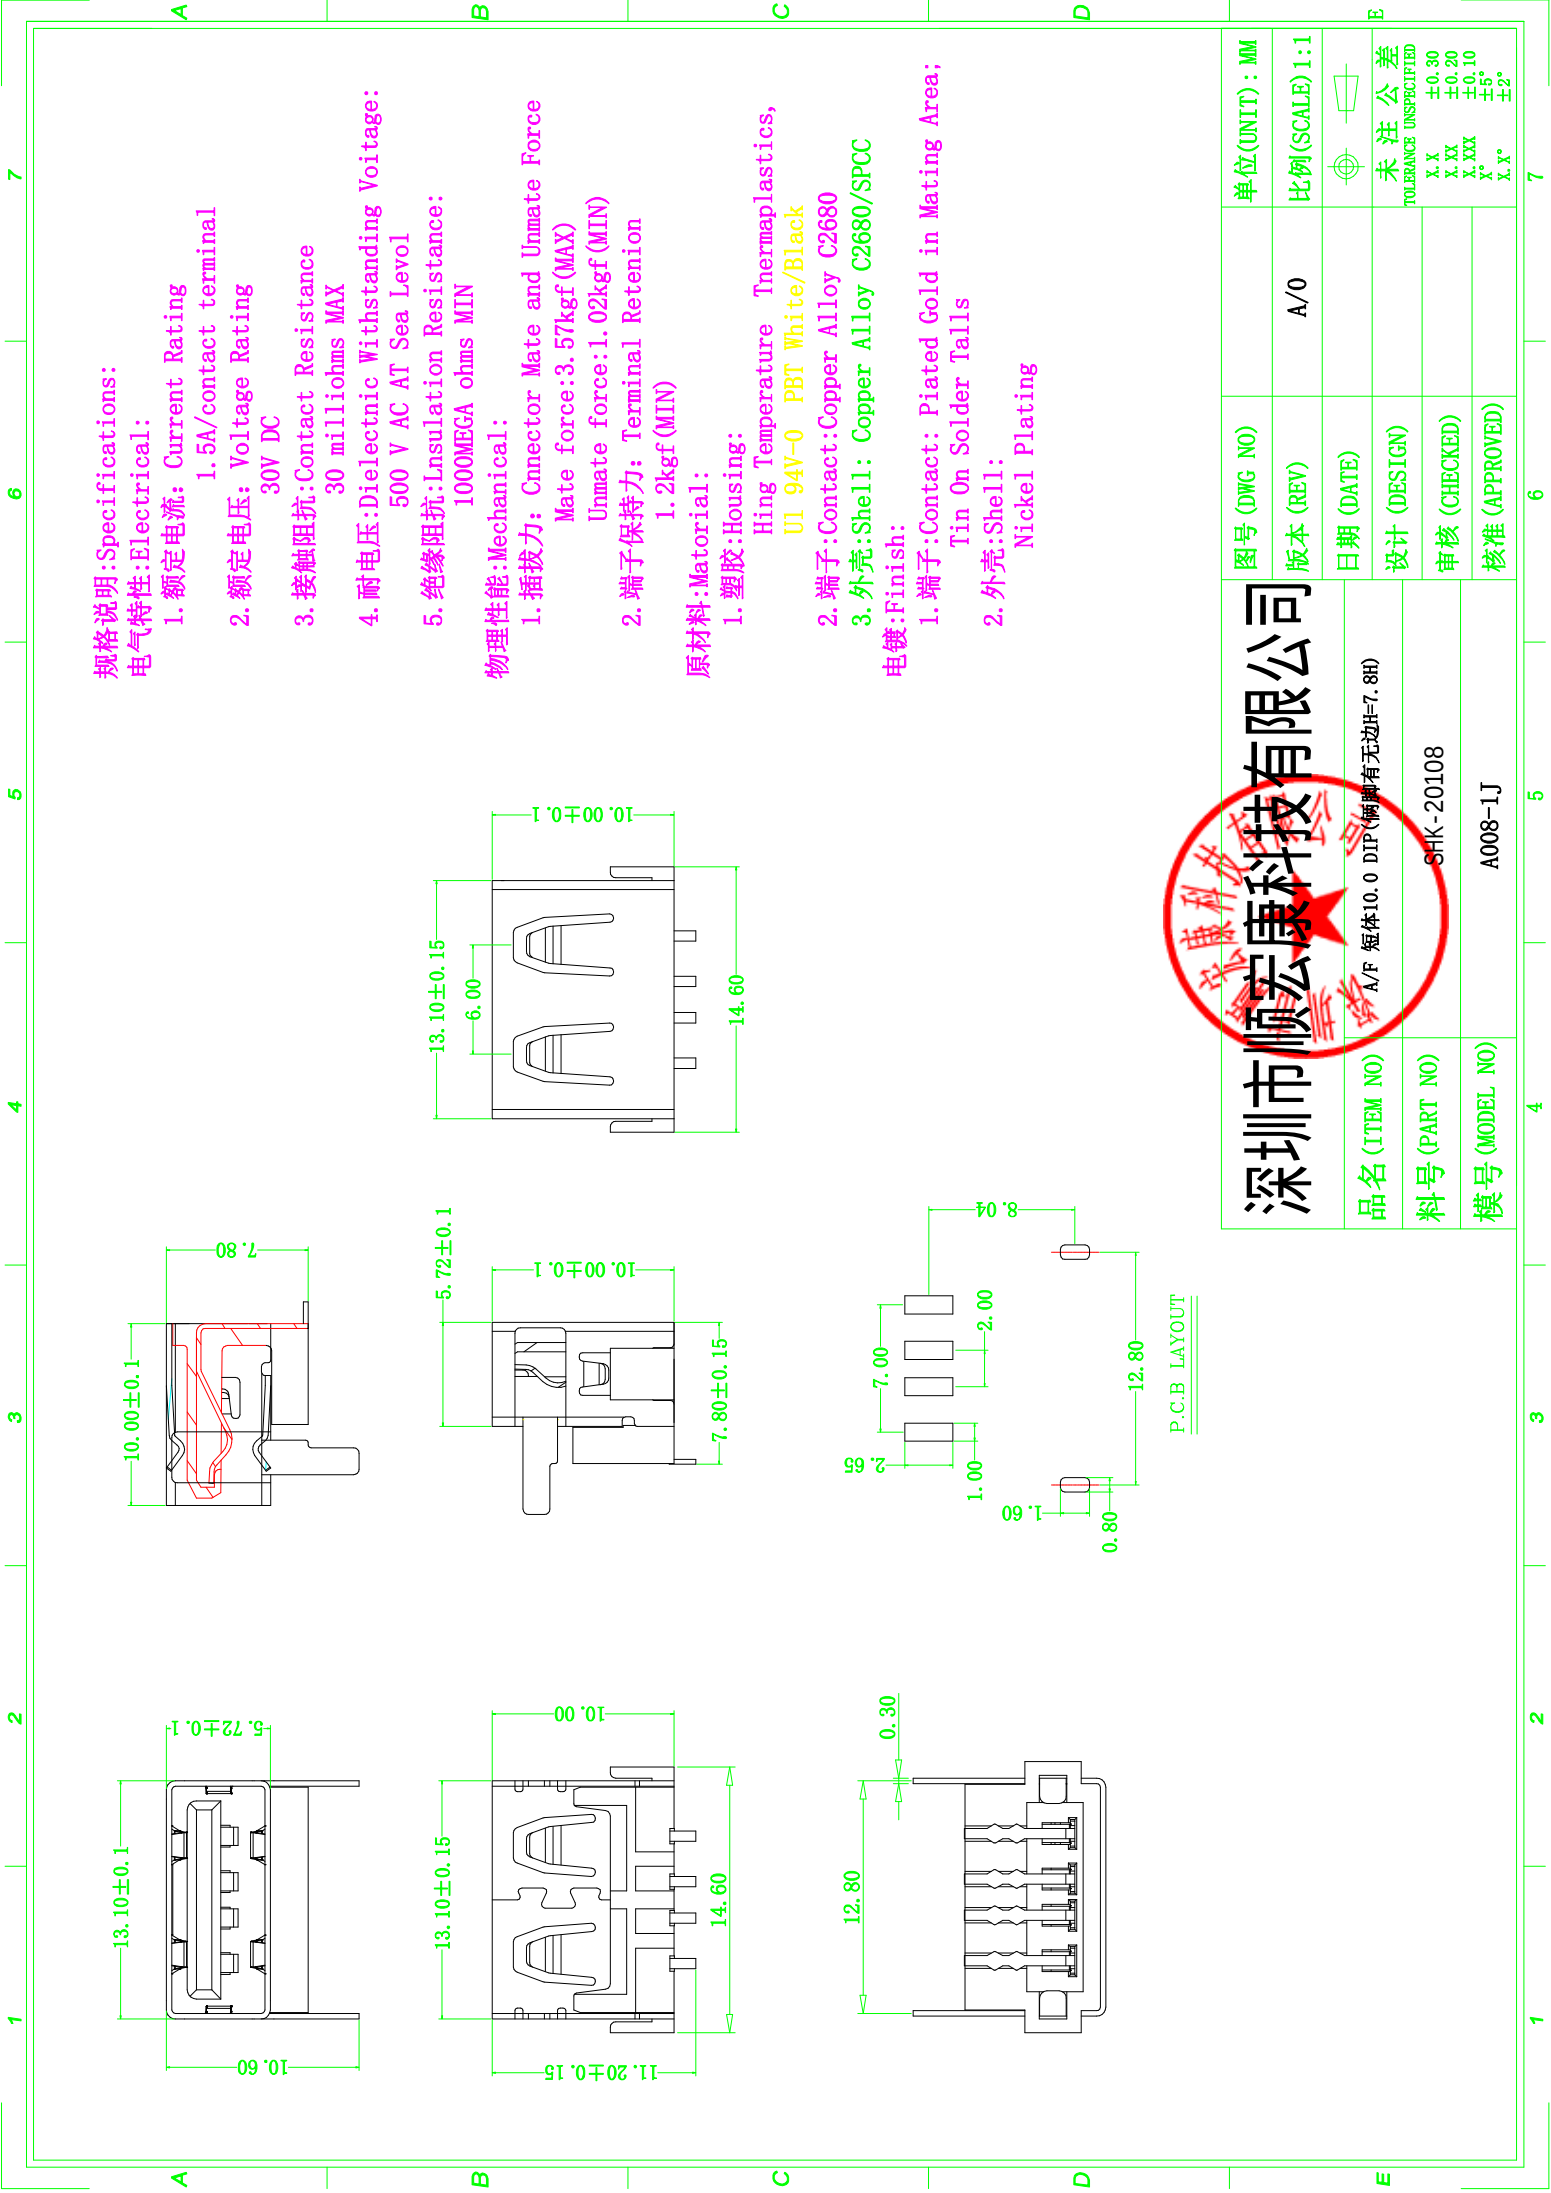

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating  
1.5A/contact terminal
2. 额定电压: Voltage Rating  
30V DC
3. 接触阻抗:Contact Resistance  
30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voitage:  
500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:  
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Cnnector Mate and Unmate Force  
Mate force:3.57kgf(MAX)  
Unmate force:1.02kgf(MIN)
2. 端子保持力: Terminal Retention  
1.2kgf(MIN)

原材料:Matorial:

1. 塑胶:Housing:  
Hing Temperature Thermaplastics,  
U1 94V-0 PBT White/Black
  2. 端子:Contact:Copper Alloy C2680
  3. 外壳:Shell: Copper Alloy C2680/SPCC
- 电镀:Finish:
1. 端子>Contact: Plated Gold in Mating Area;  
Tin On Solder Talls
  2. 外壳:Shell:  
Nickel Plating

P.C.B LAYOUT

深圳市顺宏康科技有限公司

品名 (ITEM NO)  
A/F 短体10.0 DIP(侧脚有无边H=7.8H)

料号 (PART NO)  
SHK-20108

模号 (MODEL NO)  
A008-1J

|               |                |
|---------------|----------------|
| 图号 (DWG NO)   | 单位 (UNIT) : MM |
| 版本 (REV)      | 比例 (SCALE) 1:1 |
| 日期 (DATE)     |                |
| 设计 (DESIGN)   |                |
| 审核 (CHECKED)  |                |
| 核准 (APPROVED) |                |

|                |                |
|----------------|----------------|
| 公差 (TOLERANCE) | 公差 (TOLERANCE) |
| X.X            | ±0.30          |
| X.XX           | ±0.20          |
| X.XXX          | ±0.10          |
| X°             | ±5°            |
| X'°            | ±2°            |