

规格说明:Specifications:

电气特性:Electrical:




1. 额定电流: Current Rating 1.5A/contact terminal
2. 额定电压: Voltage Rating 30V DC
3. 接触阻抗:Contact Resistance 30 milliohms MAX
4. 耐电压:Dielectric Withstanding Voltage: 500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance: 1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Unmate Force Mate force:3.57kgf(MAX) Unmate force:1.02kgf(MIN)
2. 端子保持力: Terminal Retention 1.2kgf(MIN)

原材料:Material:

1. 塑胶:Housing: Hing Temperature Thermoplastics, PBT White/Black
 2. 端子:Contact:Copper Alloy C2680
 3. 外壳:Shell: Copper Alloy C2680/SPCC
- 电镀:Finish:
1. 端子:Contact: Plated Gold in Mating Area; Tin On Solder Tails
 2. 外壳:Shell: Nickel Plating

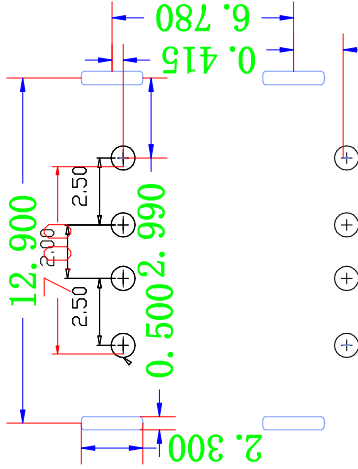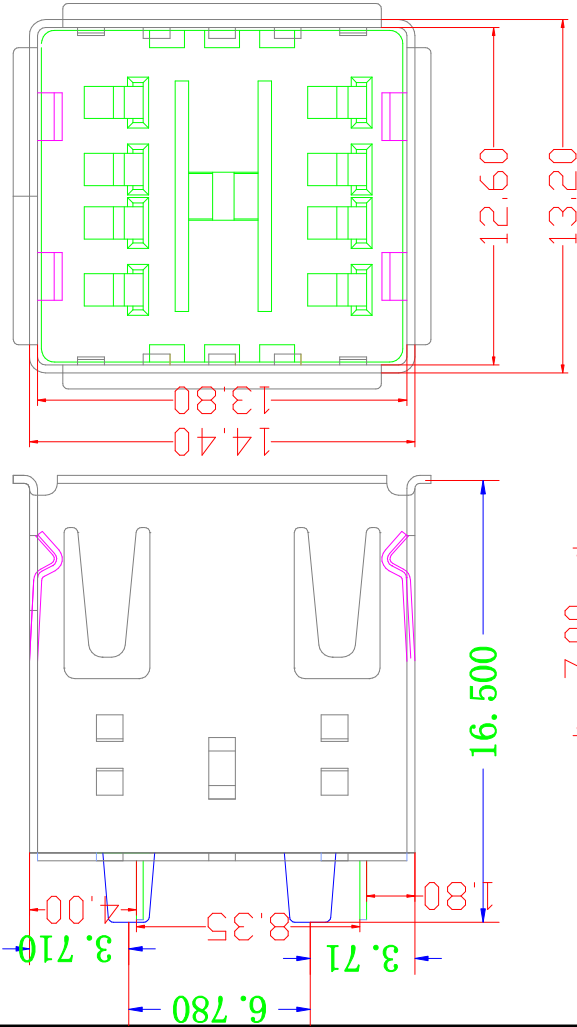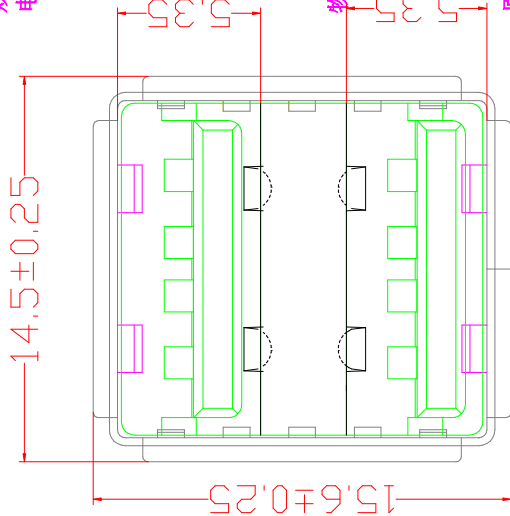

RBCOMMEND P. C. B PATTBN LAY OUT

深圳市顺宏康科技有限公司

RBCOMMEND P. C. B PATTBN LAY OUT

UNLESS OTHERWISE SPECIFIED TOLERANCE

.X ±0.20
.XX ±0.15
.XXX ±0.10
ANG. ±2°

H.Q.huocuy

APPROVED

DATE

UNIT MM

SCALE 3/1

SIZE A4

TITLE USB AF 双层直插14.2MM四脚

PART NO. SHK-20121

DOC. NO.

REV.

A