

规格说明:Specifications:
电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗:Contact Resistance
30 milliohms MAX
4. 耐电压 :Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Umate Force
Mate force:3.57kgf(MAX)
Umate force:1.02kgf(MIN)
2. 端子保持力: Terminal Retention
1.2kgf(MIN)

原材料:Material:

1. 塑胶:Housing:




Hing Temperature Thermoplastics,
PBT White/Black

2. 端子:Contact:Copper Alloy C2680

3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

1. 端子:Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳:Shell:
Nickel Plating

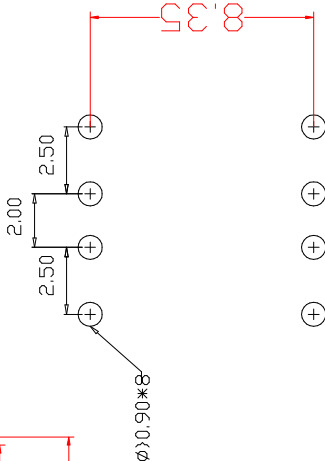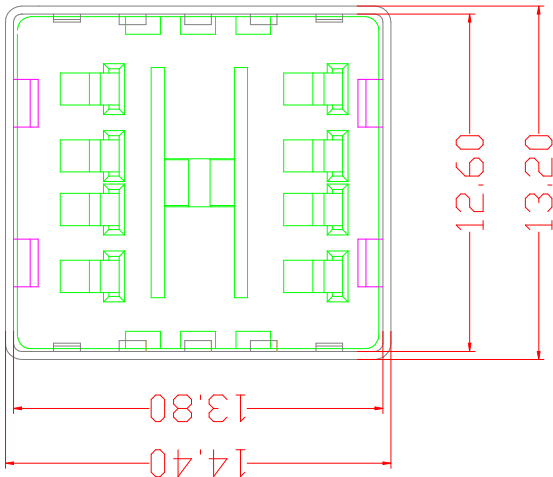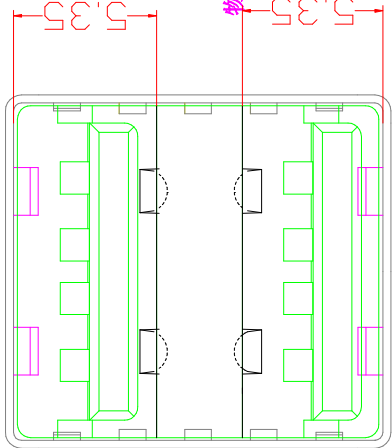

RECOMMENDED P.C.B PATTERN LAY OUT

深圳市顺宏康科技有限公司

RECOMMENDED P.C.B PATTERN LAY OUT
DRAWN

UNLESS OTHERWISE
SPECIFIED TOLERANCE

.X ±0.20
.XX ±0.15
.XXX ±0.10
ANG. ±2°

H.Q.huocuy

APPROVED

DATE

UNIT

MM

SCALE

3/1

SIZE

A4

TITLE

USB AF 双层直插14. 2MM无脚直边

PART NO.

SHK-20121

DOC. NO.

A

REV.

A