

规格说明:Specifications:

电气特性:Electrical:

- 1. 额定电流: Current Rating
1.5A/contact terminal
- 2. 额定电压: Voltage Rating
30V DC
- 3. 接触阻抗:Contact Resistance
30 milliohms MAX
- 4. 耐电压:Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
- 5. 绝缘阻抗:Insulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:




- 1. 插拔力: Cnnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 2. 端子保持力: Terminal Retenion
1.2kgf(MIN)

原材料:Material:

- 1. 塑胶:Housing:
Hing Temperature Tnermaplastics,
PBT White/Black
- 2. 端子:Contact:Copper Alloy C2680
- 3. 外壳:Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 1. 端子:Contact: Piated Gold in Mating Area;
Tin On Solder Talls
- 2. 外壳:Shell:
Nickel Plating

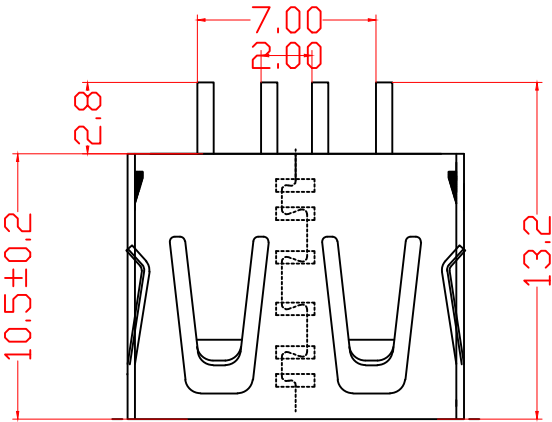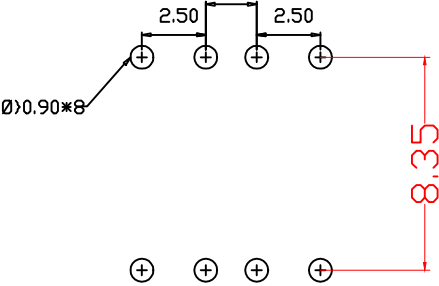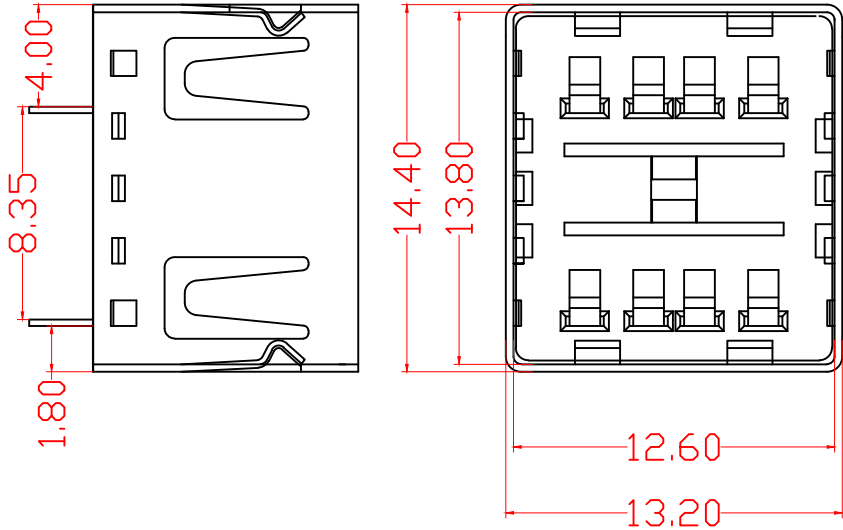

RBCOMMENDBD P.C.B PATTBRN LAY OUT

深圳市顺宏康科技有限公司

UNLESS OTHERWISE SPECIFIED TOLERANCE		DRAWN H.Q.huocy		UNIT MM		TITLE USB AF 双层直插10.5MM无脚直边		
.X	±0.20	APPROVED		SCALE 3/1		PART NO. SHK-20127		REV. A
.XX	±0.15	DATE 2011.03.18		SIZE A4		DOC. NO.		
.XXX	±0.10							
ANG.	±2°							