



REV.	ECN.NO.	APPD.
A	/	pcy



Remark:
1.MATERIAL:
1.1 Housing:thermoplastic plastics.
1.2 terminals:Copper Alloy
1.3 Front Shell:Copper Alloy/SPCC
Middle Shell:SPCC




2.characteristics:

- 2.1 Rating Voltage : 30V AC.
- 2.2 Rating Current:PIN1&PIN4(Vbus&Corresponding ground PIN)
1.8A MAX Other PINS 0.25A min.
- 2.3 Contact Resistance:PIN1&PIN4:30 mΩ MAX. Other PINS: 50 mΩ
- 2.4 Insulation Resistance:100 MΩ MIN.
- 2.5 Withstanding Voltage:AC 100V between adjacent contacts
- 2.6 Mating force: 3.57Kgf MAX(35N MAX)
- 2.7 Extraction force:1Kgf Min(9.8N Min)
- 2.8 Life test:1500Cycles MIN.
- 2.9 Temperature Range: -30℃~+80℃.



U321-092X-XXXXXR

1:iron alloy
Ni plating
5:Copper alloy
Ni plating
1:Au 1u"
3:Au 3u"
5:Au 5u"
7:Au 10u"
8:Au 15u"
A:Au 30u"
1:PA66
2:PBT
6:PCP

1:troy
2:Tube
8:Tape&Reel
9:Tape&Reel+Mylar
1:Black
7:Blue 300C
8:Blue 300C-1
C:Blue 300C-2
E:Blue 300C-3
9:Carbon black425C

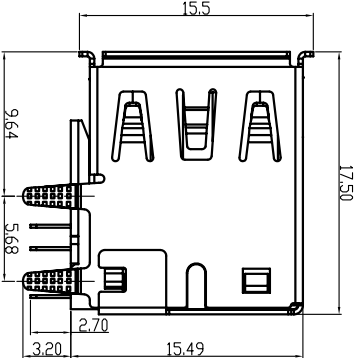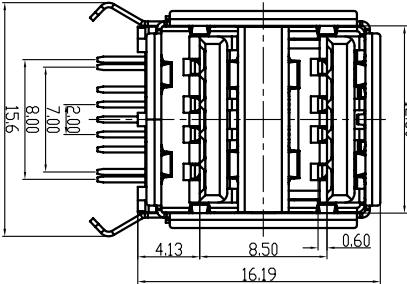

DATE
表示12月
表示2011年

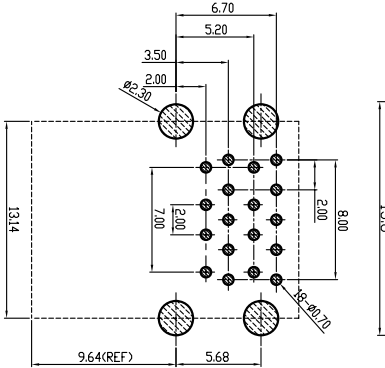

PCB LAYOUT REFERENCE

TOLERANCE UNLESS OTHERWISE SPECIFIED		OTHERWISE SPECIFIED	
XXX	±0.10	X"	±3"
.XX	±0.25	.X"	±2"
.X	±0.35		
APPROVED		PART NAME:	
CHECKED		PART No:	
DRAWED		PROJECTION:	
DATE		UNIT:	
2014.09.30		mm	
		SCALE	
		1:1	
		SHEET	
		1 OF 1	
		REV.	
		A	

深圳市顺宏康科技有限公司

USB 3.0 AF双层90度壳体

SHK-30134

C