
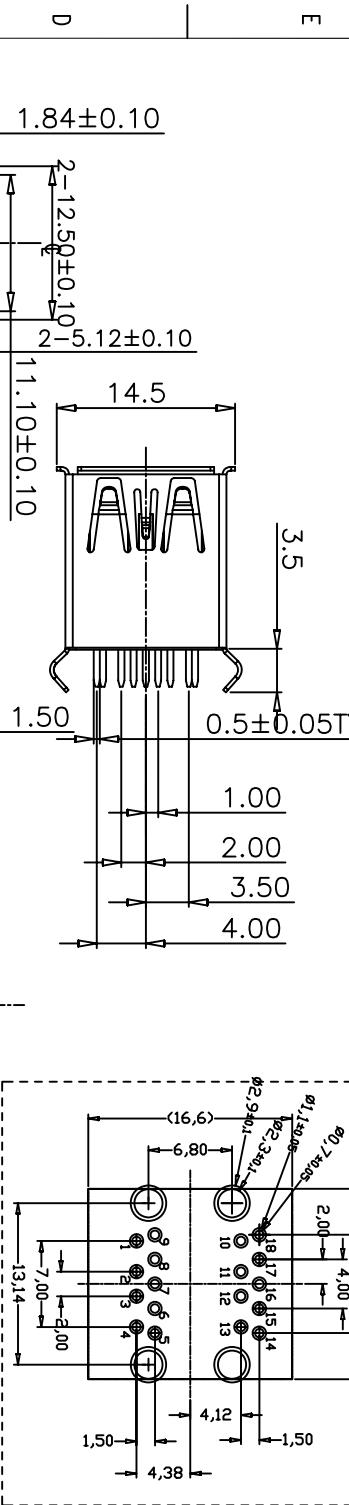



9      8      7      6      5      4      3      2      1

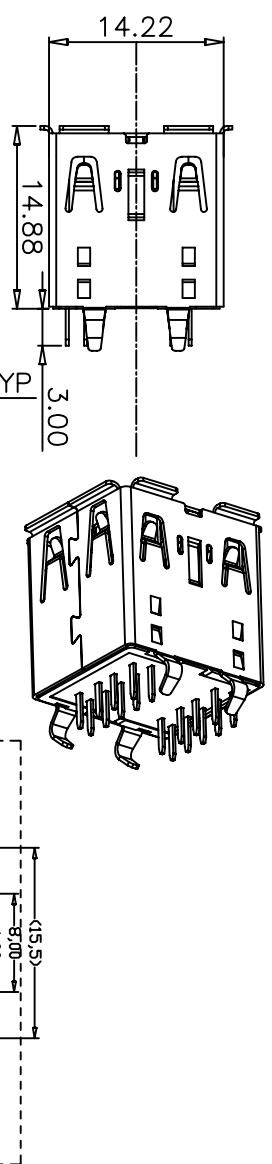


**SPECIFICATIONS:**  
 Contact current Rating:  
 1.8 Amperes for pin1&pin4.  
 0.25 Amperes other contacts  
 Dielectric Withstanding Voltage:AC 100V(RMS)  
 Insulation resistance:100Megohms Minimum.  
 Contact Resistance:  
 30mΩ Max for pin1&pin4  
 50mΩMax for other contacts  
**Mechanical Characteristics:**  
 Mating Force:35 Newtons Maximum  
 Unmating Force:10 Newtons Minimum  
 MATERIAL: 8N Min After Durability  
 Housing: PBT+30%GF 94V-0 COLOR:BLUE  
 Contact: copper alloy( T=0.25mm)  
 Shell: Brass


**PLATING:**  
 Contact: Au Plated on contact area

Tin Plated on solder area  
 Nickel underplating over all


**Shell:**  
 Nickel Plated  
 operating Temperature:-55°to+85°

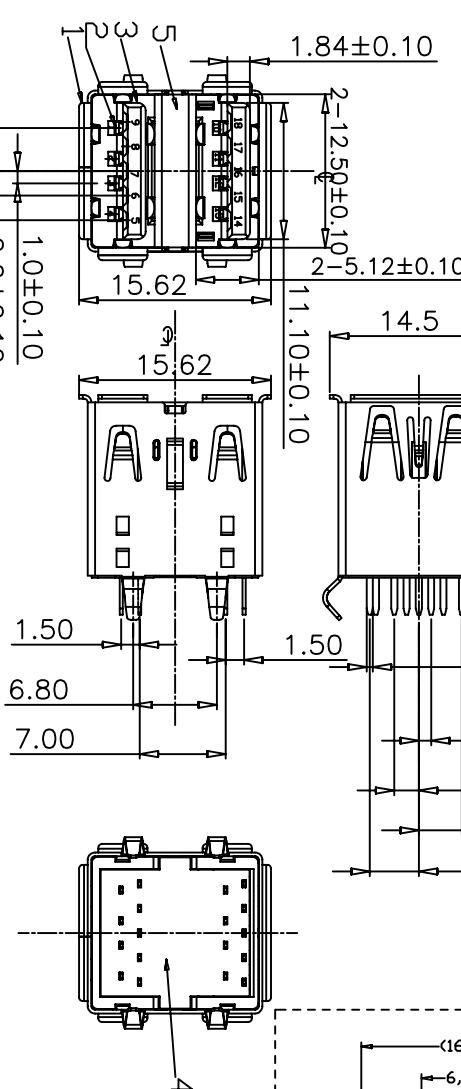

**C**



**B**



ITEM:	REVISION	REV BY	APPROVED	DATE	MATL:	SEE SPECIFICATION	APPROVED
A						OTHERWISE SPECIFIED XXX XX X ±0.10 ±0.20 ±0.30 ±3.	

料号 SHK-30135

产品名称: USB 3.0AR 双层180度  
 PART NAME: USB 3.0AR Double-sided 180°

PROJECTION: THIRD ANGLE PROJECTION

UNIT: mm SCALE 1:1 REV(No) A SHEET DRAWED ZouJianhui

深圳市顺宏康科技有限公司

9      8      7      6      5      4      3      2      1

**A**

**B**

**C**

**E**

**E**

**F**