

REV	LTR	DESCRIPTION	DATE	APPROVED
A0		依新料号编码规则发行图面	2015.07.20	LDJ

NOTES:

1. 材料







- 1.1: 外壳材质: 双光铁
- 1.2: 外壳电镀代码: 镀镍12H
- 1.3: 胶芯颜色代码: 蓝色
- 1.4: 胶芯材质&颜色: LCP蓝色
- 1.5: 端子材质: 磷铜.
- 1.6: 端子电镀: 半金锡G/F,

2. 产品规格:

- 2.1 额定电流: 1.5 A MIN 1PIN/4PIN 2.0A MAX
 - 2.2 绝缘阻抗: 1000M Ω MIN;
 - 2.3 接触阻抗: 30m Ω MAX;
 - 2.4 耐电压: 500V AC;
 - 2.5 工作温度: -55° C~+85° C
3. 插拔力性能要求:
- 3.1, 插入力: 3.57Kgf Max;
 - 3.2, 拔出力: 1.02Kgf Min;
 - 3.3, “*”为品管必须管控尺寸.
 - 3.4, 整套成品配合需顺畅.

深圳市顺宏康科技有限公司

TOLERANCES		TITLE: 0	
.X	±0.30	APPLD.:	USB A/F 3.0 沉板无背边SMT
.XX	±0.20	CHECK:	DRAWING NO.:
.XXX	±0.10	DRAWN:	KEY: SIZE: UNIT: SCALE: SHEET:
ANGLES ±3.00°		A/O	A4 M M 1:1 1/1

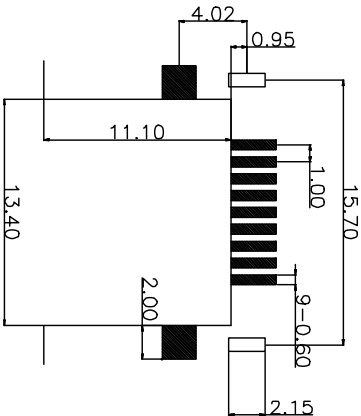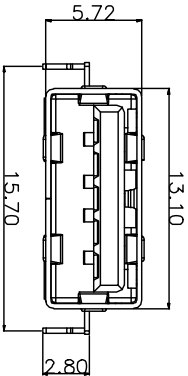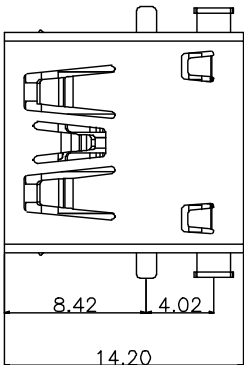

PCB LAYOUT