
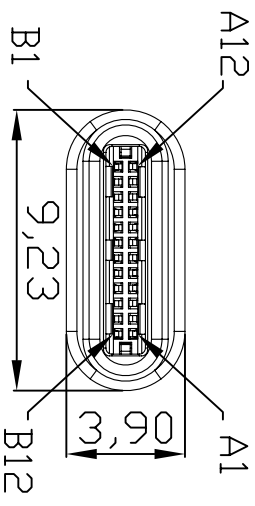


REV	LTR	DESCRIPTION	DATE	APPROVED
A0				

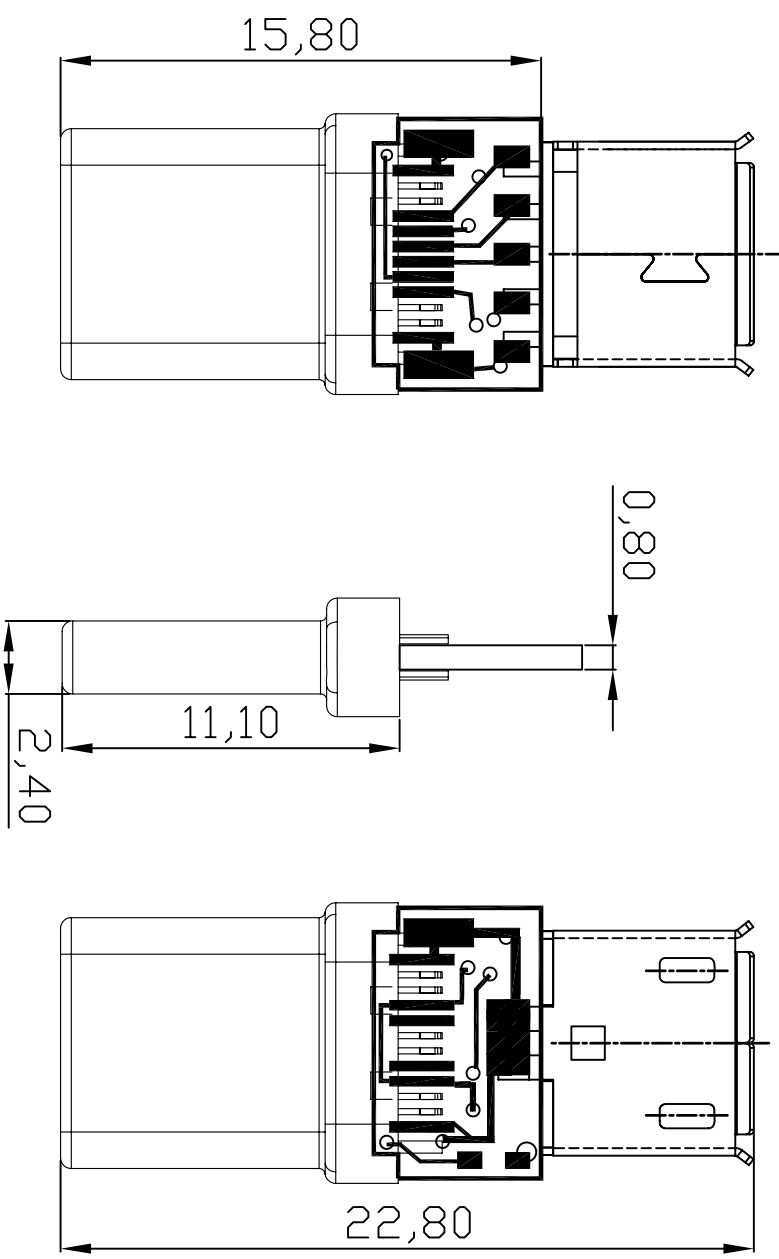

前端接口

- 备注
1. 材质: LCP+30%GF UL94V-0
  - 1.1 胶芯: CS191, T=0,20mm; 镀半金锡
  - 1.2 端子: 不锈钢, T=0,15mm; 表面镀镍
  - 1.3 外壳: 不锈钢, T=0,30mm; 表面镀镍
  - 1.4 卡钩: 不锈钢, T=0,10mm
  - 1.5 弹片: 不锈钢, T=0,10mm
  2. 主要特性:
    - 2.1 额定电流: 1,5A
    - 2.2 接触阻抗: 30mΩ MAX
    - 2.3 绝缘阻抗: 100MΩ MIN 250V DC
    - 2.4 耐压测试: 250V AC
    - 2.5 沾锡性: 温度250±5℃
    - 2.6 整体插入力: 3,57kgf MAX  
整体拔出力: 1,02kgf MIN
    - 2.7 使用寿命: 10000次
    - 2.8 工作温度: -30℃~+80℃

TOLERANCES	.X ±0.50
.XX ±0.20	
.XXX ±0.10	
ANGLES ±3.00°	
TITLE	USE 3.1 TYPE C拉伸款带POB C TO MICRO 有卷边
APPD.	
PART NO.	SHK-31158
DRAWING NO.	024-A021-1
REV.	A/0
SIZE	A4
UNITS	M M
SCALE	1 : 1
SHEET	1 / 1

