


1		2		3		6		7		8	
NO.	PART NO.	NAME	MATERIAL	COLOR	QTY	REVISIONS				DATE	
1	408-C020000	008 A/F 800A-001+2.310L (02.08.08)	Copper Alloy/SPCC		1PCS						2011.08.26
2	408-A000000	008 A/F 800A-002S	PBT		1PCS						2011.08.26
3	408-B000000	008 A/F 80° INTERMITTENT (02.08.08)	Copper Alloy		4PCS						2011.08.09

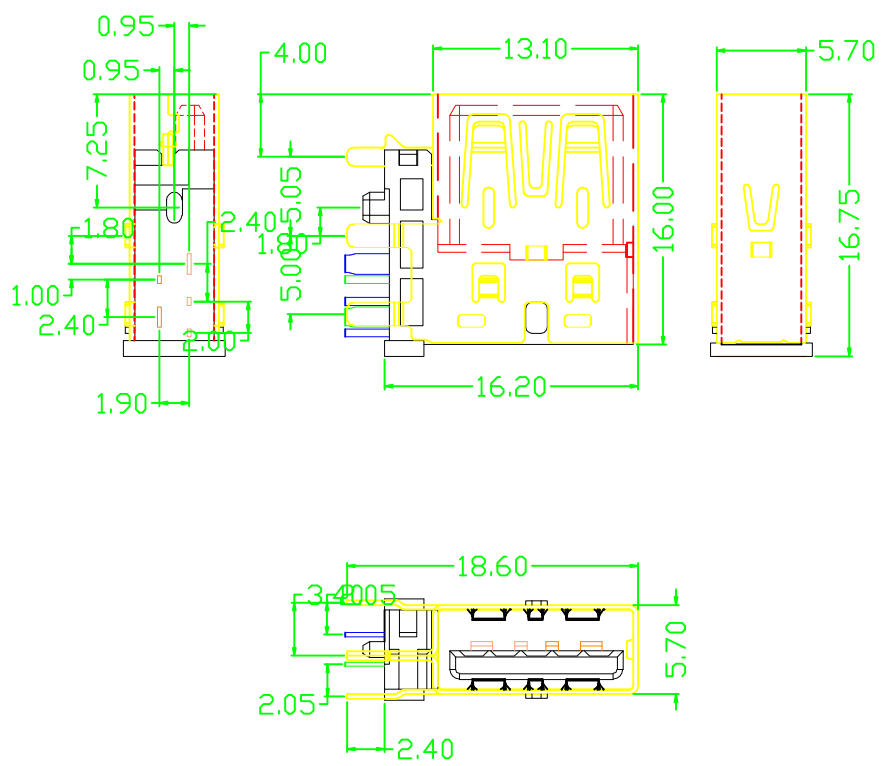

规格书: Specifications:

- 电气性能: Electrical:
 - 额定电流 Rating: 5.0A/contact terminal
 - 额定电压 Voltage Rating: 50V DC
 - 接触电阻 Contact Resistance: 50 milliohms MAX
 - 介电性能 Dielectric Withstanding Voltage: 300 V AC AT Sea Level
 - 绝缘电阻 Insulation Resistance: 1000MEGA ohms MIN
- 机械性能: Mechanical:
 - 额定插拔力 Connector Mate and Unmate Force: Mate force: 3.0kgf(MAX), Unmate force: 0.7kgf(MIN)
 - 耐插拔力 Terminal Retention: 1.2kgf(MIN)

材料: Material:

1. 壳体: Housing: Hing Temperature Thermoplastics, UI 94V-0 PBT White/Black
2. 端子: Contact: Copper Alloy C2680
3. 壳: Shell: Copper Alloy SPCC/C2680

表面处理: Finish:

1. 端子: Contact: Plated Gold in Mating Area; Tin On Solder Tails
2. 壳: Shell: Nickel Plating

TOLERANCES		MATERIAL: SHK-90165		UNIT: W/M		TYPED AREA		DRAWING BY: 孙志伟/Model: 插5针大板		CHECK BY: 孙志伟/Assembly	
A	B	C	D	E	F	G	H	I	J	K	L
±0.20	±0.30	±0.10	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05	±0.05
±0.10	±0.15	±0.05	±0.02	±0.02	±0.02	±0.02	±0.02	±0.02	±0.02	±0.02	±0.02
±0.05	±0.05	±0.02	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01	±0.01
±0.02	±0.02	±0.01	±0.005	±0.005	±0.005	±0.005	±0.005	±0.005	±0.005	±0.005	±0.005

SCALE: 1:1
REV: A

DATE: 2011.08.09
DATE: 2011.08.09

DATE: 2011.08.09

深圳市顺宏康科技有限公司