
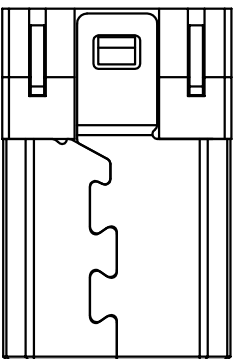
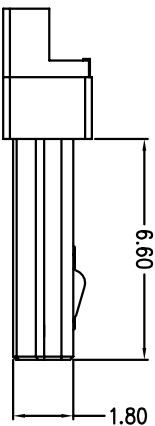

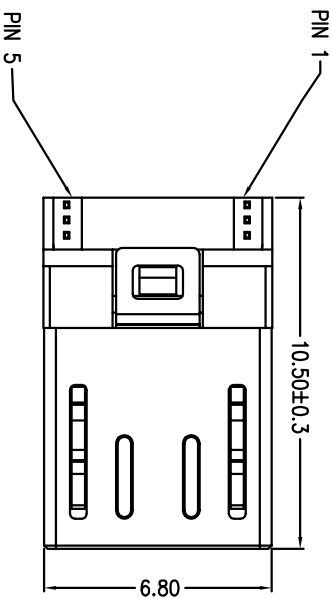



项目	变更类容	日期	修改人	核准
MARX	MODIFICATION	DATE	DRAW	APPROVE



NOTES:
1.MECHANICAL:
INSERTION FORCE: 35N MAX.
EXTRACTION FORCE:10N MIN(INITIAL),8~20N(AFTER)
DURABILITY: 10000 CYCLES MIN.
2.ELECTRICAL:
CURRENT: 1A MIN WITH PIN2,3,4;1.8A MIN WITH PIN1 & 5
VOLTAGE: 30V MAX
WITHSTANDING VOLTAGE: 100V AC
CONTACT RESISTANCE: 30 m² MAX
INSULATION RESISTANCE: 100M² MIN
3.ENVIRONMENTAL
TEMPERATURE RANGE:-30℃ ~ +80℃

成品图

深圳市顺宏康科技有限公司

4	Molding	1	LCP
3	Shell	1	Nickel
2	Contact	5	Au plated
1	Housing	1	LCP
No.	Name	Q'ty	Finish

单位	mm	材料	设计	料号
DATE	THICK	料厚	审核	PART NO.
SCALE	比例	料宽	核准	品名
WIDTH	行程	备注	角法	版本
PITCH	REMARK	REV.	T3	